

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization  
International Bureau



(43) International Publication Date  
15 June 2000 (15.06.2000)

PCT

(10) International Publication Number  
WO 00/34353 A30

(51) International Patent Classification<sup>7</sup>: C08G 18/48,  
18/08, 18/76

(21) International Application Number: PCT/US99/24013

(22) International Filing Date:  
9 November 1999 (09.11.1999)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:  
60/108,455 12 November 1998 (12.11.1998) US

(71) Applicant (for all designated States except US): COR-  
DANT TECHNOLOGIES, INC. [US/US]; Suite 1600,  
15 West Temple, Salt Lake City, UT 84101-1532 (US).

(72) Inventors; and

(75) Inventors/Applicants (for US only): SANDERSON, An-  
drew, J. [GB/US]; 2711 North, Mountain Road, North Og-  
den, UT 84414 (US). EDWARDS, Wayne [US/US]; 600S  
610 West, Tremonton, UT 84337 (US).

(74) Agents: SULLIVAN, Stephen, T. et al.; Sullivan Law  
Group, 5060 North 40th Street, Suite 120, Phoenix, AZ  
85018 (US).

(81) Designated States (national): AE, AL, AM, AT, AU, AZ,  
BA, BB, BG, BR, BY, CA, CH, CN, CR, CU, CZ, DE, DK,  
DM, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL,  
IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU,  
LV, MA, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT,  
RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA,  
UG, US, UZ, VN, YU, ZA, ZW.

(84) Designated States (regional): ARIPO patent (GH, GM,  
KE, LS, MW, SD, SL, SZ, TZ, UG, ZW), Eurasian patent  
(AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent  
(AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU,  
MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM,  
GA, GN, GW, ML, MR, NE, SN, TD, TG).

Published:  
— With international search report.

(88) Date of publication of the international search report:  
28 June 2001

(15) Information about Correction:  
Previous Correction:  
see PCT Gazette No. 48/2000 of 30 November 2000, Sec-  
tion II

For two-letter codes and other abbreviations, refer to the "Guid-  
ance Notes on Codes and Abbreviations" appearing at the begin-  
ning of each regular issue of the PCT Gazette.

(54) Title: METHOD FOR THE SYNTHESIS OF THERMOPLASTIC ELASTOMERS IN SOLUTION BY AZEOTROPIC DISTILLATION

and B blocks which are amorphous at temperatures above about 20°C are disclosed. The A blocks are derived from oxetane derivatives and/or tetrahydrofuran derivatives. The B blocks are derived from oxetanes, tetrahydrofuran, oxiranes, and derivatives thereof. The A blocks and B blocks are dissolved into solution containing a non-halogenated solvent, preferably tetrahydrofuran. The dissolved A blocks and B blocks are dried of water by azeotropic distillation of the non-halogenated solvent. Next, the dried A blocks and the dried B-blocks are end-capped with a diisocyanate having one isocyanate moiety substantially more reactive with the terminal groups of the blocks than the other isocyanate moiety, whereby the more reactive isocyanate moiety is capable of reacting with the terminal groups of the blocks, leaving the less reactive isocyanate moiety free and unreacted. The end capped A blocks and the end capped B blocks are linked together with a linking compound having two isocyanate reactive groups which are sufficiently unhindered to react with the free and unreacted isocyanate moieties of the end capped polymers.

## INTERNATIONAL SEARCH REPORT

Int'l. Application No.

PCT/US 99/24013

## A. CLASSIFICATION OF SUBJECT MATTER

IPC 7 C08G18/48 C08G18/08 C08G18/76

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 C08G C06B

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

WPI Data, EPO-Internal, PAJ

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	GB 2 307 688 A (THIOLKOL) 4 June 1997 (1997-06-04)  claims; examples	1-3, 12-21, 30-33
A	US 5 210 153 A (MANSER ET AL) 11 May 1993 (1993-05-11)  column 6, line 27 - line 36; claims 1,7; examples	1-3, 15-21, 30-33
A	US 4 806 613 A (WARDLE) 21 February 1989 (1989-02-21) cited in the application claims; examples	1-3, 12-21, 30-33

☐ Further documents are listed in the continuation of box C.☒ Patent family members are listed in annex.

## \* Special categories of cited documents:

\*A\* document defining the general state of the art which is not considered to be of particular relevance

\*E\* earlier document but published on or after the international filing date

\*L\* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

\*T\* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

\*X\* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

\*Y\* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is taken alone or in combination with other prior art documents, such combination being obvious to persons skilled in the art

document member of the same patent family

Date of the actual completion of the international search

4 September 2000

Date of mailing of the international search report

11/09/2000

Name and mailing address of the ISA

European Patent Office, European Patent Bureau,  
NL - 2280 HV Rijswijk  
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,  
Fax: (+31-70) 340-3016

Authorized officer

Angiolini, D

# INTERNATIONAL SEARCH REPORT

Information on patent family members

Int'l. Application No

PCT/US 99/24013

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
GB 2307688 A	04-06-1997	NONE	
US 5210153 A	11-05-1993	NONE	
US 4806613 A	21-02-1989	CA 1318052 A	18-05-1993
		DE 68928734 D	20-08-1998
		DE 68928734 T	21-01-1999
		EP 0335499 A	04-10-1989
		JP 2014216 A	18-01-1990
		JP 2705821 B	28-01-1998



## INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

<b>(51) International Patent Classification</b> <sup>7</sup> : <b>C08G 18/08, 18/76</b>	<b>A2</b>	<b>(11) International Publication Number:</b> <b>WO 00/34353</b> <b>(43) International Publication Date:</b> 15 June 2000 (15.06.00)
<b>(21) International Application Number:</b> PCT/US99/24013 <b>(22) International Filing Date:</b> 9 November 1999 (09.11.99) <b>(30) Priority Data:</b> 60/108,455 12 November 1998 (12.11.98) US <b>(71) Applicant (for all designated States except US):</b> CORDANT TECHNOLOGIES, INC. [US/US]; Suite 1600, 15 West Temple, Salt Lake City, UT 84101-1532 (US). <b>(72) Inventors; and</b> <b>(75) Inventors/Applicants (for US only):</b> SANDERSON, Andrew, J. [GB/US]; 2711 North, Mountain Road, North Ogden, UT 84414 (US). EDWARDS, Wayne [US/US]; 600S 610 West, Tremonton, UT 84337 (US). <b>(74) Agents:</b> COLTON, Kendrew, H. et al.; Pillsbury Madison & Sutro, LLP, 1100 New York Avenue, N.W., Washington, DC 20005 (US).		<b>(81) Designated States:</b> AE, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CR, CU, CZ, DE, DK, DM, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).  <b>Published</b> <i>Without international search report and to be republished upon receipt of that report.</i>
<b>(54) Title:</b> METHOD FOR THE SYNTHESIS OF ENERGETIC THERMOPLASTIC ELASTOMERS IN NON-HALOGENATED SOLVENTS		
<b>(57) Abstract</b> <p>A method of preparing a thermoplastic elastomer having A blocks which are crystalline at temperatures below about 75 °C and B blocks which are amorphous at temperatures above about -20 °C is disclosed. The A blocks are derived from oxetane derivatives and/or tetrahydrofuran derivatives. The B blocks are derived from oxetanes, tetrahydrofuran, oxiranes, and derivatives thereof. The A blocks and B blocks are dissolved into solution containing a non-halogenated solvent, preferably tetrahydrofuran. The dissolved A blocks and B blocks are dried of water by azeotropic distillation of the non-halogenated solvent. Next, the dried A blocks and the dried B-blocks are end-capped with a diisocyanate having one isocyanate moiety substantially more reactive with the terminal groups of the blocks than the other isocyanate moiety, whereby the more reactive isocyanate moiety is capable of reacting with the terminal groups of the blocks, leaving the less reactive isocyanate moiety free and unreacted. The end-capped A blocks and the end-capped B blocks are linked together with a linking compound having two isocyanate-reactive groups which are sufficiently unhindered to react with the free and unreacted isocyanate moieties of the end-capped polymers.</p>		

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

[illegible]

## METHOD FOR THE SYNTHESIS OF ENERGETIC THERMOPLASTIC ELASTOMERS IN NON-HALOGENATED SOLVENTS

### BACKGROUND OF THE INVENTION

5

#### 1. Field of the Invention

This invention relates to a method of synthesizing energetic thermoplastic elastomers which are useful as binders of high energy compositions, such as rocket motor propellants, gun propellants, explosive munitions, gas generants of vehicle supplemental restraint systems, or the like.

10

#### 2. Description of the Related Art

Solid high energy compositions, such as propellants, explosives, gas generants, and the like comprise solid particulates, such as fuel particulates and/or oxidizer particulates, dispersed and immobilized throughout a polymeric binder matrix.

15

Conventional solid composite propellant binders utilize cross-linked elastomers in which prepolymers are cross-linked by chemical curing agents. As outlined in detail in U.S. Patent No. 4,361,526, there are important disadvantages to using cross-linked elastomers as binders. Cross-linked elastomers must be cast within a short period of time after addition of the curative, which time period is known as the "pot life". Disposal of a cast, cross-linked propellant composition is difficult, and usually is accomplished by burning, which poses environmental problems. Furthermore, current state-of the-art propellant compositions have serious problems that include their use of nonenergetic binders which have lower performance and high end-of-mix viscosities.

25

In view of the inherent disadvantages associated with the use of cross-linked elastomeric polymers as binder materials, there has been considerable interest in

requirements expected of propellant formulations, particularly the requirement of

being processible below about 120°C, it being desirable that a thermoplastic elastomeric polymer for use as a binder in a high energy system have a melting temperature of between about 60°C and about 120°C. The melting temperature is desirably at least about 60°C because the propellant composition may be subject to  
5 somewhat elevated temperatures during storage and transport, and significant softening of the propellant composition at such elevated temperatures is unwanted. The setting of the melting temperature at not more than about 120°C is determined by the instability, at elevated temperatures, of many components which ordinarily go into high energy compositions, particularly oxidizer particulates and energetic plasticizers.  
10 Many thermoplastic elastomers exhibit high melt viscosities which preclude high solids loading and many show considerable creep and/or shrinkage after processing. Thermoplastic elastomers typically obtain their thermoplastic properties from segments that form glassy domains which may contribute to physical properties adverse to their use as binders. Crosslinkable thermoplastic elastomers are block  
15 copolymers with the property of forming physical cross-links at predetermined temperatures. One thermoplastic elastomer, e.g., Kraton, brand TPE, obtains this property by having the glass transition point of one component block above room temperature. At temperatures below 109°C, the glassy blocks of Kraton form glassy domains and thus physically cross-link the amorphous segments. The strength of  
20 these elastomers depends upon the degree of phase separation. Thus, it remains desirable to have controlled, but significant, immiscibility between the two types of blocks, which is a function of their chemical structure and molecular weight. On the other hand, as the blocks become more immiscible, the melt viscosity increases, thus having a deleterious effect on the processibility of the material.

25           Above-mentioned U.S. Patent No. 4,361,526 proposes a thermoplastic elastomeric binder which is a block copolymer of a diene and styrene, the styrene blocks providing the high melt viscosity and the diene blocks providing the low melt

processed with a volatile organic solvent. Solvent processing is undesirable inasmuch as the dissolved composition cannot be cast in a conventional manner, e.g., into a rocket motor casing. Furthermore, solvent-based processing presents problems with respect to removal and recovery of solvent.

5           The preparation of energetic thermoplastic elastomers prepared from polyoxetane block copolymers has been proposed in U.S. Patent No. 4,483,978 to Manser and U.S. Patent No. 4,806,613 to Wardle ("the '613 patent"), the complete disclosures of which are incorporated herein by reference to the extent that these disclosures are compatible with this invention. According to the latter, these materials  
10       overcome the disadvantages associated with conventional cross-linked elastomers such as limited pot-life, high end-of-mix viscosity, and scrap disposal problems.

          The thermoplastic materials proposed by the '613 patent involve elastomers having both (A) and (B) blocks, each derived from cyclic ethers, such as oxetane and oxetane derivatives and tetrahydrofuran (THF) and tetrahydrofuran derivatives. The  
15       monomer or combination of monomers of the (A) blocks are selected for providing a crystalline structure at usual ambient temperatures, such as below about 60°C, whereas the monomer or combination of monomers of the (B) blocks are selected to ensure an amorphous structure at usual ambient temperatures, such as above about -20°C. Typical of these materials is the random block copolymer (poly(3-  
20       azidomethyl-3-methyloxetane)-poly(3,3-bis(azidomethyl)oxetane), also known as poly(AMMO/BAMO). These block copolymers have good energetic and mechanical properties. Additionally, the block copolymers can be processed without solvents to serve as binders in high performance, reduced vulnerability explosive, propellant, and gas generant formulations. Advantageously, the block copolymers exhibit good  
25       compatibility with most materials used in such energetic formulations.

drawbacks have been associated with the use of the halogenated solvents disclosed in the '978 and '613 patents. One drawback is the detrimental impact that halogenated solvents have on the environment. Another drawback of halogenated solvents is attributable to the additional drying steps which the pre-polymer blocks are subject to after their formation. The pre-polymer blocks are typically dried either with chemical drying agent, e.g., desiccants followed by filtration or by the azeotropic removal of water. The azeotropic removal of water is performed with toluene, which is different from the solvent selected for linking the pre-polymer blocks. The performance of an additional drying step and the use of different solvents in the azeotropic drying step and the linking step complicates processing and increases overall processing time. Moreover, toluene does not completely dissolve the end-capped blocks prior to the linking reaction and can interfere with the end-capping and linking catalysts. Yet another drawback associated with halogenated solvents is the relatively low concentrations of pre-polymer blocks and linking compounds that may be loaded in halogenated solvents for processing. The loading of the thermoplastic elastomer ingredients is limited by the solubility of the ingredients in the solvent. For example, the currently used process for forming thermoplastic elastomers by linking energetic polyether diols and diisocyanates typically use approximately 30-40% by weight solutions of the reactants in dichloromethane and 0.1% by weight tin catalyst. Additionally, completion of the reaction in halogenated solvents typically takes several days to a week.

United States Patent No. 4,393,199 to Manser describes the use of a non-halogenated solvent, nitromethane, during cationic polymerization of cyclic ethers. However, it has been found that cyclic ether pre-polymer blocks are not sufficiently soluble in nitromethane to adequately link the pre-polymer blocks once they are formed.

drawbacks associated with halogenated solvents while reducing processing time and increasing productivity.

### SUMMARY OF THE INVENTION

It is, therefore, an object of this invention to provide a method for the  
5 synthesis of energetic thermoplastic elastomers that addresses the aforementioned problems associated with the related art and realizes the advancement expressed above.

In accordance with the principles of this invention, these and other objects are attained by a method of synthesizing an energetic thermoplastic elastomer binder that  
10 is in a solid state at room temperature and is derived from A blocks which are crystalline at temperatures below about 60°C and B blocks are amorphous at temperatures above about -20°C. The A blocks may include one or more polyethers derived from monomers of oxetane derivatives and/or tetrahydrofuran derivatives. The B blocks may include one or more polyethers derived from monomers of oxetane  
15 and its derivatives, tetrahydrofuran and its derivatives, and/or oxirane and its derivatives. The polyoxetane blocks A and polyoxirane blocks B may be linked by end-capping the blocks with diisocyanates and linking the end-capped blocks with difunctional linking chemicals in which each of the two terminal functional groups are reactive with an isocyanate moiety of the diisocyanate.

20 In accordance with one embodiment of this method, the A and B blocks are dissolved into solution comprising one or more non-halogenated solvents. The solvent or solvents selected preferably are capable of dissolving more than 25% by weight of the blocks (based on total weight of the solvents and blocks) into solution, more preferably at least 35% by weight into solution, and still more preferably 50%  
25 by weight into solution. The solvents preferably do not interfere with the end capping catalyst, such as dibutyltin dilaurate.

and ketones. Tetrahydrofuran is the preferred solvent because of its excellent solubility. The A and B blocks are mixed together at approximately the stoichiometric ratios that the blocks are intended to be present in the energetic thermoplastic elastomer. The solution is then dried by azeotropic removal of water with excess solvent. The A and B blocks are end-capped in the solvent with one or more diisocyanates. The end-capping may be performed prior or subsequent to the mixing step, but subsequent to the drying step. The diisocyanate preferably has one isocyanate moiety which is more reactive, preferably at least about five times as reactive, with the terminal hydroxyl group of each of the blocks than the other isocyanate moiety, whereby the more reactive isocyanate moiety tends to react with the terminal-hydroxyl groups of the blocks, leaving the less reactive isocyanate moiety free and unreactive. The mixture is reacted with a chain extender having two isocyanate-reactive groups that are sufficiently unhindered to react with the free and unreacted isocyanate groups of the end-capped blocks. In this manner, the end-capped blocks are linked, but not crosslinked, to form a thermoplastic elastomer.

It is still a further object of this invention to provide a method for making propellants, especially rocket propellants and gun propellants, explosives, gas generants, or the like containing an energetic thermoplastic elastomer binder by procedures including the above-discussed method.

These and other objects, features, and advantages of the present invention will become apparent from the accompanying drawings and following detailed description which illustrate and explain, by way of example, the principles of this invention.


#### BRIEF DESCRIPTION OF THE DRAWINGS

The accompanying drawings are provided to facilitate an understanding of the principles of this invention. In such drawings, FIGS. 1 and 2 are graphs showing the properties of a thermoplastic elastomer prepared in accordance with an embodiment

## DETAILED DESCRIPTION OF THE INVENTION

The thermoplastic elastomer  $(AB)_n$  polymers of this invention include A blocks which are crystalline at temperatures below about  $60^\circ\text{C}$ , preferably at temperatures below about  $75^\circ\text{C}$ , and B blocks which are amorphous at temperatures down to about  $-20^\circ\text{C}$ . Each of the A and B blocks are polyethers derived from cyclic ethers. Specifically, the A blocks are derived from monomers of oxetane derivatives and/or THF derivatives. The B blocks are derived from monomers of oxetane and its derivatives, THF and its derivatives, and/or monomers of oxirane and its derivatives, preferably energetic oxirane derivatives. The polymers melt at temperatures between about  $60^\circ\text{C}$  and about  $120^\circ\text{C}$ , and more preferably between about  $75^\circ\text{C}$  and about  $100^\circ\text{C}$ . The A and B blocks are mutually miscible in the melt. Consequently, the melt viscosity of the block copolymer decreases rapidly as the temperature is raised above the melting point, whereby high energy formulations may include high solids content, e.g., up to about 95% by weight of solid particulates, and can be easily processed. The invention also includes other thermoplastic elastomer block structures, such as ABA tri-block polymers and  $A_nB$  star polymers. Contributing to the miscibility of the A and B blocks is their similar chemical structure.

Oxetane monomer units that may be used in forming the A and B blocks of the present invention have the general formula:

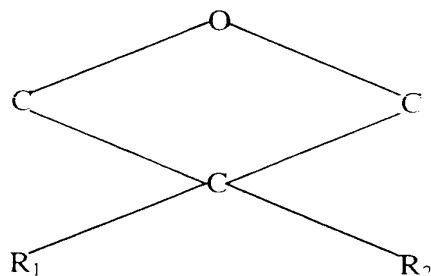


wherein the  $R_1$  and  $R_2$  groups are the same or different and are selected from moieties having the general formula:  $-(CH_2)_nX$ , where  $n$  is 0-10 and  $X$  is selected from the group consisting of -H, -NO<sub>2</sub>, -CN, -Cl, -F, -O-alkyl, -OH, -I, -ONO<sub>2</sub>, -N(NO<sub>2</sub>)-alkyl, -C≡CH, -Br, -CH=CH(H or alkyl), -CO<sub>2</sub>-(H or alkyl), -N(H or alkyl)<sub>2</sub>,  
5 -O-(CH<sub>2</sub>)<sub>1-5</sub>-O-(CH<sub>2</sub>)<sub>0-8</sub>-CH<sub>3</sub>, and N<sub>3</sub>.

Examples of oxetane derivatives that may be used in forming the A blocks in accordance with this invention are generally symmetrically-substituted oxetanes including, but are not limited to, the following: BEMO (3,3-  
(bis(ethoxymethyl)oxetane), BCMO (3,3-bis(chloromethyl)oxetane), BMMO (3,3-  
10 bis(methoxymethyl)oxetane), BFMO (3,3-bis(fluoromethyl)oxetane), BAOMO (3,3-bis(acetoxymethyl)oxetane), BHMO (3,3-bis(hydroxymethyl)oxetane), BMEMO (3,3-bis(methoxyethoxymethyl)oxetane), BIMO (3,3-bis(iodomethyl)oxetane), BNMO (3,3-bis(nitratomethyl)oxetane), BMNAMO (3,3-bis(methylnitraminomethyl)oxetane), and BAMO (3,3-bis(azidomethyl)oxetane).


15 Examples of oxetanes derivatives that may be used in forming the B blocks in accordance with this invention are generally unsymmetrically-substituted oxetanes including, but are not limited to, the following: HMMO (3-hydroxymethyl-3-methyloxetane), OMMO (3-octoxymethyl-3-methyloxetane), CMMO (3-chloromethyl-3-methyloxetane), AMMO (3-azidomethyl-3-methyloxetane), IMMO  
20 (3-iodomethyl-3-methyloxetane), PMMO (3-propynomethylmethyloxetane), NMMO (3-nitratomethyl-3-methyloxetane), and MNAMMO (3-methylnitraminomethyl-3-methyloxetane).

Tetrahydrofuran monomer units that may be used in forming the blocks of the present invention have the general formula:

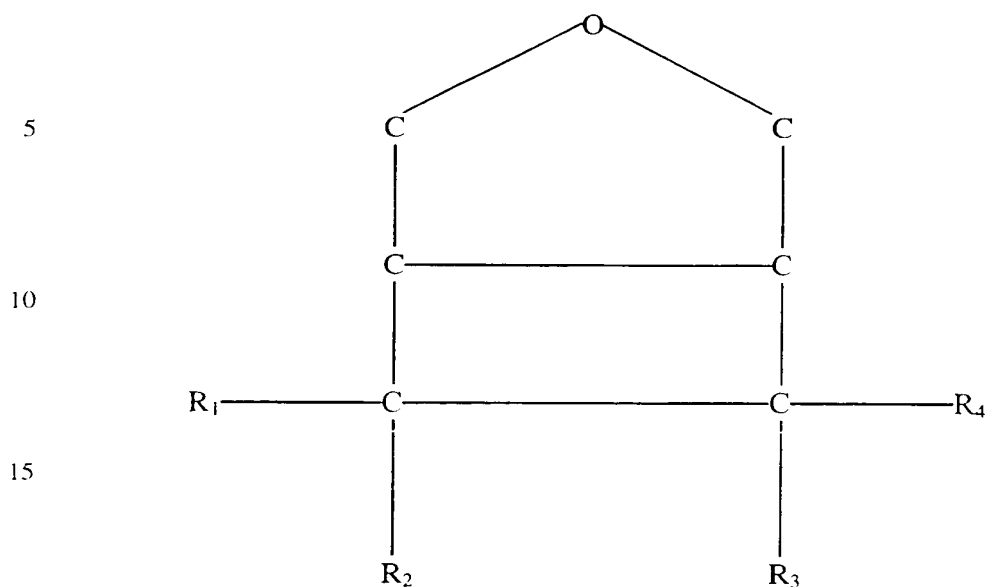

20 wherein the  $R_1$ - $R_4$  groups are the same or different and are selected from moieties set forth above in connection with the description of suitable oxetane derivatives.

Oxirane monomer units used in forming the B blocks of the present invention have the general formula:

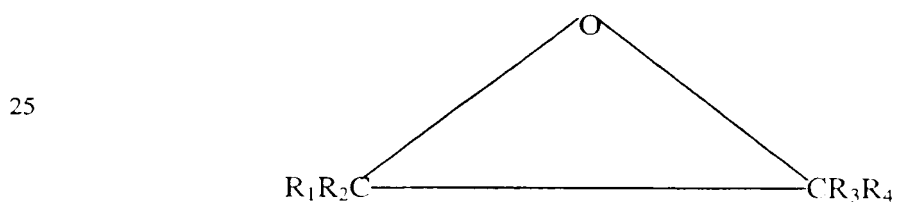

wherein  $R_1$  and  $R_3$  are independently selected from hydrogen and methyl, and  $R_2$  and  $R_4$  are independently selected from hydrogen, alkyl containing from 1 to 10 carbon atoms, chloroalkyl and bromoalkyl containing 1 to 2 carbon atoms, and nitroalkyl, nitroalkoxyalkyl, nitroalkyl, nitroalkoxyalkyl, azidoalkyl, azidoalkoxyalkyl,

30

fluoronitroalkyl, and fluoronitroalkoxyalkyl containing 1 to 5 carbon atoms provided that at least one of  $R_1$  to  $R_4$  is not hydrogen.

Examples of energetic oxiranes that may be used in forming the B blocks in accordance with this invention include, but are not limited to glycidyl azide polymers (C<sub>3</sub>H<sub>5</sub>N<sub>3</sub>O) (GAP), especially difunctional GAP, and poly(glycidyl nitrate) (C<sub>3</sub>H<sub>5</sub>NO<sub>4</sub>) (PGN). These polymers have a glass transition temperature below about -20°C and are amorphous at temperatures above -20°C.

Forming thermoplastic elastomers in accordance with the invention involves (1) formation of at least one polyether-derived homopolymer, copolymer, or terpolymer serving as the A blocks and crystalline in nature with a relatively elevated melting point, i.e., between about 60°C and about 120°C, preferably near 80°C and (2) formation of at least one polyether-derived homopolymer, copolymer, or terpolymer serving as the B blocks and amorphous in structure with a glass transition temperature ( $T_g$ ) below about -20°C.

The selection of the A block may be made based on the properties desired for the intended application of the thermoplastic elastomer. Examples of preferred crystalline A blocks include blocks possessing high energy density, such as those formed from BAMO and/or BMNAMO monomers. Melting temperature and ether oxygen content are additional factors that may be taken into consideration in selecting the monomers.

The properties of the block polymer depends upon the molecular weights of the individual blocks and the total molecular weights. Typically the A blocks have number average molecular weights ranging from about 3000 to about 8000, whereas the B blocks have number average molecular weights ranging from about 3000 to about 15,000. The weight ratio of A blocks to B blocks is preferably between about

15:85 to about 40:60. The preferred sizes of the A and B blocks for any particular binder application may be empirically determined.

The thermoplastic elastomers of this invention preferably are in a solid state at room temperature, have a weight average molecular weight of at least 40,000, more preferably at least 60,000, still more preferably at least 80,000, and a number average molecular weight of at least 10,000, more preferably at least 12,000, still more preferably at least 15,000.

Thermoplastic elastomers produced in accordance with the present invention may be admixed with other components of a high energy formulation, such as a propellant formulation. The binder system, in addition to the thermoplastic elastomers, may optionally contain one or more plasticizers for improving the resistance of the thermoplastic elastomer to hardening at low temperatures, which may be included at a plasticizer-to-thermoplastic elastomer weight ratio of up to about 1:1. Suitable high energy plasticizers include glycidyl azide polymer (GAP), nitroglycerine, butanetriol trinitrate (BTTN), alkyl nitratomethyl nitramines, trimethylolethane trinitrate (TMETN), diethylene glycol dinitrate, triethylene glycol dinitrate (TEGDN), bis(dinitropropylacetal/-bis(dinitropropyl)formal (BDNPA/F), and mixtures thereof. Inert plasticizers can also be used. Representative inert plasticizers include, by way of example, dioctyladipate (DOA), isodecylperlargonate (IDP), dioctylphthalate (DOP), dioctylmaleate (DOM), dibutylphthalate (DBP), oleyl nitrile, triacetin, and combinations thereof. The binder system may also contain a minor amount of a wetting agent or lubricant that enables higher solids loading.

The solids content of the high energy composition generally ranges from about 50 wt% to about 95 wt%, higher solids loading generally being preferred so long as such loading is consistent with structural integrity. The solids include fuel material particles and powders (collectively referred to herein as particulates), such as

aluminum, magnesium, boron, and beryllium. Representative oxidizers and co-oxidizers include ammonium perchlorate; hydroxylammonium nitrate (HAN); ammonium dinitramide (ADN); hydrazinium nitroformate; ammonium nitrate; nitramines such as cyclotetramethylene tetranitramine (HMX) and cyclotrimethylene trinitramine (RDX), 2,4,6,8,10,12-hexanitro-2,4,6,8,10,12-hexaazatetracyclo[5.5.0.0<sup>5,9</sup>.0<sup>3,11</sup>]-dodecane or 2,4,6,8,10,12-hexanitrohexaazaisowurtzitane (CL-20 or HNIW), and/or 4,10-dinitro-2,6,8,12-tetraoxa-4,10-diazatetracyclo[5.5.0.0<sup>5,9</sup>.0<sup>3,11</sup>]dodecane (TEX), and any combination thereof. In addition, the high energy composition may include minor amounts of additional components known in the art, such as bonding agents, burn rate modifiers, ballistic modifiers (e.g., lead), etc.

The thermoplastic elastomer may be mixed with the solids and other components of high energy formulation at temperatures above its melting temperature. Blending may be done in conventional mixing apparatus. Because of the low viscosities of the molten polymer, no solvents are required for blending or other processing, such as extrusion.

An important advantage of having a binder which is meltable is that the elastomer from an outdated device containing can be melted down and reused. At the time of such remelting, the binder might be reformulated, e.g., by addition of additional fuel or oxidizer particulates. Accordingly, the thermoplastic elastomer provides for its eventual recycle, as opposed to the burning required for disposal of cross-linked compositions. Because the "pot life" of the thermoplastic propellant exceeds that which would reasonably be required of a propellant or explosive formulation, if any problems develop during casting, the process can be delayed as long as is reasonably necessary, merely by maintaining the formulation in a molten state.

The oxetane homopolymer blocks may be formed according to the cationic polymerization technique taught by Manser in U.S. Patent No. 4,393,199, the complete disclosure of which is incorporated herein by reference. The oxirane homopolymer blocks may be formed according to the technique taught in U.S. Patent  
5 No. 5,120,827, the complete disclosure of which is incorporated herein by reference. The technique employs an adduct of a substance such as a diol, e.g., 1,4-butane diol (BDO), and a catalyst for cationic polymerization, e.g.,  $\text{BF}_3$ -etherate. This adduct forms with the oxetane monomer an initiating species which undergoes chain extension until n moles of monomer have been incorporated in the molecule, n being  
10 the ratio of monomers to adduct present. By adjusting the ratio of monomers to adduct present, the average molecular weight of the polymer which forms may be adjusted. If two or more monomers are present, incorporation of the monomers will be generally random but may depend upon the relative reactivities of the monomers in the polymerization reaction.

15 Another suitable catalyst system includes co-catalytically effective quantities of one or more triethoxonium salts and one or more alcohols, as disclosed in U.S. Application No. 08/233,219, the complete disclosure of which is incorporated herein by reference to the extent that the disclosure is compatible with this invention. Examples of triethoxonium salts include triethoxonium hexafluorophosphate,  
20 triethoxonium hexafluoroantimonate, and triethoxonium tetrafluoroborate.

It is understood that although the isocyanate-reactive terminal functional groups of the blocks are referred to herein as being hydroxyl groups, the isocyanate-reactive functional groups may also be amines, amides, and/or carboxyl groups.

The crystalline polyoxetane A blocks and amorphous B blocks, i.e., the  
25 respective prepolymers, are each end-capped together or separately with one or more diisocyanates. The end-capped A and B blocks are mixed together and joined by a

sufficiently unhindered to allow them to react with the free isocyanate moieties of the end-capped copolymers and thereby join the blocks together.

Oxetane, THF, and oxirane polymer blocks normally have terminal isocyanate-reactive (e.g., hydroxyl) functions which are end-capped with the diisocyanates in accordance with the invention. Preferably, a first one the isocyanate moieties of the end-capping compound is substantially more reactive with the terminal-hydroxyl moieties of the polymer blocks than the other (e.g., second) isocyanate moiety. One of the problems with linking these types of polymer blocks is that substituted oxetane-derived hydroxyl end groups units have neopentyl structures, whereby the terminal primary hydroxyl moieties are substantially hindered and therefore less reactive. The blocks derived from the oxirane derivatives are secondary alcohols, making their hydroxyl groups less reactive than the primary hydroxyl group of the oxetane-derived A-block. The diisocyanate preferably is selected so that one of the isocyanate groups is capable of reacting with a hydroxyl-group of the polymer blocks while the other isocyanate moiety remains free and unreacted. Diisocyanates are preferably used because isocyanates of higher functionality would result in undesirable levels of cross-linking. The different reactivities of the isocyanate moieties is desirable to ensure that substantial chain extension through linking of like blocks does not occur. Thus, for purposes of this invention, one isocyanate moiety of the diisocyanate should preferably be approximately five times more reactive with terminal hydroxyl groups of oxetane and oxirane blocks than the other group. Preferably one isocyanate moiety is at least about ten times more reactive than the other.

One diisocyanate which is especially useful for purposes of the invention is 2,4-toluene diisocyanate (TDI) in which the isocyanate moiety in the 4-position is substantially more reactive with hindered terminal hydroxyl moieties than the isocyanate moiety in the 2-position. Isophorone diisocyanate (IPDI) is suitable for

not worked well include diphenylmethylene diisocyanate (MDI) and hexamethylene diisocyanate (HDI).

In the end-capping reaction, the diisocyanate is used at an approximately stoichiometric molar amount relative to terminal hydroxyl groups on the polymer chain. Thus, if the polymer chain has a pair of terminal hydroxyl groups, approximately two molar equivalents, e.g., 1.75-2.2 molar equivalents of diisocyanate are used. In the ideal reaction, all of the more reactive isocyanate moieties would react with terminal hydroxyl groups, leaving all of the less reactive isocyanate moieties free. Practically, not all of the diisocyanate reacts in this manner, and some chain extension does occur. Thus, the end-capping reaction may be maximized for particular polymer chains by some adjustment in the relative molar ratios of polymer block and diisocyanate.

In one variant embodiment, the A blocks and B blocks are reacted separately with the diisocyanate, so that there is no competition of the blocks for diisocyanate molecules and each separate end-capping reaction may be carried to substantial completion. The diisocyanate may react more rapidly with one block than the other, but this difference can be compensated for by a longer reaction time with the slower reacting block. The reactivity of the terminal hydroxyl groups varies according to steric factors and also according to side-chain moieties. Energetic oxetanes, for example, generally have side-chain moieties that are electron-withdrawing, making their terminal hydroxyl groups less reactive. Once end-capped with diisocyanate, the reactivities of the polymers for linking purposes is essentially dependent only upon the reactivity of the free isocyanate, not on the chemical makeup of the polymer chain itself. Thus end-capped (A) blocks are substantially as reactive as end-capped (B) blocks.

The end-capping reaction is promoted by a suitable urethane catalyst. A

preferably two labile groups, such as chloride or acetate, bound directly to the tin. Suitable tin catalyst include diphenyl tin dichloride, dibutyl tin dichloride, dibutyl tin dilaurate, dibutyl tin diacetate. Tertiary amine catalysts may also be used.

The linking compound is one which has two functional groups which are  
5 sufficiently unhindered to react with the free isocyanate moieties on the end-capped blocks so as to link A blocks to B blocks, A blocks to A blocks, and B blocks to B blocks in a urethane reaction. Preferred functional groups are hydroxyl groups, although amine, amide, and carboxyl groups, and mixtures thereof also react in a urethane reaction. Primary functional groups are preferred. The linking compound  
10 may be a short, straight carbon chain having terminal hydroxyl groups, e.g., 1,4-butanediol, 1,3-propanediol, ethylene glycol, and 1,6-hexanediol. The linking compound should also be miscible with and rapidly dissolve in the non-halogenated solvent so as to ensure chain extension without unwanted amounts of cross-linking.

Alternatively, the linking compound may be an oligomer, especially a  
15 urethane oligomer, having two functional groups which are sufficiently unhindered to react with the free isocyanate moieties on the end-capped blocks so as to link A blocks to B blocks, A blocks to A blocks, and B blocks to B blocks via a urethane reaction. Preferred functional groups of the oligomer are hydroxyl groups, although amine, amide, and carboxyl groups, and mixtures thereof also react in a urethane  
20 reaction. Primary functional groups are preferred.

An oligomeric glycol containing urethane moieties is preferably used to react the free isocyanate moieties on the end-capped blocks. The oligomeric glycol may be prepared from a mixture of one or more diisocyanates and an excess amount of one or more diols. The diisocyanate(s) and diol(s) selected and the ratio of these reagents  
25 may be varied to tailor the properties of the thermoplastic elastomer. The diol-to-diisocyanate molar ratio is preferably selected to be between 5:1 to 5:4, more

linking of the isocyanate-capped prepolymers, and improve the thermomechanical properties of the final thermoplastic elastomer. A suitable urethane reaction catalyst promotes the reaction between the diisocyanate(s) and diol(s) to form oligomers. The catalysts discussed above in connection with the linking of the A and B blocks are suitable for this purpose. Representative diols that may be selected for preparing the difunctional oligomer include, by way of example, unbranched aliphatic diols having 2 to 7 carbon atoms, such as ethylene glycol, propylene glycol, butylene glycol; and cycloaliphatic diols such as 1,4-cyclohexanedimethanol, and any combination thereof. Representative diisocyanates for preparing the difunctional oligomer include, by way of example, aliphatic diisocyanates such as hexane diisocyanate, and aryl diisocyanates such as methylene-bis(4-phenyl isocyanate), phenylene diisocyanate, toluene diisocyanate, and xylylene diisocyanate, and any combination thereof. Preferably, the difunctional oligomer has a number average molecular weight  $M_n$  of from 350 to 900.

It is to be appreciated that a wide variety of difunctional compounds may be used to link the end-capped blocks.

As in the end-capping reaction, some solvent is preferably used, as is a catalyst, such as described above. Conveniently, the reaction mixtures of the A blocks and B blocks may be mixed together without prior separation of the blocks from their respective end-capping reaction mixtures. The linking compound can be added directly to this mixture of A and B blocks. The catalyst is thereby already present when the linking compound is added.

The linking compound is added in an amount such that the total number of linking-compound functional groups approximately equals the total number of free isocyanate groups of the end-capped polymer blocks. Thus, to provide an  $(AB)_n$  polymer with multiple blocks in each chain, the linking compound to polymer block

molar ratio is in the range of 0.9-1.1, e.g., 1.0. Accordingly, optimal molar ratios of blocks and linking chemicals may have to be empirically determined.

The end-capping reaction and linking reaction are carried out in a suitable non-halogenated solvent, e.g., one which dissolves the polymer and does not react with the free isocyanate moieties. Although insubstantial amounts of halogenated solvent may be present, the solution is preferably completely free of any halogenated solvent. The non-halogenated solvent should not react in the urethane reaction and forms an azeotrope with water. Suitable dry solvents include cyclic ethers such as tetrahydrofuran (THF) and 1,4-dioxane; non-cyclic ethers such as ethylene glycol dimethyl ether; ketones such as methyl ethyl ketone ("MEK"); and esters such as ethyl acetate. Of these, THF is preferred because of its excellent solubility characteristics.

In a preferred embodiment, the solvent forms an azeotrope with water. In this preferred embodiment, after the blocks are dissolved in excess non-halogenated solvent, the solution may be dried by azeotropic distillation of the solvent, and optionally further concentrated, e.g., via distillation, in the solution to increase the volumetric loading and reaction rate. The blocks then may be end-capped, separately or together, and linked in the same or a different non-halogenated solvent. By distilling off excess solvent to remove water, subsequent reaction with a diisocyanate may proceed without significant interference from competing reactions between the isocyanate moieties and water. Additionally, the solution remains homogeneous and further distillation serves to concentrate the polymer solution, producing higher reaction rates and requiring less reactor capacity. The reaction rates may be improved by conducting the end-capping reaction at elevated temperatures, such as 30°C to 80°C, more preferably 40°C to 60°C. The process may be conducted by a batch or continuous method. For example, the prepolymer and catalyst solution may be continuously fed through a mixer/extruder into which is injected a diisocyanate and a diol at appropriate rates and positions so that urethane linking occurs within the

extruder and energetic thermoplastic elastomer is continuously produced for processing.

In the end-capping and block linking steps, the reaction can be followed with NMR and IR. With NMR, the urethane-forming reaction can be followed through the methylene groups on the polymer adjacent to the terminal hydroxyl groups. With IR, the change from isocyanate to urethane can be directly followed.

Synthesis of polyoxetanes is described in U.S. Patent Nos. 4,483,978 and 4,806,613, the complete disclosures of which are incorporated herein by reference to the extent that these disclosures are compatible with the present invention.

The invention will now be described in greater detail by way of the following examples, which are not to be construed as exhaustive as to the scope of this invention.

As referred to herein, "dry" means that less than 1 wt% water was present.

For the following experiments, poly(azidomethyloxirane) was supplied by 3M Speciality Chemicals of St. Paul, MN (Lot L-12564). Unless otherwise specified, all other materials were obtained from Aldrich of Milwaukee, WI.

#### EXAMPLE 1 (poly(3,3-bis(azidomethyl)oxetane))

A 5 liter jacketed flask equipped with a mechanical stirrer was charged with 600 grams of tribromoneopentylalcohol (AmeriBrom, Inc. of New York), 1200 ml of toluene, and 6 grams of tetrabutylammonium bromide. The mixture was cooled to 12°C and 193 grams of sodium hydroxide was added dropwise as a 40 wt% solution keeping the temperature at 12°C. After 36 hours the reaction mixture was washed with water until the pH was less than 9 to obtain the crude product which was distilled to obtain 3,3-bis(bromomethyl)oxetane at 65% yield.

A 5 liter jacketed flask equipped with a mechanical stirrer was charged with 1450 grams of the 3,3-bis(bromomethyl)oxetane and 1720 ml of toluene. The mixture was stirred and heated to 60°C before 1600 ml of water, 14.7 grams of tetrabutylammonium bromide, and 862 grams of sodium azide were added. After 24 hours, the reaction mixture was cooled to room temperature and washed three times with 2000 ml of water. The toluene and water were removed from the organic layer by distillation to give pure 3,3-bis(azidomethyl)oxetane at 85% yield.

Under an argon atmosphere, 14.94 grams of butane diol was added to a flame dried 5 liter round-bottomed flask charged with 1340 ml of dry methylene chloride. To this mixture, 11.77 grams of borontrifluoride-etherate was added and the reaction was allowed to proceed for one hour at room temperature. The reactor was then cooled to -10°C and 937.78 grams of the 3,3-bis(azidomethyl)oxetane was added. The solution was allowed to come to room temperature and left to react for three days. The reaction was then quenched by the addition of 50 ml of saturated brine solution. The organic phase was separated off and washed with 100 ml of 10 wt% sodium bicarbonate solution before the solvent was removed on a rotovapor. The resulting liquid was then poured into 5 liters of methanol to precipitate the polymer, which was filtered from the solution and dried under vacuum at 30°C.

#### EXAMPLE 2 (poly(3-azidomethyl-3-methyloxetane))

A 5 liter jacketed flask equipped with a mechanical stirrer was charged with 1062 grams of sodium azide, 1972 ml of water, and 2450 grams of 3-bromomethyl-3-methyloxetane (supplied by AmeriBrom, Inc. of New York). This mixture was brought to reflux with vigorous mixing. After 48 hours the mixture was cooled to room temperature. The organic layer was separated off and washed three times with 1000 ml of water before being dried over molecular sieves to yield pure 3-azidomethyl-3-methyloxetane at 85% yield.

Under an argon atmosphere, 14.94 grams of butane diol was added to a flame dried 5 liter round-bottomed flask charged with 1.340 ml of dry methylene chloride. To this mixture, 11.77 grams of borontrifluoride-etherate was added and the reaction was allowed to proceed for one hour at room temperature. The reactor was then  
5 cooled to -10°C and 937.78 grams of the 3-azidomethyl-3-methyloxetane was added. The solution was allowed to come to room temperature and left to react for three days. The reaction was then quenched by the addition of 50 ml of saturated brine solution. The organic phase was separated off and washed with 100 ml of 10 wt% sodium bicarbonate solution before the solvent was removed on a rotovapor. The resulting  
10 liquid was then poured into 5 liters of methanol to precipitate the polymer, which was filtered from the solution and dried under vacuum at 30°C.

EXAMPLE 3 (Random block copolymer of poly(3-azidomethyl-3-methyloxetane) and poly(3,3-bis(azidomethyl)oxetane) in THF)

In a one liter round bottom flask, 65 grams of dry difunctional poly(3-  
15 azidomethyl-3-methyloxetane) with a hydroxyl equivalent weight of 3121 and 35 grams of dry poly(3,3-bis(azidomethyl)oxetane) with a hydroxyl equivalent weight of 3235 were dissolved in 650 grams of dry tetrahydrofuran. The solution was concentrated and dried by evaporation of the tetrahydrofuran under reduced pressure via a rotovapor until 100 grams of the solvent remained. To this solution, 0.1 grams  
20 of diphenyltin dichloride and 5.41 grams of toluene-2,4-diisocyanate were added while stirring with a magnetic stirrer at ambient temperature and pressure. After 24 hours, 1.40 grams of butane-1,4-diol was added causing the solution to become steadily more viscous. After another 24 hours, the solution was poured into methanol in a volume ratio of 1:5. The methanol was decanted off, and the precipitated  
25 polymer was washed three times with fresh methanol (1:5 volume ratio) to give a rubbery granular product with the properties set forth below:  
Mn = 20480

$$M_w/M_n = 5.9$$

$$E^{1.0} \text{ (psi)} = 754$$

$$\epsilon_m (\%) = 204$$

$$\epsilon_f \text{ (failure)} (\%) = 229$$

5      $\sigma_m \text{ (psi)} = 180$

$$\sigma_m \text{ (corrected)} \text{ (psi)} = 558$$

$$\text{Shore A} = 64$$

EXAMPLE 4 (Random block copolymer of poly(3-azidomethyl-3-methyloxetane) and poly(3,3-bis(azidomethyl)oxetane) in THF)

10         In a 100 ml round bottom flask, 6.5 grams of dry difunctional poly(3-azidomethyl-3-methyloxetane) with a hydroxyl equivalent weight of 3040 and 3.5 grams of dry poly(3,3-bis(azidomethyl)oxetane) with a hydroxyl equivalent weight of 3235 were dissolved in 60 ml of dry tetrahydrofuran. The solution was concentrated and dried by evaporation of the tetrahydrofuran under reduced pressure via a  
15         rotovapor until 10 grams of the solvent remained. To this solution, 0.25 ml of dibutyltin dilaurate and 0.561 grams of toluene-2,4-diisocyanate were added while stirring with a magnetic stirrer at ambient temperature and pressure. After 15 minutes, 0.145 grams of butane-1,4-diol was added causing the solution to become steadily more viscous. After another 30 minutes, the solution was poured into  
20         methanol in a volume ratio of 1:5. The methanol was decanted off, and the precipitated polymer was washed three times with fresh methanol (1:5 volume ratio) to give a rubbery granular product with the properties set forth below:

$$M_n = 15404$$

$$M_w = 67277$$

25      $M_w/M_n = 4.37$

EXAMPLE 5 (Random block copolymer of poly(3-azidomethyl-3-methyloxetane) and poly(3,3-bis(azidomethyl)oxetane) in 1,4-dioxane)

azidomethyl-3-methyloxetane) with a hydroxyl equivalent weight of 3040 and 3.5 grams of dry poly(3,3-bis(azidomethyl)oxetane) with a hydroxyl equivalent weight of 3235 were dissolved in 60 ml of dry 1,4-dioxane. The solution was concentrated and dried by evaporation of the 1,4-dioxane under reduced pressure via a rotovapor until  
5 12 grams of the solvent remained. To this solution, 0.3 ml of dibutyltin dilaurate and 0.561 grams of toluene-2,4-diisocyanate were added while stirring with a magnetic stirrer at ambient temperature and pressure. After one hour, 0.145 grams of butane-1,4-diol was added causing the solution to become steadily more viscous. After another two hours, the solution was poured into methanol in a volume ratio of 1:5.  
10 The methanol was decanted off, and the precipitated polymer was washed three times with fresh methanol (1:5 volume ratio) to give a rubbery granular product with the properties set forth below:

Mn = 21230

Mw = 116272

15 Mw/Mn = 5.48

EXAMPLE 6 (Random block copolymer of poly(3-azidomethyl-3-methyloxetane) and poly(3,3-bis(azidomethyl)oxetane) in ethyl acetate)

In a 500 ml round bottom flask, 18 grams of dry difunctional poly(3-azidomethyl-3-methyloxetane) with a hydroxyl equivalent weight of 3356 and 6  
20 grams of dry poly(3,3-bis(azidomethyl)oxetane) with a hydroxyl equivalent weight of 3235 were dissolved in 200 ml of dry ethyl acetate. The solution was concentrated and dried by evaporation of the ethyl acetate under reduced pressure via a rotovapor until 34 grams of the solvent remained. To this solution at 40°C, 0.024 grams of diphenyltin dichloride and 1.26 grams of toluene-2,4-diisocyanate were added while  
25 stirring with a magnetic stirrer. After one hour, 0.33 grams of butane-1,4-diol was added causing the solution to become steadily more viscous. After another 48 hours, the solution was poured into methanol in a volume ratio of 1:5. The methanol was

methanol (1:5 volume ratio) to give a rubbery granular product with the properties set forth below:

$M_n = 13880$

$M_w = 43310$

5  $M_w/M_n = 3.12$

EXAMPLE 7 (Random block copolymer of poly(3-azidomethyl-3-methyloxetane) and poly(3,3-bis(azidomethyl)oxetane) in THF)

In a 100 ml round bottom flask, 6.5 grams of dry difunctional poly(3-azidomethyl-3-methyloxetane) with a hydroxyl equivalent weight of 3040 and 3.5  
10 grams of dry poly(3,3-bis(azidomethyl)oxetane) with a hydroxyl equivalent weight of 3235 were dissolved in 70 ml of dry tetrahydrofuran. The solution was concentrated and dried by evaporation of the tetrahydrofuran under reduced pressure via a rotovapor at 50°C until 5 grams of the solvent remained. To this solution at 50°C, 0.5 ml of dibutyltin dilaurate and 0.561 grams of toluene-2,4-diisocyanate were added  
15 while stirring with a magnetic stirrer. After three minutes, 0.145 grams of butane-1,4-diol was added causing the solution to become steadily more viscous. After another five minutes, the solution was diluted with 20 ml of tetrahydrofuran and 1 ml of methanol. This solution was then precipitate in methanol in a volume ratio of 1:5. The methanol was decanted off, and the precipitated polymer was washed three times  
20 with fresh methanol (1:5 volume ratio) to give a rubbery granular product with the properties set forth below:

$M_n = 17350$

$M_w = 103231$

$M_w/M_n = 5.95$

25 EXAMPLE 8 (Random block copolymer of poly(azidomethyloxirane) and poly(3,3-bis(azidomethyl)oxetane))

In a 25 ml round bottom flask, a urethane oligomer was prepared by dissolving

solution 0.1 ml of dibutyltin dilaurate followed by 1.60 grams of butane-1,4-diol. This reaction mixture was stirred for 1 hour at room temperature.

In a separate 250 ml round bottom flask, 17.94 grams of dry difunctional poly(azidomethyloxirane) with a hydroxyl equivalent weight of 1174 and 6.63 grams of dry poly(3,3-bis(azidomethyl)oxetane) with a hydroxyl equivalent weight of 2390 were dissolved in 100 ml of dry tetrahydrofuran. The solution was concentrated and dried by evaporation of the tetrahydrofuran under reduced pressure via a rotovapor until 20 grams of the solvent remained. To this solution, 75 ml of dibutyltin dilaurate and 3.097 grams of toluene-2,4-diisocyanate were added while stirring with a magnetic stirrer at ambient temperature and pressure. After one hour, the urethane oligomer was added to this solution, causing the solution to become steadily more viscous. After 20 minutes, the solution was too viscous to stir and was diluted with 20 ml of dry tetrahydrofuran and allowed to react for a further 20 minutes before being poured into methanol in a volume ratio of 1:5. The methanol was decanted off, and the precipitated polymer was washed three times with fresh methanol (1:5 volume ratio) to give a rubbery granular product with the properties shown in FIGS. 1 and 2 and set forth below:

Mn = 26240

Mw = 175500

Mw/Mn = 6.69

Molecular weight distribution was determined by gel permeation chromatography using polystyrene standards, with the results shown in FIG. 1. The GPC trace in FIG. 1 demonstrates that the prepolymers were linked to produce a copolymer having a higher molecular weight and dispersivity than the homopolymer blocks. The DMA trace in FIG. 2 shows the melt transition of random block (BAMO-GAP)<sub>n</sub> at 75-80°C with a material modulus reducing only slowly before this point.

EXAMPLES 9-11 (Random block copolymer of poly(3-azidomethyl-3-methyloxetane) and poly(3,3-bis(azidomethyl)oxetane) linked with a urethane oligomer)

In a 500 ml round bottom flask, 45 grams of difunctional poly(3-azidomethyl-3-methyloxetane) with a hydroxyl equivalent weight of 3125 and 15 grams of poly(3,3-bis(azidomethyl)oxetane) with a hydroxyl equivalent weight of 3152 were dissolved in 300 ml of tetrahydrofuran. The solution was concentrated and dried by evaporation of the tetrahydrofuran or a rotovapor until a solution with 90 grams of solvent remained. To this solution 0.6 grams of dibutyltin dichloride and 3.34 grams of toluene-2,4-diisocyanate was added and the mixture allowed to react for 3 hours to end-cap the prepolymer.

For Example 9, 0.22 grams of butanediol was added to one quarter of the isocyanate end-capped prepolymer mixture. The reaction was allowed to continue for 14 hours before it was precipitated with methanol in a volume ratio of 1:5. The methanol was decanted off, and the precipitated polymer was washed three times with fresh methanol (1:5 volume ratio) to give a rubbery granular product.

For Example 10, a urethane oligomer was derived from a mixture of 2 ml of tetrahydrofuran, 0.42 grams of toluene-2,4-diisocyanate, 0.43 grams of butane-1,4-diol, and 0.1 grams of dibutyltin dichloride, which were allowed to react for one hours. The urethane oligomer was then added to one quarter of the isocyanate end-capped prepolymer mixture and allowed to react for 14 hours before it was precipitated with methanol in a volume ratio of 1:5. The methanol was decanted off, and the precipitated polymer was washed three times with fresh methanol (1:5 volume ratio) to give a rubbery granular product.

For Example 11, a urethane oligomer was derived from a mixture of 2 ml of tetrahydrofuran, 0.83 grams of toluene-2,4-diisocyanate, 0.65 grams of butane-1,4-

hours. The urethane oligomer was then added to one quarter of the isocyanate end-capped prepolymer mixture and allowed to react for 14 hours before it was precipitated with methanol in a volume ratio of 1:5. The methanol was decanted off, and the precipitated polymer was washed three times with fresh methanol (1:5 volume ratio) to give a rubbery granular product.

TABLE

	Example 9	Example 10	Example 11
diol:diisocyanate molar ratio	1:0	2:1	3:2
Mn	11440	12340	13240
Mw	134800	142000	122600
Mw/Mn	11.78	11.51	9.26
$E^{1.0}$	520	669	823
$\epsilon_m$ (%)	311	897	536
$\epsilon_f$ (failure) (%)	372	1082	562
$\sigma_m$ (psi)	153	345	300
$\sigma_m$ (corrected) (psi)	678	3575	2381
ShoreA	49	60	65

The foregoing detailed description of the preferred embodiments of the invention has been provided for the purpose of explaining the principles of the invention and its practical application, thereby enabling others skilled in the art to understand the invention for various embodiments and with various modifications as are suited to the particular use contemplated. The foregoing detailed description is not intended to be exhaustive or to limit the invention to the precise embodiments disclosed. Modifications and equivalents will be apparent to practitioners skilled in this art and are encompassed within the spirit and scope of the appended claims.

## WHAT IS CLAIMED IS:

1. A method of preparing a thermoplastic elastomer having A blocks which are crystalline at temperatures below about 75°C and the B blocks which are amorphous at temperatures above about -20°C, the method comprising:
  - 5 (a) dissolving the A blocks and B blocks terminated with respective isocyanate-reactive groups at approximately the stoichiometric ratios that are intended to be present in the thermoplastic elastomer into solution comprising at least one non-halogenated solvent, the A blocks being crystalline at temperatures below about 75°C and derived from monomers comprising at least one member selected from the group  
10 consisting of oxetane derivatives and tetrahydrofuran derivatives, the B blocks being amorphous at temperatures above about -20°C and derived from monomers comprising at least one member selected from the group consisting of oxetane and derivatives thereof, tetrahydrofuran and derivatives thereof, and oxirane and derivatives thereof;
  - 15 (b) drying the dissolved A blocks and B blocks of water by azeotropic distillation of the non-halogenated solvent;
  - (c) end-capping the dried A blocks and the dried B blocks in the non-halogenated solvent by reacting the dried A blocks and the dried B blocks with at  
20 least one diisocyanate in which a first isocyanate moiety thereof is substantially more reactive with the terminal groups of the blocks as a second isocyanate moiety thereof, whereby the more reactive first isocyanate moiety is capable of reacting with the terminal groups of the blocks, leaving the less reactive second isocyanate moiety free and unreacted; and
  - (d) linking the end-capped A blocks and the end-capped B blocks together  
25 in the non-halogenated solvent with at least one linking compound comprising two isocyanate-reactive groups which are sufficiently sterically unhindered to react with the free and unreacted isocyanate moieties of the end-capped polymers.

2. A method as defined in claim 1, wherein said dissolving step (a) comprises separately dissolving the A blocks and the B blocks into respective solutions.

3. A method as defined in claim 2, wherein said end-capping step (c) comprises separately end-capping the A blocks and the B blocks in the respective solutions.

4. A method as defined in claim 1, wherein said steps (a), (b), (c), and (d) are conducted in the absence of any halogenated solvent.

5. A method as defined in claim 1, wherein the non-halogenated solvent comprises one or more organic ethers.

6. A method as defined in claim 5, wherein the organic ether comprises one or more members selected from the group consisting of tetrahydrofuran, ethylene glycol dimethyl ether, and 1,4-dioxane.

7. A method as defined in claim 6, wherein the organic ether comprises tetrahydrofuran.

8. A method as defined in claim 1, wherein the non-halogenated solvent comprises one or more organic esters.

9. A method as defined in claim 8, wherein the organic ester comprises ethyl acetate.

10. A method as defined in claim 1, wherein the non-halogenated solvent comprises one or more organic ketones.

11. A method as defined in claim 10, wherein the organic ketone comprises methyl ethyl ketone.

12. A method as defined in claim 1, wherein the linking compound is derived from at least one diisocyanate and at least one difunctional urethane oligomer comprising two functional groups which are reactive with isocyanate moieties of the diisocyanate.

5 13. A method as defined in claim 1, wherein:

the first isocyanate moiety of the diisocyanate is at least five times more reactive with the terminal groups of each of the blocks as the second isocyanate moiety, whereby the more reactive first isocyanate moiety is capable of reacting with and end capping the terminal groups of the blocks, leaving the less reactive second  
10 isocyanate moiety free and unreacted; and

the linking compound has two isocyanate-reactive hydroxyl groups which are sufficiently sterically unhindered to be reactive with the free and unreacted second isocyanate groups of the end-capped blocks.

14. A method as defined in claim 1, wherein the diisocyanate comprises  
15 toluene diisocyanate.

15. A method as defined in claim 1, wherein the thermoplastic elastomer has a weight average molecular weight of at least 40,000 and a number average molecular weight of at least 10,000.

16. A method as defined in claim 1, wherein the thermoplastic elastomer  
20 has a weight average molecular weight of at least 60,000 and a number average molecular weight of at least 12,000.

17. A method as defined in claim 1, wherein the thermoplastic elastomer has a weight average molecular weight of at least 80,000 and a number average molecular weight of at least 15,000.

18. A method as defined in claim 1, wherein the isocyanate-reactive terminal groups of the A and B blocks are hydroxyl groups.

19. A method of making an energetic composite binder comprising:

- (a) dissolving the A blocks and B blocks terminated with respective  
5 isocyanate-reactive groups at approximately the stoichiometric ratios that are intended to be present in the thermoplastic elastomer into solution comprising at least one non-halogenated solvent, the A blocks being crystalline at temperatures below about 75°C and derived from monomers comprising at least one member selected from the group consisting of oxetane derivatives and tetrahydrofuran derivatives, the B blocks being  
10 amorphous at temperatures above about -20°C and derived from monomers comprising at least one member selected from the group consisting of oxetane and derivatives thereof, tetrahydrofuran and derivatives thereof, and oxirane and derivatives thereof;
- (b) drying the dissolved A blocks and B blocks of water by azeotropic  
15 distillation of the non-halogenated solvent;
- (c) end-capping the dried A blocks and the dried B blocks in the non-halogenated solvent by reacting the dried A blocks and the dried B blocks with at least one diisocyanate in which a first isocyanate moiety thereof is substantially more reactive with the terminal groups of the blocks as a second isocyanate moiety thereof,  
20 whereby the more reactive first isocyanate moiety is capable of reacting with the terminal groups of the blocks, leaving the less reactive second isocyanate moiety free and unreacted;
- (d) linking the end-capped A blocks and the end-capped B blocks together in the non-halogenated solvent with at least one linking compound comprising two  
25 isocyanate-reactive groups which are sufficiently sterically unhindered to react with the free and unreacted isocyanate moieties of the end-capped polymers; and
- (e) blending the thermoplastic elastomer with about 50 wt% to about 95

wt% of at least one solid selected from the group consisting of fuel material particulates and oxidizer particulates.

20. A method as defined in claim 19, wherein said dissolving step (a) comprises separately dissolving the A blocks and the B blocks into respective  
5 solutions.

21. A method as defined in claim 20, wherein said end-capping step (c) comprises separately end-capping the A blocks and the B blocks in the respective solutions.

22. A method as defined in claim 19, wherein said steps (a), (b), (c), and  
10 (d) are conducted in the absence of any halogenated solvent.

23. A method as defined in claim 19, wherein the non-halogenated solvent comprises one or more organic ethers.

24. A method as defined in claim 23, wherein the organic ether comprises one or more members selected from the group consisting of tetrahydrofuran, ethylene  
15 glycol dimethyl ether, and 1,4-dioxane.

25. A method as defined in claim 23, wherein the organic ether comprises tetrahydrofuran.

26. A method as defined in claim 19, wherein the non-halogenated solvent comprises one or more organic esters.

20 27. A method as defined in claim 26, wherein the organic ester comprises ethyl acetate.

28. A method as defined in claim 19, wherein the non-halogenated solvent comprises one or more organic ketones.


29. A method as defined in claim 28, wherein the organic ketone comprises methyl ethyl ketone.

30. A method of making a rocket motor propellant comprising making a binder as defined in claim 19.

5           31. A method of making a gun propellant comprising making a binder as defined in claim 19.


32. A method of making an explosive comprising making a binder as defined in claim 19.

10           33. A method of making a gasifier comprising making a binder as defined in claim 19.

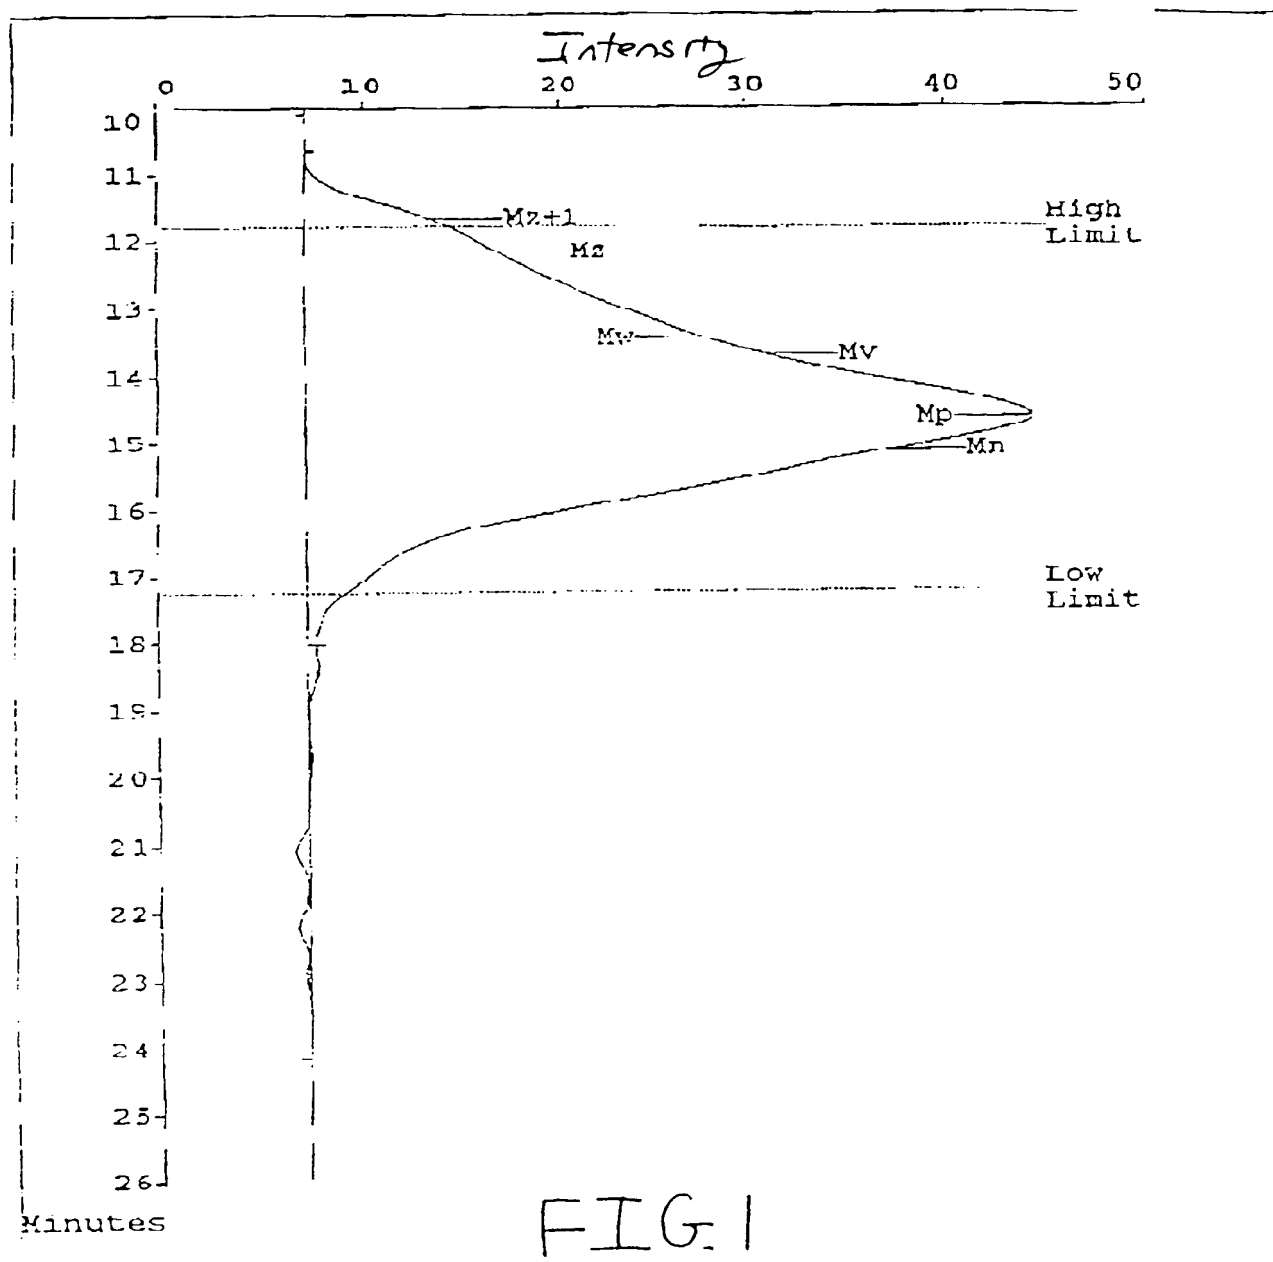

25% BAMO-GAP : 1561/51 4/15/98

G.2

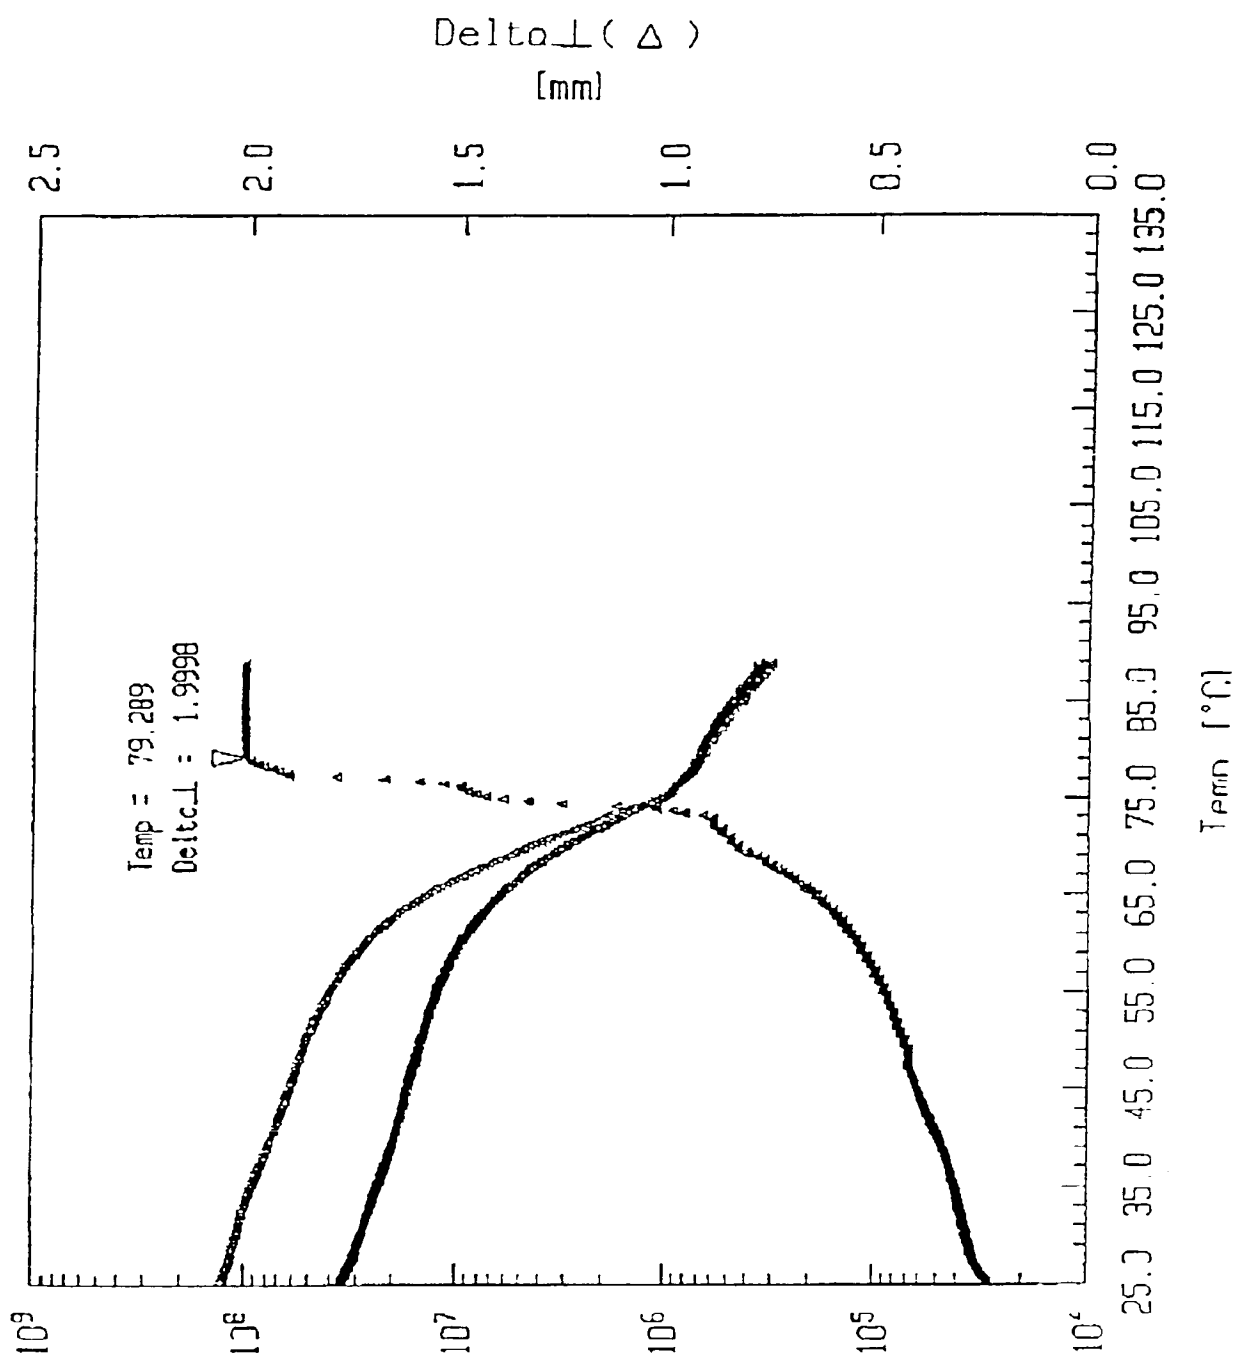

CORRECTED VERSION

(19) World Intellectual Property Organization  
International Bureau



(43) International Publication Date  
15 June 2000 (15.06.2000)

PCT

(10) International Publication Number  
WO 00/34353 A3

(51) International Patent Classification<sup>7</sup>: C08G 18/08, 18:76

(21) International Application Number: PCT/US99/24013

(22) International Filing Date:  
9 November 1999 (09.11.1999)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:  
60/108,455 12 November 1998 (12.11.1998) US

(71) Applicant (for all designated States except US): **COR-DANT TECHNOLOGIES, INC.** [US/US], Suite 1600, 15 West Temple, Salt Lake City, UT 84101-1532 (US).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **SANDERSON, Andrew, J.** [GB/US]; 2711 North, Mountain Road, North Ogden, UT 84414 (US). **EDWARDS, Wayne** [US/US]; 600S 610 West, Tremonton, UT 84337 (US).

(74) Agents: **COLTON, Kendrew, H.** et al.; Pillsbury Madison & Sutro, LLP, 1100 New York Avenue, N.W., Washington, DC 20005 (US).

(81) Designated States (national): AE, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CR, CU, CZ, DE, DK, DM, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZW.

(84) Designated States (regional): ARIPO patent (GH, GM, KE, LS, MW, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).

Published:

— With international search report.

(48) Date of publication of this corrected version:  
30 November 2000

(15) Information about Correction:  
see PCT Gazette No. 48/2000 of 30 November 2000, Section II

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: METHOD FOR THE SYNTHESIS OF ENERGETIC THERMOPLASTIC ELASTOMERS IN NON-HALOGENATED SOLVENTS

(57) Abstract: A method of preparing a thermoplastic elastomer by (a) drying A blocks and B blocks in a non-halogenated solvent, (b) drying the dried A blocks and the dried B blocks in a non-halogenated solvent, (c) end-capping the dried A blocks and the dried B blocks with a diisocyanate having one isocyanate moiety substantially more reactive with the terminal groups of the blocks than the other isocyanate moiety, whereby the more reactive isocyanate moiety is capable of reacting with the terminal groups of the blocks, leaving the less reactive isocyanate moiety free and unreacted. The end-capped A blocks and the end-capped B blocks are linked together with a linking material having two isocyanate moieties to form a thermoplastic elastomer.

The method of the invention includes the steps of: (a) drying A blocks and B blocks in a non-halogenated solvent, (b) drying the dried A blocks and the dried B blocks in a non-halogenated solvent, (c) end-capping the dried A blocks and the dried B blocks with a diisocyanate having one isocyanate moiety substantially more reactive with the terminal groups of the blocks than the other isocyanate moiety, whereby the more reactive isocyanate moiety is capable of reacting with the terminal groups of the blocks, leaving the less reactive isocyanate moiety free and unreacted. The end-capped A blocks and the end-capped B blocks are linked together with a linking material having two isocyanate moieties to form a thermoplastic elastomer.



WO 00/34353 A3

## METHOD FOR THE SYNTHESIS OF ENERGETIC THERMOPLASTIC ELASTOMERS IN NON-HALOGENATED SOLVENTS

### BACKGROUND OF THE INVENTION

5

#### 1. Field of the Invention

This invention relates to a method of synthesizing energetic thermoplastic elastomers which are useful as binders of high energy compositions, such as rocket motor propellants, gun propellants, explosive munitions, gas generants of vehicle supplemental restraint systems, or the like.

10

#### 2. Description of the Related Art

Solid high energy compositions, such as propellants, explosives, gas generants, and the like comprise solid particulates, such as fuel particulates and/or oxidizer particulates, dispersed and immobilized throughout a polymeric binder matrix.

15

Conventional solid composite propellant binders utilize cross-linked elastomers in which prepolymers are cross-linked by chemical curing agents. As outlined in detail in U.S. Patent No. 4,361,526, there are important disadvantages to using cross-linked elastomers as binders. Cross-linked elastomers must be cast within a short period of time after addition of the curative, which time period is known as the "pot life". Disposal of a cast, cross-linked propellant composition is difficult, and usually is accomplished by burning, which poses environmental problems. Furthermore, current state-of-the-art propellant compositions have serious problems that include their use of nonenergetic binders which have lower performance and high end-of-mix viscosities.

20

25

In view of the inherent disadvantages associated with the use of cross-linked elastomeric polymers as binder materials, there has been considerable interest in developing thermoplastic elastomers suitable as binders for solid, high energy

being processible below about 120°C, it being desirable that a thermoplastic elastomeric polymer for use as a binder in a high energy system have a melting temperature of between about 60°C and about 120°C. The melting temperature is desirably at least about 60°C because the propellant composition may be subject to somewhat elevated temperatures during storage and transport, and significant softening of the propellant composition at such elevated temperatures is unwanted. The setting of the melting temperature at not more than about 120°C is determined by the instability, at elevated temperatures, of many components which ordinarily go into high energy compositions, particularly oxidizer particulates and energetic plasticizers.

Many thermoplastic elastomers exhibit high melt viscosities which preclude high solids loading and many show considerable creep and/or shrinkage after processing. Thermoplastic elastomers typically obtain their thermoplastic properties from segments that form glassy domains which may contribute to physical properties adverse to their use as binders. Crosslinkable thermoplastic elastomers are block copolymers with the property of forming physical cross-links at predetermined temperatures. One thermoplastic elastomer, e.g., Kraton, brand TPE, obtains this property by having the glass transition point of one component block above room temperature. At temperatures below 109°C, the glassy blocks of Kraton form glassy domains and thus physically cross-link the amorphous segments. The strength of these elastomers depends upon the degree of phase separation. Thus, it remains desirable to have controlled, but significant, immiscibility between the two types of blocks, which is a function of their chemical structure and molecular weight. On the other hand, as the blocks become more immiscible, the melt viscosity increases, thus having a deleterious effect on the processibility of the material.

Above-mentioned U.S. Patent No. 4,361,526 proposes a thermoplastic elastomeric binder which is a block copolymer of a diene and styrene, the styrene blocks providing a meltable crystal structure and the diene blocks imparting rubbery or elastomeric properties to the copolymer. The '526 patent is hereby incorporated by reference.

processed with a volatile organic solvent. Solvent processing is undesirable inasmuch as the dissolved composition cannot be cast in a conventional manner, e.g., into a rocket motor casing. Furthermore, solvent-based processing presents problems with respect to removal and recovery of solvent.

5           The preparation of energetic thermoplastic elastomers prepared from polyoxetane block copolymers has been proposed in U.S. Patent No. 4,483,978 to Manser and U.S. Patent No. 4,806,613 to Wardle ("the '613 patent"), the complete disclosures of which are incorporated herein by reference to the extent that these disclosures are compatible with this invention. According to the latter, these materials  
10       overcome the disadvantages associated with conventional cross-linked elastomers such as limited pot-life, high end-of-mix viscosity, and scrap disposal problems.

          The thermoplastic materials proposed by the '613 patent involve elastomers having both (A) and (B) blocks, each derived from cyclic ethers, such as oxetane and oxetane derivatives and tetrahydrofuran (THF) and tetrahydrofuran derivatives. The  
15       monomer or combination of monomers of the (A) blocks are selected for providing a crystalline structure at usual ambient temperatures, such as below about 60°C, whereas the monomer or combination of monomers of the (B) blocks are selected to ensure an amorphous structure at usual ambient temperatures, such as above about -20°C. Typical of these materials is the random block copolymer (poly(3-  
20       azidomethyl-3-methyloxetane)-poly(3,3-bis(azidomethyl)oxetane), also known as poly(AMMO/BAMO). These block copolymers have good energetic and mechanical properties. Additionally, the block copolymers can be processed without solvents to serve as binders in high performance, reduced vulnerability explosive, propellant, and gas generant formulations. Advantageously, the block copolymers exhibit good  
25       compatibility with most materials used in such energetic formulations.

          However, the processing techniques disclosed in the '978 and '613 patents

drawbacks have been associated with the use of the halogenated solvents disclosed in the '978 and '613 patents. One drawback is the detrimental impact that halogenated solvents have on the environment. Another drawback of halogenated solvents is attributable to the additional drying steps which the pre-polymer blocks are subject to after their formation. The pre-polymer blocks are typically dried either with chemical drying agent, e.g., desiccants followed by filtration or by the azeotropic removal of water. The azeotropic removal of water is performed with toluene, which is different from the solvent selected for linking the pre-polymer blocks. The performance of an additional drying step and the use of different solvents in the azeotropic drying step and the linking step complicates processing and increases overall processing time. Moreover, toluene does not completely dissolve the end-capped blocks prior to the linking reaction and can interfere with the end-capping and linking catalysts. Yet another drawback associated with halogenated solvents is the relatively low concentrations of pre-polymer blocks and linking compounds that may be loaded in halogenated solvents for processing. The loading of the thermoplastic elastomer ingredients is limited by the solubility of the ingredients in the solvent. For example, the currently used process for forming thermoplastic elastomers by linking energetic polyether diols and diisocyanates typically use approximately 30-40% by weight solutions of the reactants in dichloromethane and 0.1% by weight tin catalyst. Additionally, completion of the reaction in halogenated solvents typically takes several days to a week.

United States Patent No. 4,393,199 to Manser describes the use of a non-halogenated solvent, nitromethane, during cationic polymerization of cyclic ethers. However, it has been found that cyclic ether pre-polymer blocks are not sufficiently soluble in nitromethane to adequately link the pre-polymer blocks once they are formed.

It would therefore be a significant advancement in the art to provide a

drawbacks associated with halogenated solvents while reducing processing time and increasing productivity.

### SUMMARY OF THE INVENTION

It is, therefore, an object of this invention to provide a method for the  
5 synthesis of energetic thermoplastic elastomers that addresses the aforementioned problems associated with the related art and realizes the advancement expressed above.

In accordance with the principles of this invention, these and other objects are attained by a method of synthesizing an energetic thermoplastic elastomer binder that  
10 is in a solid state at room temperature and is derived from A blocks which are crystalline at temperatures below about 60°C and B blocks are amorphous at temperatures above about -20°C. The A blocks may include one or more polyethers derived from monomers of oxetane derivatives and/or tetrahydrofuran derivatives. The B blocks may include one or more polyethers derived from monomers of oxetane  
15 and its derivatives, tetrahydrofuran and its derivatives, and/or oxirane and its derivatives. The polyoxetane blocks A and polyoxirane blocks B may be linked by end-capping the blocks with diisocyanates and linking the end-capped blocks with difunctional linking chemicals in which each of the two terminal functional groups are reactive with an isocyanate moiety of the diisocyanate.

20 In accordance with one embodiment of this method, the A and B blocks are dissolved into solution comprising one or more non-halogenated solvents. The solvent or solvents selected preferably are capable of dissolving more than 25% by weight of the blocks (based on total weight of the solvents and blocks) into solution, more preferably at least 35% by weight into solution, and still more preferably 50%  
25 by weight into solution. The solvents preferably do not interfere with the end capping catalyst, such as dibutyl tin dilaurate. Representative solvents include ethers, esters,

and ketones. Tetrahydrofuran is the preferred solvent because of its excellent solubility. The A and B blocks are mixed together at approximately the stoichiometric ratios that the blocks are intended to be present in the energetic thermoplastic elastomer. The solution is then dried by azeotropic removal of water with excess solvent. The A and B blocks are end-capped in the solvent with one or more diisocyanates. The end-capping may be performed prior or subsequent to the mixing step, but subsequent to the drying step. The diisocyanate preferably has one isocyanate moiety which is more reactive, preferably at least about five times as reactive, with the terminal hydroxyl group of each of the blocks than the other isocyanate moiety, whereby the more reactive isocyanate moiety tends to react with the terminal-hydroxyl groups of the blocks, leaving the less reactive isocyanate moiety free and unreactive. The mixture is reacted with a chain extender having two isocyanate-reactive groups that are sufficiently unhindered to react with the free and unreacted isocyanate groups of the end-capped blocks. In this manner, the end-capped blocks are linked, but not crosslinked, to form a thermoplastic elastomer.

It is still a further object of this invention to provide a method for making propellants, especially rocket propellants and gun propellants, explosives, gas generants, or the like containing an energetic thermoplastic elastomer binder by procedures including the above-discussed method.

These and other objects, features, and advantages of the present invention will become apparent from the accompanying drawings and following detailed description which illustrate and explain, by way of example, the principles of this invention.


#### BRIEF DESCRIPTION OF THE DRAWINGS

The accompanying drawings are provided to facilitate an understanding of the principles of this invention. In such drawings, FIGS. 1 and 2 are graphs showing the properties of a thermoplastic elastomer prepared in accordance with an embodiment

## DETAILED DESCRIPTION OF THE INVENTION

The thermoplastic elastomer  $(AB)_n$  polymers of this invention include A blocks which are crystalline at temperatures below about 60°C, preferably at temperatures below about 75°C, and B blocks which are amorphous at temperatures down to about -20°C. Each of the A and B blocks are polyethers derived from cyclic ethers. Specifically, the A blocks are derived from monomers of oxetane derivatives and/or THF derivatives. The B blocks are derived from monomers of oxetane and its derivatives, THF and its derivatives, and/or monomers of oxirane and its derivatives, preferably energetic oxirane derivatives. The polymers melt at temperatures between about 60°C and about 120°C, and more preferably between about 75°C and about 100°C. The A and B blocks are mutually miscible in the melt. Consequently, the melt viscosity of the block copolymer decreases rapidly as the temperature is raised above the melting point, whereby high energy formulations may include high solids content, e.g., up to about 95% by weight of solid particulates, and can be easily processed. The invention also includes other thermoplastic elastomer block structures, such as ABA tri-block polymers and  $A_nB$  star polymers. Contributing to the miscibility of the A and B blocks is their similar chemical structure.

Oxetane monomer units that may be used in forming the A and B blocks of the present invention have the general formula:

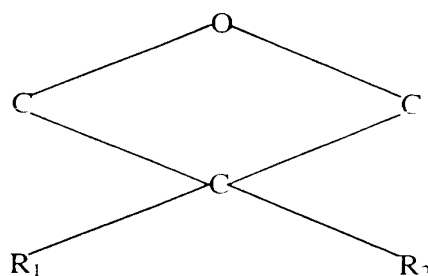


wherein the  $R_1$  and  $R_2$  groups are the same or different and are selected from moieties having the general formula:  $-(CH_2)_nX$ , where  $n$  is 0-10 and  $X$  is selected from the group consisting of -H, -NO<sub>2</sub>, -CN, -Cl, -F, -O-alkyl, -OH, -I, -ONO<sub>2</sub>, -N(NO<sub>2</sub>)-alkyl, -C≡CH, -Br, -CH=CH(H or alkyl), -CO<sub>2</sub>-(H or alkyl), -N(H or alkyl)<sub>2</sub>,  
5 -O-(CH<sub>2</sub>)<sub>1-5</sub>-O-(CH<sub>2</sub>)<sub>0-8</sub>-CH<sub>3</sub>, and N<sub>3</sub>.

Examples of oxetane derivatives that may be used in forming the A blocks in accordance with this invention are generally symmetrically-substituted oxetanes including, but are not limited to, the following: BEMO (3,3-bis(ethoxymethyl)oxetane), BCMO (3,3-bis(chloromethyl)oxetane), BMMO (3,3-bis(methoxymethyl)oxetane), BFMO (3,3-bis(fluoromethyl)oxetane), BAOMO (3,3-bis(acetoxymethyl)oxetane), BHMO (3,3-bis(hydroxymethyl)oxetane), BMEMO (3,3-bis(methoxyethoxymethyl)oxetane), BIMO (3,3-bis(iodomethyl)oxetane), BNMO (3,3-bis(nitratomethyl)oxetane), BMNAMO (3,3-bis(methylnitraminomethyl)oxetane), and BAMO (3,3-bis(azidomethyl)oxetane).


15 Examples of oxetanes derivatives that may be used in forming the B blocks in accordance with this invention are generally unsymmetrically-substituted oxetanes including, but are not limited to, the following: HMMO (3-hydroxymethyl-3-methyloxetane), OMMO (3-octoxymethyl-3-methyloxetane), CMMO (3-chloromethyl-3-methyloxetane), AMMO (3-azidomethyl-3-methyloxetane), IMMO (3-iodomethyl-3-methyloxetane), PMMO (3-propynomethylmethyloxetane), NMMO (3-nitratomethyl-3-methyloxetane), and MNAMMO (3-methylnitraminomethyl-3-methyloxetane).  
20

Tetrahydrofuran monomer units that may be used in forming the blocks of the present invention have the general formula:

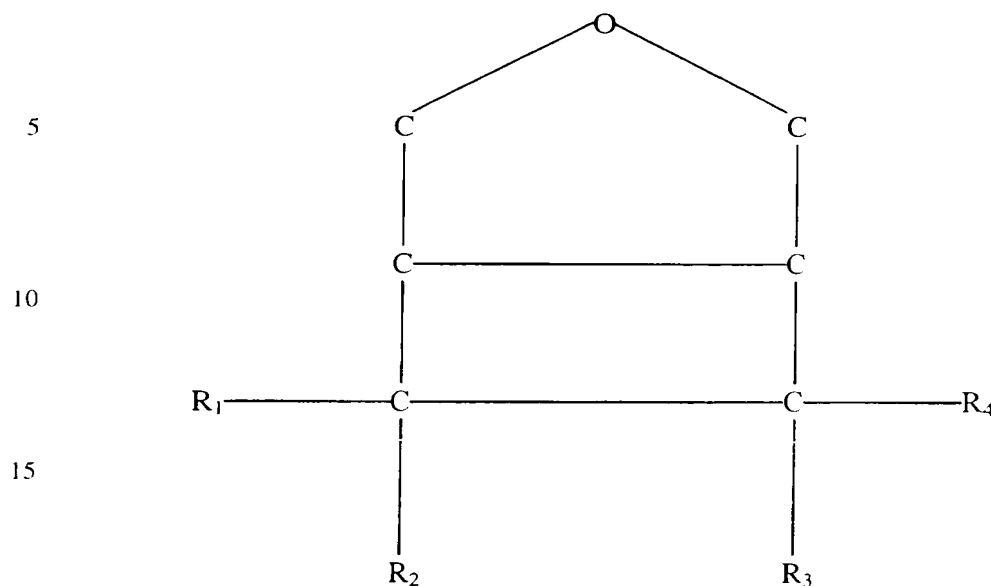

20 wherein the  $R_1$ - $R_4$  groups are the same or different and are selected from moieties set forth above in connection with the description of suitable oxetane derivatives.

Oxirane monomer units used in forming the B blocks of the present invention have the general formula:

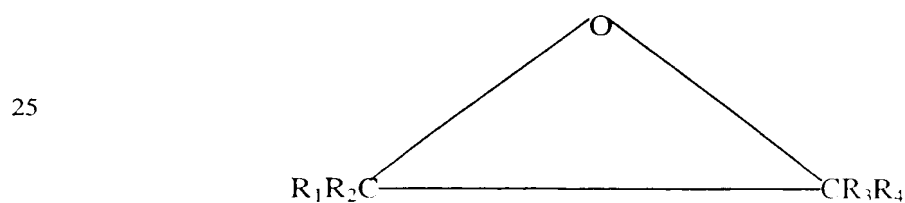

wherein  $R_1$  and  $R_3$  are independently selected from hydrogen and methyl, and  $R_2$  and  $R_4$  are independently selected from hydrogen, alkyl containing from 1 to 10 carbon atoms, chloroalkyl and bromoalkyl containing 1 to 2 carbon atoms, and nitratoalkyl, nitratoalkoxyalkyl, nitroalkyl, nitroalkoxyalkyl, azidoalkyl, azidoalkoxyalkyl,

30

fluoronitroalkyl, and fluoronitroalkoxyalkyl containing 1 to 5 carbon atoms provided that at least one of  $R_1$  to  $R_4$  is not hydrogen.

Examples of energetic oxiranes that may be used in forming the B blocks in accordance with this invention include, but are not limited to glycidyl azide polymers (C<sub>3</sub>H<sub>5</sub>N<sub>3</sub>O) (GAP), especially difunctional GAP, and poly(glycidyl nitrate) (C<sub>3</sub>H<sub>5</sub>NO<sub>4</sub>) (PGN). These polymers have a glass transition temperature below about -20°C and are amorphous at temperatures above -20°C.

Forming thermoplastic elastomers in accordance with the invention involves (1) formation of at least one polyether-derived homopolymer, copolymer, or terpolymer serving as the A blocks and crystalline in nature with a relatively elevated melting point, i.e., between about 60°C and about 120°C, preferably near 80°C and (2) formation of at least one polyether-derived homopolymer, copolymer, or terpolymer serving as the B blocks and amorphous in structure with a glass transition temperature ( $T_g$ ) below about -20°C.

The selection of the A block may be made based on the properties desired for the intended application of the thermoplastic elastomer. Examples of preferred crystalline A blocks include blocks possessing high energy density, such as those formed from BAMO and/or BMNAMO monomers. Melting temperature and ether oxygen content are additional factors that may be taken into consideration in selecting the monomers.

The properties of the block polymer depends upon the molecular weights of the individual blocks and the total molecular weights. Typically the A blocks have number average molecular weights ranging from about 3000 to about 8000, whereas the B blocks have number average molecular weights ranging from about 3000 to about 15,000. The weight ratio of A blocks to B blocks is preferably between about

15:85 to about 40:60. The preferred sizes of the A and B blocks for any particular binder application may be empirically determined.

The thermoplastic elastomers of this invention preferably are in a solid state at room temperature, have a weight average molecular weight of at least 40,000, more preferably at least 60,000, still more preferably at least 80,000, and a number average molecular weight of at least 10,000, more preferably at least 12,000, still more preferably at least 15,000.

Thermoplastic elastomers produced in accordance with the present invention may be admixed with other components of a high energy formulation, such as a propellant formulation. The binder system, in addition to the thermoplastic elastomers, may optionally contain one or more plasticizers for improving the resistance of the thermoplastic elastomer to hardening at low temperatures, which may be included at a plasticizer-to-thermoplastic elastomer weight ratio of up to about 1:1. Suitable high energy plasticizers include glycidyl azide polymer (GAP), nitroglycerine, butanetriol trinitrate (BTTN), alkyl nitratomethyl nitramines, trimethylolethane trinitrate (TMETN), diethylene glycol dinitrate, triethylene glycol dinitrate (TEGDN), bis(dinitropropylacetal/-bis(dinitropropyl)formal (BDNPA/F), and mixtures thereof. Inert plasticizers can also be used. Representative inert plasticizers include, by way of example, dioctyladipate (DOA), isodecylperlargonate (IDP), dioctylphthalate (DOP), dioctylmaleate (DOM), dibutylphthalate (DBP), oleyl nitrile, triacetin, and combinations thereof. The binder system may also contain a minor amount of a wetting agent or lubricant that enables higher solids loading.

The solids content of the high energy composition generally ranges from about 50 wt% to about 95 wt%, higher solids loading generally being preferred so long as such loading is consistent with structural integrity. The solids include fuel material particles and powders (collectively referred to herein as particulates), such as particulate aluminum, and/or oxidizer particulates. Representative fuels include

aluminum, magnesium, boron, and beryllium. Representative oxidizers and co-oxidizers include ammonium perchlorate; hydroxylammonium nitrate (HAN); ammonium dinitramide (ADN); hydrazinium nitroformate; ammonium nitrate; nitramines such as cyclotetramethylene tetranitramine (HMX) and cyclotrimethylene trinitramine (RDX), 2,4,6,8,10,12-hexanitro-2,4,6,8,10,12-  
5 hexaazatetracyclo[5.5.0.0<sup>5,9</sup>.0<sup>3,11</sup>]-dodecane or 2,4,6,8,10,12-hexanitrohexaazaisowurtzitane (CL-20 or HNIW), and/or 4,10-dinitro-2,6,8,12-tetraoxa-4,10-diazatetracyclo[5.5.0.0<sup>5,9</sup>.0<sup>3,11</sup>]dodecane (TEX), and any combination thereof. In addition, the high energy composition may include minor amounts of  
10 additional components known in the art, such as bonding agents, burn rate modifiers, ballistic modifiers (e.g., lead), etc.

The thermoplastic elastomer may be mixed with the solids and other components of high energy formulation at temperatures above its melting temperature. Blending may be done in conventional mixing apparatus. Because of  
15 the low viscosities of the molten polymer, no solvents are required for blending or other processing, such as extrusion.

An important advantage of having a binder which is meltable is that the elastomer from an outdated device containing can be melted down and reused. At the time of such remelting, the binder might be reformulated, e.g., by addition of  
20 additional fuel or oxidizer particulates. Accordingly, the thermoplastic elastomer provides for its eventual recycle, as opposed to the burning required for disposal of cross-linked compositions. Because the "pot life" of the thermoplastic propellant exceeds that which would reasonably be required of a propellant or explosive formulation, if any problems develop during casting, the process can be delayed as  
25 long as is reasonably necessary, merely by maintaining the formulation in a molten state.

The oxetane homopolymer blocks may be formed according to the cationic polymerization technique taught by Manser in U.S. Patent No. 4,393,199, the complete disclosure of which is incorporated herein by reference. The oxirane homopolymer blocks may be formed according to the technique taught in U.S. Patent  
5 No. 5,120,827, the complete disclosure of which is incorporated herein by reference. The technique employs an adduct of a substance such as a diol, e.g., 1,4-butane diol (BDO), and a catalyst for cationic polymerization, e.g.,  $\text{BF}_3$ -etherate. This adduct forms with the oxetane monomer an initiating species which undergoes chain extension until n moles of monomer have been incorporated in the molecule, n being  
10 the ratio of monomers to adduct present. By adjusting the ratio of monomers to adduct present, the average molecular weight of the polymer which forms may be adjusted. If two or more monomers are present, incorporation of the monomers will be generally random but may depend upon the relative reactivities of the monomers in the polymerization reaction.

15 Another suitable catalyst system includes co-catalytically effective quantities of one or more triethoxonium salts and one or more alcohols, as disclosed in U.S. Application No. 08/233,219, the complete disclosure of which is incorporated herein by reference to the extent that the disclosure is compatible with this invention. Examples of triethoxonium salts include triethoxonium hexafluorophosphate,  
20 triethoxonium hexafluoroantimonate, and triethoxonium tetrafluoroborate.

It is understood that although the isocyanate-reactive terminal functional groups of the blocks are referred to herein as being hydroxyl groups, the isocyanate-reactive functional groups may also be amines, amides, and/or carboxyl groups.

The crystalline polyoxetane A blocks and amorphous B blocks, i.e., the  
25 respective prepolymers, are each end-capped together or separately with one or more diisocyanates. The end-capped A and B blocks are mixed together and joined by a linking compound which has a pair of isocyanate-reactive functionalities that are

sufficiently unhindered to allow them to react with the free isocyanate moieties of the end-capped copolymers and thereby join the blocks together.

Oxetane, THF, and oxirane polymer blocks normally have terminal isocyanate-reactive (e.g., hydroxyl) functions which are end-capped with the diisocyanates in accordance with the invention. Preferably, a first one the isocyanate moieties of the end-capping compound is substantially more reactive with the terminal-hydroxyl moieties of the polymer blocks than the other (e.g., second) isocyanate moiety. One of the problems with linking these types of polymer blocks is that substituted oxetane-derived hydroxyl end groups units have neopentyl structures, whereby the terminal primary hydroxyl moieties are substantially hindered and therefore less reactive. The blocks derived from the oxirane derivatives are secondary alcohols, making their hydroxyl groups less reactive than the primary hydroxyl group of the oxetane-derived A-block. The diisocyanate preferably is selected so that one of the isocyanate groups is capable of reacting with a hydroxyl-group of the polymer blocks while the other isocyanate moiety remains free and unreacted. Diisocyanates are preferably used because isocyanates of higher functionality would result in undesirable levels of cross-linking. The different reactivities of the isocyanate moieties is desirable to ensure that substantial chain extension through linking of like blocks does not occur. Thus, for purposes of this invention, one isocyanate moiety of the diisocyanate should preferably be approximately five times more reactive with terminal hydroxyl groups of oxetane and oxirane blocks than the other group. Preferably one isocyanate moiety is at least about ten times more reactive than the other.

One diisocyanate which is especially useful for purposes of the invention is 2,4-toluene diisocyanate (TDI) in which the isocyanate moiety in the 4-position is substantially more reactive with hindered terminal hydroxyl moieties than the isocyanate moiety in the 2-position. Isophorone diisocyanate (IPDI) is suitable for

not worked well include diphenylmethylene diisocyanate (MDI) and hexamethylene diisocyanate (HDI).

In the end-capping reaction, the diisocyanate is used at an approximately stoichiometric molar amount relative to terminal hydroxyl groups on the polymer chain. Thus, if the polymer chain has a pair of terminal hydroxyl groups, approximately two molar equivalents, e.g., 1.75-2.2 molar equivalents of diisocyanate are used. In the ideal reaction, all of the more reactive isocyanate moieties would react with terminal hydroxyl groups, leaving all of the less reactive isocyanate moieties free. Practically, not all of the diisocyanate reacts in this manner, and some chain extension does occur. Thus, the end-capping reaction may be maximized for particular polymer chains by some adjustment in the relative molar ratios of polymer block and diisocyanate.

In one variant embodiment, the A blocks and B blocks are reacted separately with the diisocyanate, so that there is no competition of the blocks for diisocyanate molecules and each separate end-capping reaction may be carried to substantial completion. The diisocyanate may react more rapidly with one block than the other, but this difference can be compensated for by a longer reaction time with the slower reacting block. The reactivity of the terminal hydroxyl groups varies according to steric factors and also according to side-chain moieties. Energetic oxetanes, for example, generally have side-chain moieties that are electron-withdrawing, making their terminal hydroxyl groups less reactive. Once end-capped with diisocyanate, the reactivities of the polymers for linking purposes is essentially dependent only upon the reactivity of the free isocyanate, not on the chemical makeup of the polymer chain itself. Thus end-capped (A) blocks are substantially as reactive as end-capped (B) blocks.

The end-capping reaction is promoted by a suitable urethane catalyst. A number of types of catalysts include organotin compounds with at least one and

preferably two labile groups, such as chloride or acetate, bound directly to the tin. Suitable tin catalyst include diphenyl tin dichloride, dibutyl tin dichloride, dibutyl tin dilaurate, dibutyl tin diacetate. Tertiary amine catalysts may also be used.

The linking compound is one which has two functional groups which are  
5 sufficiently unhindered to react with the free isocyanate moieties on the end-capped blocks so as to link A blocks to B blocks, A blocks to A blocks, and B blocks to B blocks in a urethane reaction. Preferred functional groups are hydroxyl groups, although amine, amide, and carboxyl groups, and mixtures thereof also react in a urethane reaction. Primary functional groups are preferred. The linking compound  
10 may be a short, straight carbon chain having terminal hydroxyl groups, e.g., 1,4-butanediol, 1,3-propanediol, ethylene glycol, and 1,6-hexanediol. The linking compound should also be miscible with and rapidly dissolve in the non-halogenated solvent so as to ensure chain extension without unwanted amounts of cross-linking.

Alternatively, the linking compound may be an oligomer, especially a  
15 urethane oligomer, having two functional groups which are sufficiently unhindered to react with the free isocyanate moieties on the end-capped blocks so as to link A blocks to B blocks, A blocks to A blocks, and B blocks to B blocks via a urethane reaction. Preferred functional groups of the oligomer are hydroxyl groups, although amine, amide, and carboxyl groups, and mixtures thereof also react in a urethane  
20 reaction. Primary functional groups are preferred.

An oligomeric glycol containing urethane moieties is preferably used to react the free isocyanate moieties on the end-capped blocks. The oligomeric glycol may be prepared from a mixture of one or more diisocyanates and an excess amount of one or more diols. The diisocyanate(s) and diol(s) selected and the ratio of these reagents  
25 may be varied to tailor the properties of the thermoplastic elastomer. The diol-to-diisocyanate molar ratio is preferably selected to be between 5:1 to 5:4, more preferably about 2:1, to maintain a suitable processing temperature. A chain extender

linking of the isocyanate-capped prepolymers, and improve the thermomechanical properties of the final thermoplastic elastomer. A suitable urethane reaction catalyst promotes the reaction between the diisocyanate(s) and diol(s) to form oligomers. The catalysts discussed above in connection with the linking of the A and B blocks are suitable for this purpose. Representative diols that may be selected for preparing the difunctional oligomer include, by way of example, unbranched aliphatic diols having 2 to 7 carbon atoms, such as ethylene glycol, propylene glycol, butylene glycol; and cycloaliphatic diols such as 1,4-cyclohexanedimethanol, and any combination thereof. Representative diisocyanates for preparing the difunctional oligomer include, by way of example, aliphatic diisocyanates such as hexane diisocyanate, and aryl diisocyanates such as methylene-bis(4-phenyl isocyanate), phenylene diisocyanate, toluene diisocyanate, and xylylene diisocyanate, and any combination thereof. Preferably, the difunctional oligomer has a number average molecular weight  $M_n$  of from 350 to 900.

It is to be appreciated that a wide variety of difunctional compounds maybe used to link the end-capped blocks.

As in the end-capping reaction, some solvent is preferably used, as is a catalyst, such as described above. Conveniently, the reaction mixtures of the A blocks and B blocks may be mixed together without prior separation of the blocks from their respective end-capping reaction mixtures. The linking compound can be added directly to this mixture of A and B blocks. The catalyst is thereby already present when the linking compound is added.

The linking compound is added in an amount such that the total number of linking-compound functional groups approximately equals the total number of free isocyanate groups of the end-capped polymer blocks. Thus, to provide an  $(AB)_n$  polymer with multiple blocks in each chain, the linking compound to polymer block

molar ratio is in the range of 0.9-1.1, e.g., 1.0. Accordingly, optimal molar ratios of blocks and linking chemicals may have to be empirically determined.

The end-capping reaction and linking reaction are carried out in a suitable non-halogenated solvent, e.g., one which dissolves the polymer and does not react with the free isocyanate moieties. Although insubstantial amounts of halogenated solvent may be present, the solution is preferably completely free of any halogenated solvent. The non-halogenated solvent should not react in the urethane reaction and forms an azeotrope with water. Suitable dry solvents include cyclic ethers such as tetrahydrofuran (THF) and 1,4-dioxane; non-cyclic ethers such as ethylene glycol dimethyl ether; ketones such as methyl ethyl ketone ("MEK"); and esters such as ethyl acetate. Of these, THF is preferred because of its excellent solubility characteristics.

In a preferred embodiment, the solvent forms an azeotrope with water. In this preferred embodiment, after the blocks are dissolved in excess non-halogenated solvent, the solution may be dried by azeotropic distillation of the solvent, and optionally further concentrated, e.g., via distillation, in the solution to increase the volumetric loading and reaction rate. The blocks then may be end-capped, separately or together, and linked in the same or a different non-halogenated solvent. By distilling off excess solvent to remove water, subsequent reaction with a diisocyanate may proceed without significant interference from competing reactions between the isocyanate moieties and water. Additionally, the solution remains homogeneous and further distillation serves to concentrate the polymer solution, producing higher reaction rates and requiring less reactor capacity. The reaction rates may be improved by conducting the end-capping reaction at elevated temperatures, such as 30°C to 80°C, more preferably 40°C to 60°C. The process may be conducted by a batch or continuous method. For example, the prepolymer and catalyst solution may be continuously fed through a mixer/extruder into which is injected a diisocyanate and a diol at appropriate rates and positions so that urethane linking occurs within the

extruder and energetic thermoplastic elastomer is continuously produced for processing.

In the end-capping and block linking steps, the reaction can be followed with NMR and IR. With NMR, the urethane-forming reaction can be followed through the methylene groups on the polymer adjacent to the terminal hydroxyl groups. With IR, the change from isocyanate to urethane can be directly followed.

Synthesis of polyoxetanes is described in U.S. Patent Nos. 4,483,978 and 4,806,613, the complete disclosures of which are incorporated herein by reference to the extent that these disclosures are compatible with the present invention.

The invention will now be described in greater detail by way of the following examples, which are not to be construed as exhaustive as to the scope of this invention.

As referred to herein, "dry" means that less than 1 wt% water was present.

For the following experiments, poly(azidomethyloxirane) was supplied by 3M Speciality Chemicals of St. Paul, MN (Lot L-12564). Unless otherwise specified, all other materials were obtained from Aldrich of Milwaukee, WI.

#### EXAMPLE 1 (poly(3,3-bis(azidomethyl)oxetane))

A 5 liter jacketed flask equipped with a mechanical stirrer was charged with 600 grams of tribromoneopentylalcohol (AmeriBrom, Inc. of New York), 1200 ml of toluene, and 6 grams of tetrabutylammonium bromide. The mixture was cooled to 12°C and 193 grams of sodium hydroxide was added dropwise as a 40 wt% solution keeping the temperature at 12°C. After 36 hours the reaction mixture was washed with water until the pH was less than 9 to obtain the crude product which was distilled to obtain 3,3-bis(bromomethyl)oxetane at 65% yield.

A 5 liter jacketed flask equipped with a mechanical stirrer was charged with 1450 grams of the 3,3-bis(bromomethyl)oxetane and 1720 ml of toluene. The mixture was stirred and heated to 60°C before 1600 ml of water, 14.7 grams of tetrabutylammonium bromide, and 862 grams of sodium azide were added. After 24 hours, the reaction mixture was cooled to room temperature and washed three times with 2000 ml of water. The toluene and water were removed from the organic layer by distillation to give pure 3,3-bis(azidomethyl)oxetane at 85% yield.

Under an argon atmosphere, 14.94 grams of butane diol was added to a flame dried 5 liter round-bottomed flask charged with 1340 ml of dry methylene chloride. To this mixture, 11.77 grams of borontrifluoride-etherate was added and the reaction was allowed to proceed for one hour at room temperature. The reactor was then cooled to -10°C and 937.78 grams of the 3,3-bis(azidomethyl)oxetane was added. The solution was allowed to come to room temperature and left to react for three days. The reaction was then quenched by the addition of 50 ml of saturated brine solution. The organic phase was separated off and washed with 100 ml of 10 wt% sodium bicarbonate solution before the solvent was removed on a rotovapor. The resulting liquid was then poured into 5 liters of methanol to precipitate the polymer, which was filtered from the solution and dried under vacuum at 30°C.

#### EXAMPLE 2 (poly(3-azidomethyl-3-methyloxetane))

A 5 liter jacketed flask equipped with a mechanical stirrer was charged with 1062 grams of sodium azide, 1972 ml of water, and 2450 grams of 3-bromomethyl-3-methyloxetane (supplied by AmeriBrom, Inc. of New York). This mixture was brought to reflux with vigorous mixing. After 48 hours the mixture was cooled to room temperature. The organic layer was separated off and washed three times with 1000 ml of water before being dried over molecular sieves to yield pure 3-azidomethyl-3-methyloxetane at 85% yield.

Under an argon atmosphere, 14.94 grams of butane diol was added to a flame dried 5 liter round-bottomed flask charged with 1.340 ml of dry methylene chloride. To this mixture, 11.77 grams of borontrifluoride-etherate was added and the reaction was allowed to proceed for one hour at room temperature. The reactor was then  
5 cooled to -10°C and 937.78 grams of the 3-azidomethyl-3-methyloxetane was added. The solution was allowed to come to room temperature and left to react for three days. The reaction was then quenched by the addition of 50 ml of saturated brine solution. The organic phase was separated off and washed with 100 ml of 10 wt% sodium bicarbonate solution before the solvent was removed on a rotovapor. The resulting  
10 liquid was then poured into 5 liters of methanol to precipitate the polymer, which was filtered from the solution and dried under vacuum at 30°C.

EXAMPLE 3 (Random block copolymer of poly(3-azidomethyl-3-methyloxetane) and poly(3,3-bis(azidomethyl)oxetane) in THF)

In a one liter round bottom flask, 65 grams of dry difunctional poly(3-  
15 azidomethyl-3-methyloxetane) with a hydroxyl equivalent weight of 3121 and 35 grams of dry poly(3,3-bis(azidomethyl)oxetane) with a hydroxyl equivalent weight of 3235 were dissolved in 650 grams of dry tetrahydrofuran. The solution was concentrated and dried by evaporation of the tetrahydrofuran under reduced pressure via a rotovapor until 100 grams of the solvent remained. To this solution, 0.1 grams  
20 of diphenyltin dichloride and 5.41 grams of toluene-2,4-diisocyanate were added while stirring with a magnetic stirrer at ambient temperature and pressure. After 24 hours, 1.40 grams of butane-1,4-diol was added causing the solution to become steadily more viscous. After another 24 hours, the solution was poured into methanol in a volume ratio of 1:5. The methanol was decanted off, and the precipitated  
25 polymer was washed three times with fresh methanol (1:5 volume ratio) to give a rubbery granular product with the properties set forth below:  
Mn = 20480

$$M_w/M_n = 5.9$$

$$E^{1.0} (\text{psi}) = 754$$

$$\epsilon_m (\%) = 204$$

$$\epsilon_f (\text{failure}) (\%) = 229$$

5  $\sigma_m (\text{psi}) = 180$

$$\sigma_m (\text{corrected}) (\text{psi}) = 558$$

$$\text{Shore A} = 64$$

EXAMPLE 4 (Random block copolymer of poly(3-azidomethyl-3-methyloxetane) and poly(3,3-bis(azidomethyl)oxetane) in THF)

10 In a 100 ml round bottom flask, 6.5 grams of dry difunctional poly(3-azidomethyl-3-methyloxetane) with a hydroxyl equivalent weight of 3040 and 3.5 grams of dry poly(3,3-bis(azidomethyl)oxetane) with a hydroxyl equivalent weight of 3235 were dissolved in 60 ml of dry tetrahydrofuran. The solution was concentrated and dried by evaporation of the tetrahydrofuran under reduced pressure via a  
15 rotovapor until 10 grams of the solvent remained. To this solution, 0.25 ml of dibutyltin dilaurate and 0.561 grams of toluene-2,4-diisocyanate were added while stirring with a magnetic stirrer at ambient temperature and pressure. After 15 minutes, 0.145 grams of butane-1,4-diol was added causing the solution to become steadily more viscous. After another 30 minutes, the solution was poured into  
20 methanol in a volume ratio of 1:5. The methanol was decanted off, and the precipitated polymer was washed three times with fresh methanol (1:5 volume ratio) to give a rubbery granular product with the properties set forth below:

$$M_n = 15404$$

$$M_w = 67277$$

25  $M_w/M_n = 4.37$

EXAMPLE 5 (Random block copolymer of poly(3-azidomethyl-3-methyloxetane) and poly(3,3-bis(azidomethyl)oxetane) in 1,4-dioxane)

azidomethyl-3-methyloxetane) with a hydroxyl equivalent weight of 3040 and 3.5 grams of dry poly(3,3-bis(azidomethyl)oxetane) with a hydroxyl equivalent weight of 3235 were dissolved in 60 ml of dry 1,4-dioxane. The solution was concentrated and dried by evaporation of the 1,4-dioxane under reduced pressure via a rotovapor until  
5 12 grams of the solvent remained. To this solution, 0.3 ml of dibutyltin dilaurate and 0.561 grams of toluene-2,4-diisocyanate were added while stirring with a magnetic stirrer at ambient temperature and pressure. After one hour, 0.145 grams of butane-1,4-diol was added causing the solution to become steadily more viscous. After another two hours, the solution was poured into methanol in a volume ratio of 1:5.  
10 The methanol was decanted off, and the precipitated polymer was washed three times with fresh methanol (1:5 volume ratio) to give a rubbery granular product with the properties set forth below:  
Mn = 21230  
Mw = 116272  
15 Mw/Mn = 5.48

EXAMPLE 6 (Random block copolymer of poly(3-azidomethyl-3-methyloxetane) and poly(3,3-bis(azidomethyl)oxetane) in ethyl acetate)

In a 500 ml round bottom flask, 18 grams of dry difunctional poly(3-azidomethyl-3-methyloxetane) with a hydroxyl equivalent weight of 3356 and 6  
20 grams of dry poly(3,3-bis(azidomethyl)oxetane) with a hydroxyl equivalent weight of 3235 were dissolved in 200 ml of dry ethyl acetate. The solution was concentrated and dried by evaporation of the ethyl acetate under reduced pressure via a rotovapor until 34 grams of the solvent remained. To this solution at 40°C, 0.024 grams of diphenyltin dichloride and 1.26 grams of toluene-2,4-diisocyanate were added while  
25 stirring with a magnetic stirrer. After one hour, 0.33 grams of butane-1,4-diol was added causing the solution to become steadily more viscous. After another 48 hours, the solution was poured into methanol in a volume ratio of 1:5. The methanol was decanted off, and the precipitated polymer was washed three times with fresh

methanol (1:5 volume ratio) to give a rubbery granular product with the properties set forth below:

$M_n = 13880$

$M_w = 43310$

5  $M_w/M_n = 3.12$

EXAMPLE 7 (Random block copolymer of poly(3-azidomethyl-3-methyloxetane) and poly(3,3-bis(azidomethyl)oxetane) in THF)

In a 100 ml round bottom flask, 6.5 grams of dry difunctional poly(3-azidomethyl-3-methyloxetane) with a hydroxyl equivalent weight of 3040 and 3.5  
10 grams of dry poly(3,3 bis(azidomethyl)oxetane) with a hydroxyl equivalent weight of 3235 were dissolved in 70 ml of dry tetrahydrofuran. The solution was concentrated and dried by evaporation of the tetrahydrofuran under reduced pressure via a rotovapor at 50°C until 5 grams of the solvent remained. To this solution at 50°C, 0.5 ml of dibutyltin dilaurate and 0.561 grams of toluene-2,4-diisocyanate were added  
15 while stirring with a magnetic stirrer. After three minutes, 0.145 grams of butane-1,4-diol was added causing the solution to become steadily more viscous. After another five minutes, the solution was diluted with 20 ml of tetrahydrofuran and 1 ml of methanol. This solution was then precipitate in methanol in a volume ratio of 1:5. The methanol was decanted off, and the precipitated polymer was washed three times  
20 with fresh methanol (1:5 volume ratio) to give a rubbery granular product with the properties set forth below:

$M_n = 17350$

$M_w = 103231$

$M_w/M_n = 5.95$

25 EXAMPLE 8 (Random block copolymer of poly(azidomethyloxirane) and poly(3,3-bis(azidomethyl)oxetane))

In a 25 ml round bottom flask, a urethane oligomer was prepared by dissolving

solution 0.1 ml of dibutyltin dilaurate followed by 1.60 grams of butane-1,4-diol. This reaction mixture was stirred for 1 hour at room temperature.

In a separate 250 ml round bottom flask, 17.94 grams of dry difunctional poly(azidomethyloxirane) with a hydroxyl equivalent weight of 1174 and 6.63 grams of dry poly(3,3-bis(azidomethyl)oxetane) with a hydroxyl equivalent weight of 2390 were dissolved in 100 ml of dry tetrahydrofuran. The solution was concentrated and dried by evaporation of the tetrahydrofuran under reduced pressure via a rotovapor until 20 grams of the solvent remained. To this solution, 75 ml of dibutyltin dilaurate and 3.097 grams of toluene-2,4-diisocyanate were added while stirring with a magnetic stirrer at ambient temperature and pressure. After one hour, the urethane oligomer was added to this solution, causing the solution to become steadily more viscous. After 20 minutes, the solution was too viscous to stir and was diluted with 20 ml of dry tetrahydrofuran and allowed to react for a further 20 minutes before being poured into methanol in a volume ratio of 1:5. The methanol was decanted off, and the precipitated polymer was washed three times with fresh methanol (1:5 volume ratio) to give a rubbery granular product with the properties shown in FIGS. 1 and 2 and set forth below:

$M_n = 26240$

$M_w = 175500$

$M_w/M_n = 6.69$

Molecular weight distribution was determined by gel permeation chromatography using polystyrene standards, with the results shown in FIG. 1. The GPC trace in FIG. 1 demonstrates that the prepolymers were linked to produce a copolymer having a higher molecular weight and dispersivity than the homopolymer blocks. The DMA trace in FIG. 2 shows the melt transition of random block (BAMO-GAP)<sub>n</sub> at 75-80°C with a material modulus reducing only slowly before this point.

EXAMPLES 9-11 (Random block copolymer of poly(3-azidomethyl-3-methyloxetane) and poly(3,3-bis(azidomethyl)oxetane) linked with a urethane oligomer)

In a 500 ml round bottom flask, 45 grams of difunctional poly(3-azidomethyl-3-methyloxetane) with a hydroxyl equivalent weight of 3125 and 15 grams of poly(3,3-bis(azidomethyl)oxetane) with a hydroxyl equivalent weight of 3152 were dissolved in 300 ml of tetrahydrofuran. The solution was concentrated and dried by evaporation of the tetrahydrofuran or a rotovapor until a solution with 90 grams of solvent remained. To this solution 0.6 grams of dibutyltin dichloride and 3.34 grams of toluene-2,4-diisocyanate was added and the mixture allowed to react for 3 hours to end-cap the prepolymer.

For Example 9, 0.22 grams of butanediol was added to one quarter of the isocyanate end-capped prepolymer mixture. The reaction was allowed to continue for 14 hours before it was precipitated with methanol in a volume ratio of 1:5. The methanol was decanted off, and the precipitated polymer was washed three times with fresh methanol (1:5 volume ratio) to give a rubbery granular product.

For Example 10, a urethane oligomer was derived from a mixture of 2 ml of tetrahydrofuran, 0.42 grams of toluene-2,4-diisocyanate, 0.43 grams of butane-1,4-diol, and 0.1 grams of dibutyltin dichloride, which were allowed to react for one hour. The urethane oligomer was then added to one quarter of the isocyanate end-capped prepolymer mixture and allowed to react for 14 hours before it was precipitated with methanol in a volume ratio of 1:5. The methanol was decanted off, and the precipitated polymer was washed three times with fresh methanol (1:5 volume ratio) to give a rubbery granular product.

For Example 11, a urethane oligomer was derived from a mixture of 2 ml of tetrahydrofuran, 0.83 grams of toluene-2,4-diisocyanate, 0.65 grams of butane-1,4-diol, and 0.1 grams of dibutyltin dichloride, which were allowed to react for one

hours. The urethane oligomer was then added to one quarter of the isocyanate end-capped prepolymer mixture and allowed to react for 14 hours before it was precipitated with methanol in a volume ratio of 1:5. The methanol was decanted off, and the precipitated polymer was washed three times with fresh methanol (1:5 volume ratio) to give a rubbery granular product.

TABLE

	Example 9	Example 10	Example 11
diol:diisocyanate molar ratio	1:0	2:1	3:2
Mn	11440	12340	13240
Mw	134800	142000	122600
Mw/Mn	11.78	11.51	9.26
E <sup>1.0</sup>	520	669	823
$\epsilon_m$ (%)	311	897	536
$\epsilon_f$ (failure) (%)	372	1082	562
$\sigma_m$ (psi)	153	345	300
$\sigma_m$ (corrected) (psi)	678	3575	2381
ShoreA	49	60	65

The foregoing detailed description of the preferred embodiments of the invention has been provided for the purpose of explaining the principles of the invention and its practical application, thereby enabling others skilled in the art to understand the invention for various embodiments and with various modifications as are suited to the particular use contemplated. The foregoing detailed description is not intended to be exhaustive or to limit the invention to the precise embodiments disclosed. Modifications and equivalents will be apparent to practitioners skilled in this art and are encompassed within the spirit and scope of the appended claims.

## WHAT IS CLAIMED IS:

1. A method of preparing a thermoplastic elastomer having A blocks which are crystalline at temperatures below about 75°C and the B blocks which are amorphous at temperatures above about -20°C, the method comprising:

- 5 (a) dissolving the A blocks and B blocks terminated with respective isocyanate-reactive groups at approximately the stoichiometric ratios that are intended to be present in the thermoplastic elastomer into solution comprising at least one non-halogenated solvent, the A blocks being crystalline at temperatures below about 75°C and derived from monomers comprising at least one member selected from the group  
10 consisting of oxetane derivatives and tetrahydrofuran derivatives, the B blocks being amorphous at temperatures above about -20°C and derived from monomers comprising at least one member selected from the group consisting of oxetane and derivatives thereof, tetrahydrofuran and derivatives thereof, and oxirane and derivatives thereof;
- 15 (b) drying the dissolved A blocks and B blocks of water by azeotropic distillation of the non-halogenated solvent;
- (c) end-capping the dried A blocks and the dried B blocks in the non-halogenated solvent by reacting the dried A blocks and the dried B blocks with at least one diisocyanate in which a first isocyanate moiety thereof is substantially more  
20 reactive with the terminal groups of the blocks as a second isocyanate moiety thereof, whereby the more reactive first isocyanate moiety is capable of reacting with the terminal groups of the blocks, leaving the less reactive second isocyanate moiety free and unreacted; and
- (d) linking the end-capped A blocks and the end-capped B blocks together  
25 in the non-halogenated solvent with at least one linking compound comprising two isocyanate-reactive groups which are sufficiently sterically unhindered to react with the free and unreacted isocyanate moieties of the end-capped polymers.

2. A method as defined in claim 1, wherein said dissolving step (a) comprises separately dissolving the A blocks and the B blocks into respective solutions.

3. A method as defined in claim 2, wherein said end-capping step (c) comprises separately end-capping the A blocks and the B blocks in the respective solutions.

4. A method as defined in claim 1, wherein said steps (a), (b), (c), and (d) are conducted in the absence of any halogenated solvent.

5. A method as defined in claim 1, wherein the non-halogenated solvent comprises one or more organic ethers.

6. A method as defined in claim 5, wherein the organic ether comprises one or more members selected from the group consisting of tetrahydrofuran, ethylene glycol dimethyl ether, and 1,4-dioxane.

7. A method as defined in claim 6, wherein the organic ether comprises tetrahydrofuran.

8. A method as defined in claim 1, wherein the non-halogenated solvent comprises one or more organic esters.

9. A method as defined in claim 8, wherein the organic ester comprises ethyl acetate.

10. A method as defined in claim 1, wherein the non-halogenated solvent comprises one or more organic ketones.

11. A method as defined in claim 10, wherein the organic ketone comprises methyl ethyl ketone.

12. A method as defined in claim 1, wherein the linking compound is derived from at least one diisocyanate and at least one difunctional urethane oligomer comprising two functional groups which are reactive with isocyanate moieties of the diisocyanate.

5 13. A method as defined in claim 1, wherein:

the first isocyanate moiety of the diisocyanate is at least five times more reactive with the terminal groups of each of the blocks as the second isocyanate moiety, whereby the more reactive first isocyanate moiety is capable of reacting with and end capping the terminal groups of the blocks, leaving the less reactive second isocyanate moiety free and unreacted; and

10 the linking compound has two isocyanate-reactive hydroxyl groups which are sufficiently sterically unhindered to be reactive with the free and unreacted second isocyanate groups of the end-capped blocks.

14. A method as defined in claim 1, wherein the diisocyanate comprises  
15 toluene diisocyanate.

15. A method as defined in claim 1, wherein the thermoplastic elastomer has a weight average molecular weight of at least 40,000 and a number average molecular weight of at least 10,000.

16. A method as defined in claim 1, wherein the thermoplastic elastomer  
20 has a weight average molecular weight of at least 60,000 and a number average molecular weight of at least 12,000.

17. A method as defined in claim 1, wherein the thermoplastic elastomer has a weight average molecular weight of at least 80,000 and a number average molecular weight of at least 15,000.

18. A method as defined in claim 1, wherein the isocyanate-reactive terminal groups of the A and B blocks are hydroxyl groups.

19. A method of making an energetic composite binder comprising:

- (a) dissolving the A blocks and B blocks terminated with respective  
5 isocyanate-reactive groups at approximately the stoichiometric ratios that are intended to be present in the thermoplastic elastomer into solution comprising at least one non-halogenated solvent, the A blocks being crystalline at temperatures below about 75°C and derived from monomers comprising at least one member selected from the group consisting of oxetane derivatives and tetrahydrofuran derivatives, the B blocks being  
10 amorphous at temperatures above about -20°C and derived from monomers comprising at least one member selected from the group consisting of oxetane and derivatives thereof, tetrahydrofuran and derivatives thereof, and oxirane and derivatives thereof;
- (b) drying the dissolved A blocks and B blocks of water by azeotropic  
15 distillation of the non-halogenated solvent;
- (c) end-capping the dried A blocks and the dried B blocks in the non-halogenated solvent by reacting the dried A blocks and the dried B blocks with at least one diisocyanate in which a first isocyanate moiety thereof is substantially more reactive with the terminal groups of the blocks as a second isocyanate moiety thereof,  
20 whereby the more reactive first isocyanate moiety is capable of reacting with the terminal groups of the blocks, leaving the less reactive second isocyanate moiety free and unreacted;
- (d) linking the end-capped A blocks and the end-capped B blocks together in the non-halogenated solvent with at least one linking compound comprising two  
25 isocyanate-reactive groups which are sufficiently sterically unhindered to react with the free and unreacted isocyanate moieties of the end-capped polymers; and
- (e) blending the thermoplastic elastomer with about 50 wt% to about 95

wt% of at least one solid selected from the group consisting of fuel material particulates and oxidizer particulates.

20. A method as defined in claim 19, wherein said dissolving step (a) comprises separately dissolving the A blocks and the B blocks into respective  
5 solutions.

21. A method as defined in claim 20, wherein said end-capping step (c) comprises separately end-capping the A blocks and the B blocks in the respective solutions.

22. A method as defined in claim 19, wherein said steps (a), (b), (c), and  
10 (d) are conducted in the absence of any halogenated solvent.

23. A method as defined in claim 19, wherein the non-halogenated solvent comprises one or more organic ethers.

24. A method as defined in claim 23, wherein the organic ether comprises one or more members selected from the group consisting of tetrahydrofuran, ethylene  
15 glycol dimethyl ether, and 1,4-dioxane.

25. A method as defined in claim 23, wherein the organic ether comprises tetrahydrofuran.

26. A method as defined in claim 19, wherein the non-halogenated solvent comprises one or more organic esters.

20 27. A method as defined in claim 26, wherein the organic ester comprises ethyl acetate.

28. A method as defined in claim 19, wherein the non-halogenated solvent comprises one or more organic ketones.

29. A method as defined in claim 28, wherein the organic ketone comprises methyl ethyl ketone.

30. A method of making a rocket motor propellant comprising making a binder as defined in claim 19.

5 31. A method of making a gun propellant comprising making a binder as defined in claim 19.

32. A method of making an explosive comprising making a binder as defined in claim 19.

10 33. A method of making a gasifier comprising making a binder as defined in claim 19.

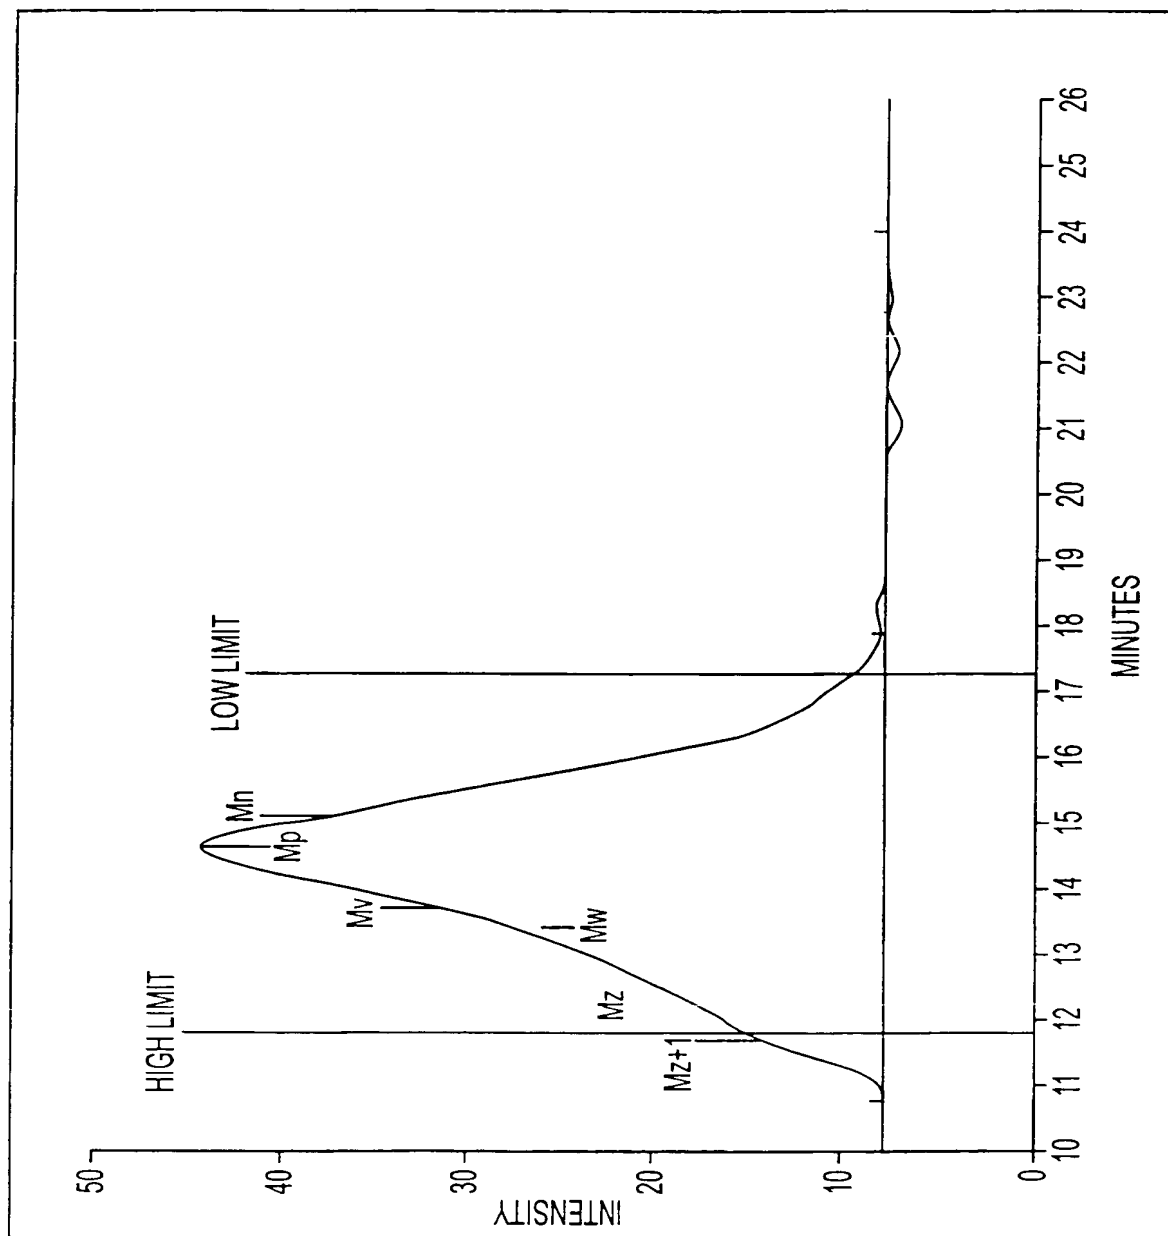


FIG. 1

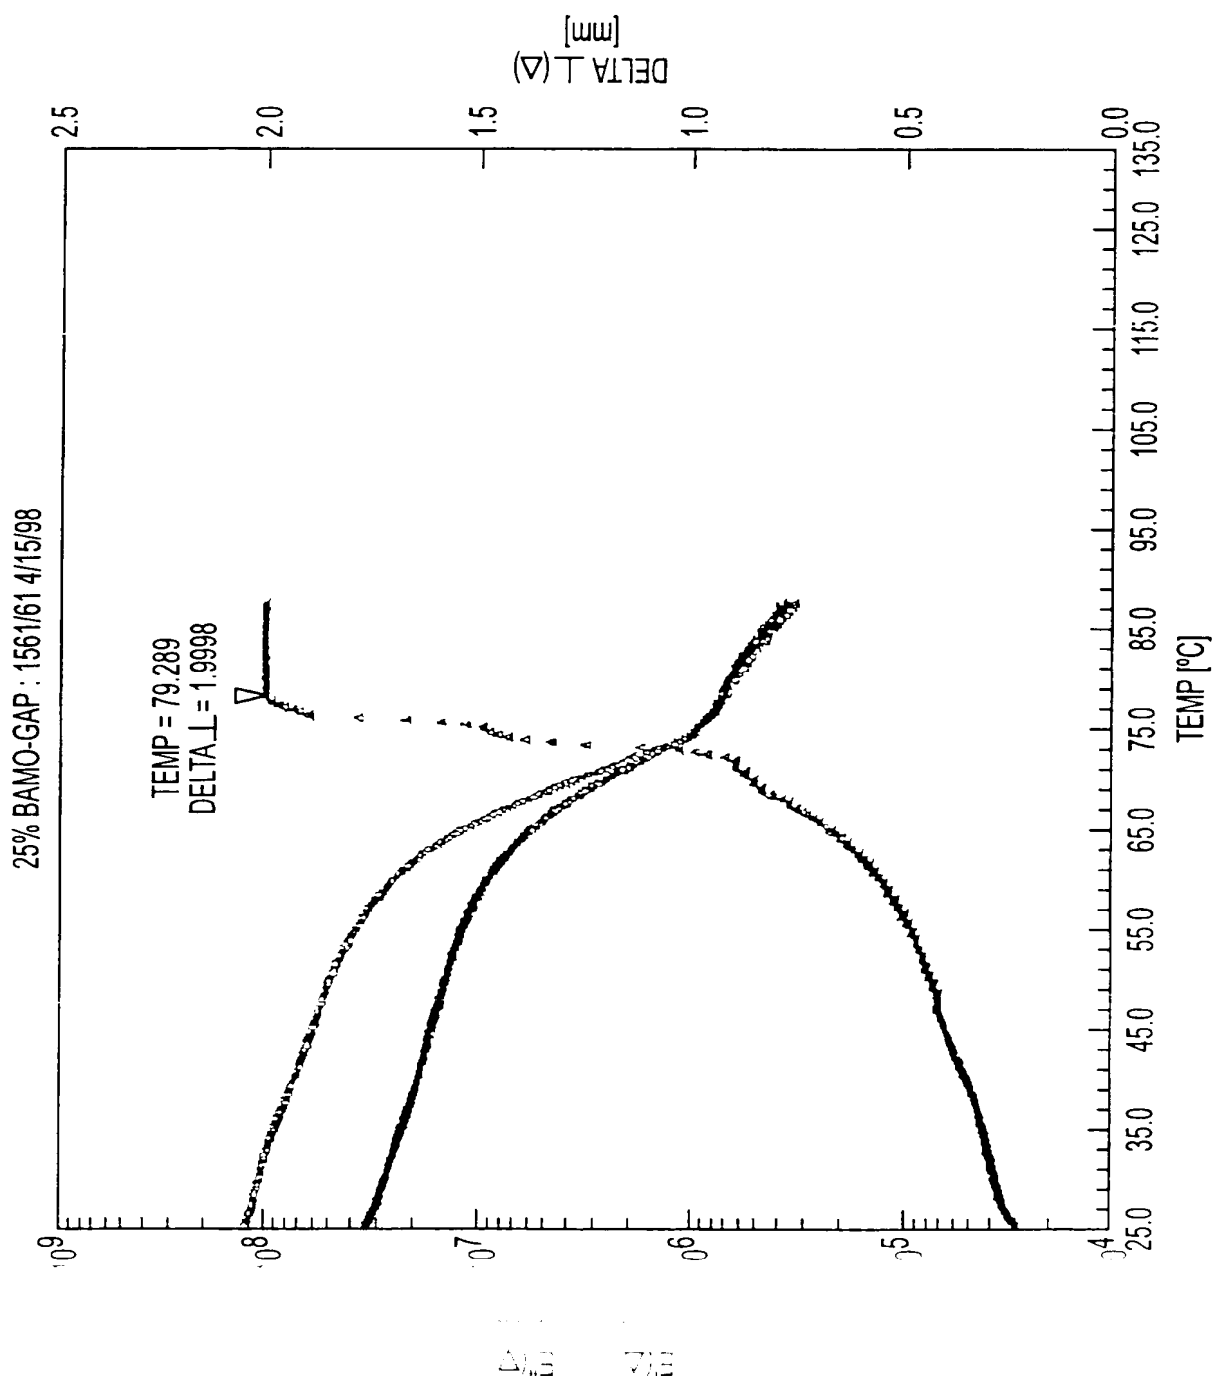


FIG. 2

**METHOD FOR THE SYNTHESIS OF ENERGETIC THERMOPLASTIC  
ELASTOMERS IN NON-HALOGENATED SOLVENTS**

**BACKGROUND OF THE INVENTION**

5

1. Field of the Invention

This invention relates to a method of synthesizing energetic thermoplastic elastomers which are useful as binders of high energy compositions, such as rocket motor propellants, gun propellants, explosive munitions, gas generants of vehicle supplemental restraint systems, or the like.

10

2. Description of the Related Art

Solid high energy compositions, such as propellants, explosives, gas generants, and the like comprise solid particulates, such as fuel particulates and/or oxidizer particulates, dispersed and immobilized throughout a polymeric binder matrix.

15

Conventional solid composite propellant binders utilize cross-linked elastomers in which prepolymers are cross-linked by chemical curing agents. As outlined in detail in U.S. Patent No. 4,361,526, there are important disadvantages to using cross-linked elastomers as binders. Cross-linked elastomers must be cast within a short period of time after addition of the curative, which time period is known as the "pot life". Disposal of a cast, cross-linked propellant composition is difficult, and usually is accomplished by burning, which poses environmental problems. Furthermore, current state-of-the-art propellant compositions have serious problems that include their use of nonenergetic binders which have lower performance and high end-of-mix viscosities.

20

In view of the inherent disadvantages associated with the use of cross-linked elastomeric polymers as binder materials, there has been considerable interest in

25

requirements expected of propellant formulations, particularly the requirement of

30

being processible below about 120°C, it being desirable that a thermoplastic elastomeric polymer for use as a binder in a high energy system have a melting temperature of between about 60°C and about 120°C. The melting temperature is desirably at least about 60°C because the propellant composition may be subject to

5 somewhat elevated temperatures during storage and transport, and significant softening of the propellant composition at such elevated temperatures is unwanted. The setting of the melting temperature at not more than about 120°C is determined by the instability, at elevated temperatures, of many components which ordinarily go into high energy compositions, particularly oxidizer particulates and energetic plasticizers.

10 Many thermoplastic elastomers exhibit high melt viscosities which preclude high solids loading and many show considerable creep and/or shrinkage after processing. Thermoplastic elastomers typically obtain their thermoplastic properties from segments that form glassy domains which may contribute to physical properties adverse to their use as binders. Crosslinkable thermoplastic elastomers are block

15 copolymers with the property of forming physical cross-links at predetermined temperatures. One thermoplastic elastomer, e.g., Kraton, brand TPE, obtains this property by having the glass transition point of one component block above room temperature. At temperatures below 109°C, the glassy blocks of Kraton form glassy domains and thus physically cross-link the amorphous segments. The strength of

20 these elastomers depends upon the degree of phase separation. Thus, it remains desirable to have controlled, but significant, immiscibility between the two types of blocks, which is a function of their chemical structure and molecular weight. On the other hand, as the blocks become more immiscible, the melt viscosity increases, thus having a deleterious effect on the processibility of the material.

25       Above-mentioned U.S. Patent No. 4,361,526 proposes a thermoplastic elastomeric binder which is a block copolymer of a diene and styrene, the styrene

processed with a volatile organic solvent. Solvent processing is undesirable inasmuch as the dissolved composition cannot be cast in a conventional manner, e.g., into a rocket motor casing. Furthermore, solvent-based processing presents problems with respect to removal and recovery of solvent.

5           The preparation of energetic thermoplastic elastomers prepared from polyoxetane block copolymers has been proposed in U.S. Patent No. 4,483,978 to Manser and U.S. Patent No. 4,806,613 to Wardle ("the '613 patent"), the complete disclosures of which are incorporated herein by reference to the extent that these disclosures are compatible with this invention. According to the latter, these materials  
10       overcome the disadvantages associated with conventional cross-linked elastomers such as limited pot-life, high end-of-mix viscosity, and scrap disposal problems.

          The thermoplastic materials proposed by the '613 patent involve elastomers having both (A) and (B) blocks, each derived from cyclic ethers, such as oxetane and oxetane derivatives and tetrahydrofuran (THF) and tetrahydrofuran derivatives. The  
15       monomer or combination of monomers of the (A) blocks are selected for providing a crystalline structure at usual ambient temperatures, such as below about 60°C, whereas the monomer or combination of monomers of the (B) blocks are selected to ensure an amorphous structure at usual ambient temperatures, such as above about -20°C. Typical of these materials is the random block copolymer (poly(3-  
20       azidomethyl-3-methyloxetane)-poly(3,3-bis(azidomethyl)oxetane), also known as poly(AMMO/BAMO). These block copolymers have good energetic and mechanical properties. Additionally, the block copolymers can be processed without solvents to serve as binders in high performance, reduced vulnerability explosive, propellant, and gas generant formulations. Advantageously, the block copolymers exhibit good  
25       compatibility with most materials used in such energetic formulations.

drawbacks have been associated with the use of the halogenated solvents disclosed in the '978 and '613 patents. One drawback is the detrimental impact that halogenated solvents have on the environment. Another drawback of halogenated solvents is attributable to the additional drying steps which the pre-polymer blocks are subject to after their formation. The pre-polymer blocks are typically dried either with chemical drying agent, e.g., desiccants followed by filtration or by the azeotropic removal of water. The azeotropic removal of water is performed with toluene, which is different from the solvent selected for linking the pre-polymer blocks. The performance of an additional drying step and the use of different solvents in the azeotropic drying step and the linking step complicates processing and increases overall processing time. Moreover, toluene does not completely dissolve the end-capped blocks prior to the linking reaction and can interfere with the end-capping and linking catalysts. Yet another drawback associated with halogenated solvents is the relatively low concentrations of pre-polymer blocks and linking compounds that may be loaded in halogenated solvents for processing. The loading of the thermoplastic elastomer ingredients is limited by the solubility of the ingredients in the solvent. For example, the currently used process for forming thermoplastic elastomers by linking energetic polyether diols and diisocyanates typically use approximately 30-40% by weight solutions of the reactants in dichloromethane and 0.1% by weight tin catalyst. Additionally, completion of the reaction in halogenated solvents typically takes several days to a week.

United States Patent No. 4,393,199 to Manser describes the use of a non-halogenated solvent, nitromethane, during cationic polymerization of cyclic ethers. However, it has been found that cyclic ether pre-polymer blocks are not sufficiently soluble in nitromethane to adequately link the pre-polymer blocks once they are formed.

drawbacks associated with halogenated solvents while reducing processing time and increasing productivity.

### SUMMARY OF THE INVENTION

It is, therefore, an object of this invention to provide a method for the  
5 synthesis of energetic thermoplastic elastomers that addresses the aforementioned problems associated with the related art and realizes the advancement expressed above.

In accordance with the principles of this invention, these and other objects are attained by a method of synthesizing an energetic thermoplastic elastomer binder that  
10 is in a solid state at room temperature and is derived from A blocks which are crystalline at temperatures below about 60°C and B blocks are amorphous at temperatures above about -20°C. The A blocks may include one or more polyethers derived from monomers of oxetane derivatives and/or tetrahydrofuran derivatives. The B blocks may include one or more polyethers derived from monomers of oxetane  
15 and its derivatives, tetrahydrofuran and its derivatives, and/or oxirane and its derivatives. The polyoxetane blocks A and polyoxirane blocks B may be linked by end-capping the blocks with diisocyanates and linking the end-capped blocks with difunctional linking chemicals in which each of the two terminal functional groups are reactive with an isocyanate moiety of the diisocyanate.

20 In accordance with one embodiment of this method, the A and B blocks are dissolved into solution comprising one or more non-halogenated solvents. The solvent or solvents selected preferably are capable of dissolving more than 25% by weight of the blocks (based on total weight of the solvents and blocks) into solution, more preferably at least 35% by weight into solution, and still more preferably 50%  
25 by weight into solution. This solvent, preferably, does not interfere with the end-capping

and ketones. Tetrahydrofuran is the preferred solvent because of its excellent solubility. The A and B blocks are mixed together at approximately the stoichiometric ratios that the blocks are intended to be present in the energetic thermoplastic elastomer. The solution is then dried by azeotropic removal of water with excess solvent. The A and B blocks are end-capped in the solvent with one or more diisocyanates. The end-capping may be performed prior or subsequent to the mixing step, but subsequent to the drying step. The diisocyanate preferably has one isocyanate moiety which is more reactive, preferably at least about five times as reactive, with the terminal hydroxyl group of each of the blocks than the other isocyanate moiety, whereby the more reactive isocyanate moiety tends to react with the terminal-hydroxyl groups of the blocks, leaving the less reactive isocyanate moiety free and unreactive. The mixture is reacted with a chain extender having two isocyanate-reactive groups that are sufficiently unhindered to react with the free and unreacted isocyanate groups of the end-capped blocks. In this manner, the end-capped blocks are linked, but not crosslinked, to form a thermoplastic elastomer.

It is still a further object of this invention to provide a method for making propellants, especially rocket propellants and gun propellants, explosives, gas generants, or the like containing an energetic thermoplastic elastomer binder by procedures including the above-discussed method.

These and other objects, features, and advantages of the present invention will become apparent from the accompanying drawings and following detailed description which illustrate and explain, by way of example, the principles of this invention.


#### BRIEF DESCRIPTION OF THE DRAWINGS

The accompanying drawings are provided to facilitate an understanding of the principles of this invention. In such drawings, FIGS. 1 and 2 are graphs showing the

## DETAILED DESCRIPTION OF THE INVENTION

The thermoplastic elastomer  $(AB)_n$  polymers of this invention include A blocks which are crystalline at temperatures below about  $60^\circ\text{C}$ , preferably at temperatures below about  $75^\circ\text{C}$ , and B blocks which are amorphous at temperatures down to about  $-20^\circ\text{C}$ . Each of the A and B blocks are polyethers derived from cyclic ethers. Specifically, the A blocks are derived from monomers of oxetane derivatives and/or THF derivatives. The B blocks are derived from monomers of oxetane and its derivatives, THF and its derivatives, and/or monomers of oxirane and its derivatives, preferably energetic oxirane derivatives. The polymers melt at temperatures between about  $60^\circ\text{C}$  and about  $120^\circ\text{C}$ , and more preferably between about  $75^\circ\text{C}$  and about  $100^\circ\text{C}$ . The A and B blocks are mutually miscible in the melt. Consequently, the melt viscosity of the block copolymer decreases rapidly as the temperature is raised above the melting point, whereby high energy formulations may include high solids content, e.g., up to about 95% by weight of solid particulates, and can be easily processed. The invention also includes other thermoplastic elastomer block structures, such as ABA tri-block polymers and  $A_nB$  star polymers. Contributing to the miscibility of the A and B blocks is their similar chemical structure.

Oxetane monomer units that may be used in forming the A and B blocks of the present invention have the general formula:

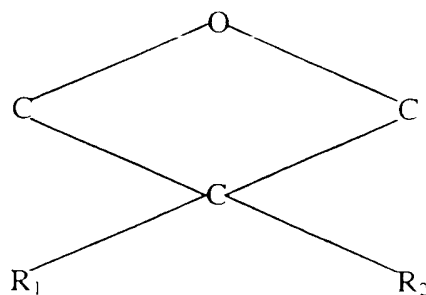


wherein the  $R_1$  and  $R_2$  groups are the same or different and are selected from moieties having the general formula:  $-(CH_2)_nX$ , where  $n$  is 0-10 and  $X$  is selected from the group consisting of  $-H$ ,  $-NO_2$ ,  $-CN$ ,  $-Cl$ ,  $-F$ ,  $-O$ -alkyl,  $-OH$ ,  $-I$ ,  $-ONO_2$ ,  $-N(NO_2)$ -alkyl,  $-C\equiv CH$ ,  $-Br$ ,  $-CH=CH(H \text{ or alkyl})$ ,  $-CO_2$ -(H or alkyl),  $-N(H \text{ or alkyl})_2$ ,

5  $-O-(CH_2)_{1.5}-O-(CH_2)_{0.8}-CH_3$ , and  $N_3$ .

Examples of oxetane derivatives that may be used in forming the A blocks in accordance with this invention are generally symmetrically-substituted oxetanes including, but are not limited to, the following: BEMO (3,3-bis(ethoxymethyl)oxetane), BCMO (3,3-bis(chloromethyl)oxetane), BMMO (3,3-bis(methoxymethyl)oxetane), BFMO (3,3-bis(fluoromethyl)oxetane), BAOMO (3,3-bis(acetoxymethyl)oxetane), BHMO (3,3-bis(hydroxymethyl)oxetane), BMEMO (3,3-bis(methoxyethoxymethyl)oxetane), BIMO (3,3-bis(iodomethyl)oxetane), BNMO (3,3-bis(nitratomethyl)oxetane), BMNAMO (3,3-bis(methylnitraminomethyl)oxetane), and BAMO (3,3-bis(azidomethyl)oxetane).


15 Examples of oxetanes derivatives that may be used in forming the B blocks in accordance with this invention are generally unsymmetrically-substituted oxetanes including, but are not limited to, the following: HMMO (3-hydroxymethyl-3-methyloxetane), OMMO (3-octoxymethyl-3-methyloxetane), CMMO (3-chloromethyl-3-methyloxetane), AMMO (3-azidomethyl-3-methyloxetane), IMMO (3-iodomethyl-3-methyloxetane), PMMO (3-propynomethylmethyloxetane), NMMO (3-nitratomethyl-3-methyloxetane), and MNAMMO (3-methylnitraminomethyl-3-methyloxetane).

Tetrahydrofuran monomer units that may be used in forming the blocks of the present invention have the general formula:

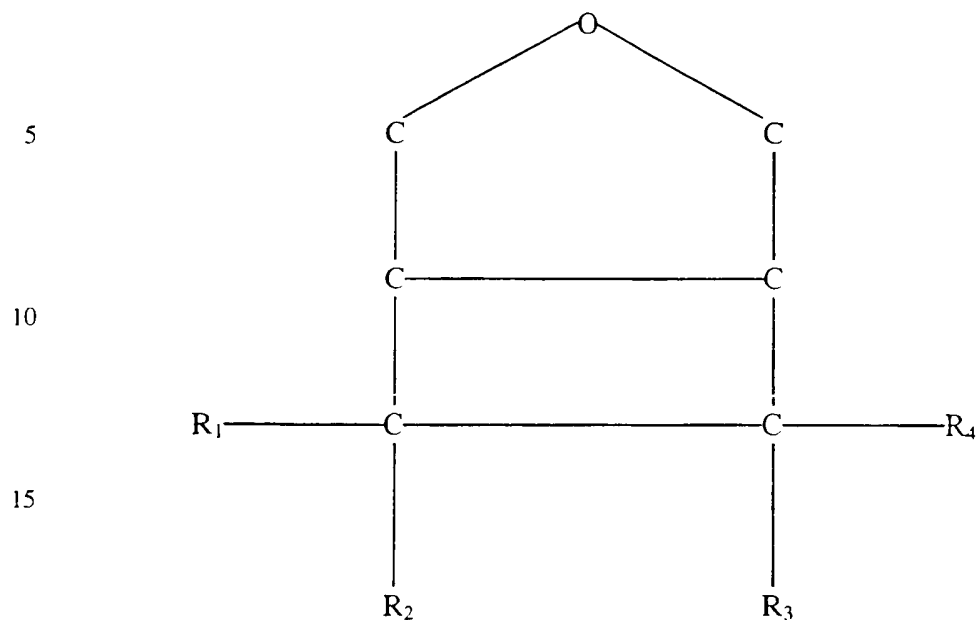

20 wherein the  $\text{R}_1$ - $\text{R}_4$  groups are the same or different and are selected from moieties set forth above in connection with the description of suitable oxetane derivatives.

Oxirane monomer units used in forming the B blocks of the present invention have the general formula:

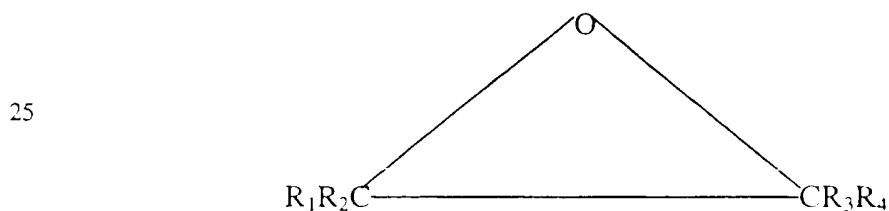

wherein  $\text{R}_1$  and  $\text{R}_3$  are independently selected from hydrogen and methyl, and  $\text{R}_2$  and  $\text{R}_4$  are independently selected from hydrogen, alkyl containing from 1 to 10 carbon atoms, chloroalkyl and bromoalkyl containing 1 to 2 carbon atoms, and nitroalkyl,

fluoronitroalkyl, and fluoronitroalkoxyalkyl containing 1 to 5 carbon atoms provided that at least one of  $R_1$  to  $R_4$  is not hydrogen.

Examples of energetic oxiranes that may be used in forming the B blocks in accordance with this invention include, but are not limited to glycidyl azide polymers (C<sub>3</sub>H<sub>5</sub>N<sub>3</sub>O) (GAP), especially difunctional GAP, and poly(glycidyl nitrate) (C<sub>3</sub>H<sub>5</sub>NO<sub>4</sub>) (PGN). These polymers have a glass transition temperature below about -20°C and are amorphous at temperatures above -20°C.

Forming thermoplastic elastomers in accordance with the invention involves (1) formation of at least one polyether-derived homopolymer, copolymer, or terpolymer serving as the A blocks and crystalline in nature with a relatively elevated melting point, i.e., between about 60°C and about 120°C, preferably near 80°C and (2) formation of at least one polyether-derived homopolymer, copolymer, or terpolymer serving as the B blocks and amorphous in structure with a glass transition temperature ( $T_g$ ) below about -20°C.

The selection of the A block may be made based on the properties desired for the intended application of the thermoplastic elastomer. Examples of preferred crystalline A blocks include blocks possessing high energy density, such as those formed from BAMO and/or BMNAMO monomers. Melting temperature and ether oxygen content are additional factors that may be taken into consideration in selecting the monomers.

The properties of the block polymer depends upon the molecular weights of the individual blocks and the total molecular weights. Typically the A blocks have number average molecular weights ranging from about 3000 to about 8000, whereas the B blocks have number average molecular weights ranging from about 3000 to about 15,000. The molecular weights of A blocks may be determined by gel permeation chromatography (GPC) using a polystyrene calibration. The molecular weights of B blocks may be determined by GPC using a polyethylene glycol (PEG) calibration.

15:85 to about 40:60. The preferred sizes of the A and B blocks for any particular binder application may be empirically determined.

The thermoplastic elastomers of this invention preferably are in a solid state at room temperature, have a weight average molecular weight of at least 40,000, more preferably at least 60,000, still more preferably at least 80,000, and a number average molecular weight of at least 10,000, more preferably at least 12,000, still more preferably at least 15,000.

Thermoplastic elastomers produced in accordance with the present invention may be admixed with other components of a high energy formulation, such as a propellant formulation. The binder system, in addition to the thermoplastic elastomers, may optionally contain one or more plasticizers for improving the resistance of the thermoplastic elastomer to hardening at low temperatures, which may be included at a plasticizer-to-thermoplastic elastomer weight ratio of up to about 1:1. Suitable high energy plasticizers include glycidyl azide polymer (GAP), nitroglycerine, butanetriol trinitrate (BTTN), alkyl nitratomethyl nitramines, trimethylolethane trinitrate (TMETN), diethylene glycol dinitrate, triethylene glycol dinitrate (TEGDN), bis(dinitropropylacetal/-bis(dinitropropyl)formal (BDNPA/F), and mixtures thereof. Inert plasticizers can also be used. Representative inert plasticizers include, by way of example, dioctyladipate (DOA), isodecylperlargonate (IDP), dioctylphthalate (DOP), dioctylmaleate (DOM), dibutylphthalate (DBP), oleyl nitrile, triacetin, and combinations thereof. The binder system may also contain a minor amount of a wetting agent or lubricant that enables higher solids loading.

The solids content of the high energy composition generally ranges from about 50 wt% to about 95 wt%, higher solids loading generally being preferred so long as such loading is consistent with structural integrity. The solids include fuel material

aluminum, magnesium, boron, and beryllium. Representative oxidizers and co-oxidizers include ammonium perchlorate; hydroxylammonium nitrate (HAN); ammonium dinitramide (ADN); hydrazinium nitroformate; ammonium nitrate; nitramines such as cyclotetramethylene tetranitramine (HMX) and cyclotrimethylene trinitramine (RDX), 2,4,6,8,10,12-hexanitro-2,4,6,8,10,12-hexaazatetracyclo[5.5.0.0<sup>5,9</sup>.0<sup>3,11</sup>]-dodecane or 2,4,6,8,10,12-hexanitrohexaazaisowurtzitane (CL-20 or HNIW), and/or 4,10-dinitro-2,6,8,12-tetraoxa-4,10-diazatetracyclo[5.5.0.0<sup>5,9</sup>.0<sup>3,11</sup>]dodecane (TEX), and any combination thereof. In addition, the high energy composition may include minor amounts of additional components known in the art, such as bonding agents, burn rate modifiers, ballistic modifiers (e.g., lead), etc.

The thermoplastic elastomer may be mixed with the solids and other components of high energy formulation at temperatures above its melting temperature. Blending may be done in conventional mixing apparatus. Because of the low viscosities of the molten polymer, no solvents are required for blending or other processing, such as extrusion.

An important advantage of having a binder which is meltable is that the elastomer from an outdated device containing can be melted down and reused. At the time of such remelting, the binder might be reformulated, e.g., by addition of additional fuel or oxidizer particulates. Accordingly, the thermoplastic elastomer provides for its eventual recycle, as opposed to the burning required for disposal of cross-linked compositions. Because the "pot life" of the thermoplastic propellant exceeds that which would reasonably be required of a propellant or explosive formulation, if any problems develop during casting, the process can be delayed as long as is reasonably necessary, merely by maintaining the formulation in a molten state.

The oxetane homopolymer blocks may be formed according to the cationic polymerization technique taught by Manser in U.S. Patent No. 4,393,199, the complete disclosure of which is incorporated herein by reference. The oxirane homopolymer blocks may be formed according to the technique taught in U.S. Patent  
5 No. 5,120,827, the complete disclosure of which is incorporated herein by reference. The technique employs an adduct of a substance such as a diol, e.g., 1,4-butane diol (BDO), and a catalyst for cationic polymerization, e.g.,  $\text{BF}_3$ -etherate. This adduct forms with the oxetane monomer an initiating species which undergoes chain extension until n moles of monomer have been incorporated in the molecule, n being  
10 the ratio of monomers to adduct present. By adjusting the ratio of monomers to adduct present, the average molecular weight of the polymer which forms may be adjusted. If two or more monomers are present, incorporation of the monomers will be generally random but may depend upon the relative reactivities of the monomers in the polymerization reaction.

15 Another suitable catalyst system includes co-catalytically effective quantities of one or more triethoxonium salts and one or more alcohols, as disclosed in U.S. Application No. 08/233,219, the complete disclosure of which is incorporated herein by reference to the extent that the disclosure is compatible with this invention. Examples of triethoxonium salts include triethoxonium hexafluorophosphate,  
20 triethoxonium hexafluoroantimonate, and triethoxonium tetrafluoroborate.

It is understood that although the isocyanate-reactive terminal functional groups of the blocks are referred to herein as being hydroxyl groups, the isocyanate-reactive functional groups may also be amines, amides, and/or carboxyl groups.

The crystalline polyoxetane A blocks and amorphous B blocks, i.e., the  
25 respective prepolymers, are each end-capped together or separately with one or more

sufficiently unhindered to allow them to react with the free isocyanate moieties of the end-capped copolymers and thereby join the blocks together.

Oxetane, THF, and oxirane polymer blocks normally have terminal isocyanate-reactive (e.g., hydroxyl) functions which are end-capped with the diisocyanates in accordance with the invention. Preferably, a first one the isocyanate moieties of the end-capping compound is substantially more reactive with the terminal-hydroxyl moieties of the polymer blocks than the other (e.g., second) isocyanate moiety. One of the problems with linking these types of polymer blocks is that substituted oxetane-derived hydroxyl end groups units have neopentyl structures, whereby the terminal primary hydroxyl moieties are substantially hindered and therefore less reactive. The blocks derived from the oxirane derivatives are secondary alcohols, making their hydroxyl groups less reactive than the primary hydroxyl group of the oxetane-derived A-block. The diisocyanate preferably is selected so that one of the isocyanate groups is capable of reacting with a hydroxyl-group of the polymer blocks while the other isocyanate moiety remains free and unreacted. Diisocyanates are preferably used because isocyanates of higher functionality would result in undesirable levels of cross-linking. The different reactivities of the isocyanate moieties is desirable to ensure that substantial chain extension through linking of like blocks does not occur. Thus, for purposes of this invention, one isocyanate moiety of the diisocyanate should preferably be approximately five times more reactive with terminal hydroxyl groups of oxetane and oxirane blocks than the other group. Preferably one isocyanate moiety is at least about ten times more reactive than the other.

One diisocyanate which is especially useful for purposes of the invention is 2,4-toluene diisocyanate (TDI) in which the isocyanate moiety in the 4-position is substantially more reactive with hindered terminal hydroxyl moieties than the

not worked well include diphenylmethylene diisocyanate (MDI) and hexamethylene diisocyanate (HDI).

In the end-capping reaction, the diisocyanate is used at an approximately stoichiometric molar amount relative to terminal hydroxyl groups on the polymer chain. Thus, if the polymer chain has a pair of terminal hydroxyl groups, approximately two molar equivalents, e.g., 1.75-2.2 molar equivalents of diisocyanate are used. In the ideal reaction, all of the more reactive isocyanate moieties would react with terminal hydroxyl groups, leaving all of the less reactive isocyanate moieties free. Practically, not all of the diisocyanate reacts in this manner, and some chain extension does occur. Thus, the end-capping reaction may be maximized for particular polymer chains by some adjustment in the relative molar ratios of polymer block and diisocyanate.

In one variant embodiment, the A blocks and B blocks are reacted separately with the diisocyanate, so that there is no competition of the blocks for diisocyanate molecules and each separate end-capping reaction may be carried to substantial completion. The diisocyanate may react more rapidly with one block than the other, but this difference can be compensated for by a longer reaction time with the slower reacting block. The reactivity of the terminal hydroxyl groups varies according to steric factors and also according to side-chain moieties. Energetic oxetanes, for example, generally have side-chain moieties that are electron-withdrawing, making their terminal hydroxyl groups less reactive. Once end-capped with diisocyanate, the reactivities of the polymers for linking purposes is essentially dependent only upon the reactivity of the free isocyanate, not on the chemical makeup of the polymer chain itself. Thus end-capped (A) blocks are substantially as reactive as end-capped (B) blocks.

preferably two labile groups, such as chloride or acetate, bound directly to the tin. Suitable tin catalyst include diphenyl tin dichloride, dibutyl tin dichloride, dibutyl tin dilaurate, dibutyl tin diacetate. Tertiary amine catalysts may also be used.

The linking compound is one which has two functional groups which are  
5 sufficiently unhindered to react with the free isocyanate moieties on the end-capped blocks so as to link A blocks to B blocks, A blocks to A blocks, and B blocks to B blocks in a urethane reaction. Preferred functional groups are hydroxyl groups, although amine, amide, and carboxyl groups, and mixtures thereof also react in a urethane reaction. Primary functional groups are preferred. The linking compound  
10 may be a short, straight carbon chain having terminal hydroxyl groups, e.g., 1,4-butanediol, 1,3-propanediol, ethylene glycol, and 1,6-hexanediol. The linking compound should also be miscible with and rapidly dissolve in the non-halogenated solvent so as to ensure chain extension without unwanted amounts of cross-linking.

Alternatively, the linking compound may be an oligomer, especially a  
15 urethane oligomer, having two functional groups which are sufficiently unhindered to react with the free isocyanate moieties on the end-capped blocks so as to link A blocks to B blocks, A blocks to A blocks, and B blocks to B blocks via a urethane reaction. Preferred functional groups of the oligomer are hydroxyl groups, although amine, amide, and carboxyl groups, and mixtures thereof also react in a urethane  
20 reaction. Primary functional groups are preferred.

An oligomeric glycol containing urethane moieties is preferably used to react the free isocyanate moieties on the end-capped blocks. The oligomeric glycol may be prepared from a mixture of one or more diisocyanates and an excess amount of one or more diols. The diisocyanate(s) and diol(s) selected and the ratio of these reagents  
25 may be varied to tailor the properties of the thermoplastic elastomer. The diol-to-

linking of the isocyanate-capped prepolymers, and improve the thermomechanical properties of the final thermoplastic elastomer. A suitable urethane reaction catalyst promotes the reaction between the diisocyanate(s) and diol(s) to form oligomers. The catalysts discussed above in connection with the linking of the A and B blocks are suitable for this purpose. Representative diols that may be selected for preparing the difunctional oligomer include, by way of example, unbranched aliphatic diols having 2 to 7 carbon atoms, such as ethylene glycol, propylene glycol, butylene glycol; and cycloaliphatic diols such as 1,4-cyclohexanedimethanol, and any combination thereof. Representative diisocyanates for preparing the difunctional oligomer include, by way of example, aliphatic diisocyanates such as hexane diisocyanate, and aryl diisocyanates such as methylene-bis(4-phenyl isocyanate), phenylene diisocyanate, toluene diisocyanate, and xylylene diisocyanate, and any combination thereof. Preferably, the difunctional oligomer has a number average molecular weight  $M_n$  of from 350 to 900.

It is to be appreciated that a wide variety of difunctional compounds may be used to link the end-capped blocks.

As in the end-capping reaction, some solvent is preferably used, as is a catalyst, such as described above. Conveniently, the reaction mixtures of the A blocks and B blocks may be mixed together without prior separation of the blocks from their respective end-capping reaction mixtures. The linking compound can be added directly to this mixture of A and B blocks. The catalyst is thereby already present when the linking compound is added.

The linking compound is added in an amount such that the total number of linking-compound functional groups approximately equals the total number of free isocyanate groups of the end-capped polymer blocks. Thus, to provide an  $(AB)_n$

molar ratio is in the range of 0.9-1.1, e.g., 1.0. Accordingly, optimal molar ratios of blocks and linking chemicals may have to be empirically determined.

The end-capping reaction and linking reaction are carried out in a suitable non-halogenated solvent, e.g., one which dissolves the polymer and does not react  
5 with the free isocyanate moieties. Although insubstantial amounts of halogenated solvent may be present, the solution is preferably completely free of any halogenated solvent. The non-halogenated solvent should not react in the urethane reaction and forms an azeotrope with water. Suitable dry solvents include cyclic ethers such as tetrahydrofuran (THF) and 1,4-dioxane; non-cyclic ethers such as ethylene glycol  
10 dimethyl ether; ketones such as methyl ethyl ketone ("MEK"); and esters such as ethyl acetate. Of these, THF is preferred because of its excellent solubility characteristics.

In a preferred embodiment, the solvent forms an azeotrope with water. In this preferred embodiment, after the blocks are dissolved in excess non-halogenated solvent, the solution may be dried by azeotropic distillation of the solvent, and  
15 optionally further concentrated, e.g., via distillation, in the solution to increase the volumetric loading and reaction rate. The blocks then may be end-capped, separately or together, and linked in the same or a different non-halogenated solvent. By distilling off excess solvent to remove water, subsequent reaction with a diisocyanate may proceed without significant interference from competing reactions between the  
20 isocyanate moieties and water. Additionally, the solution remains homogeneous and further distillation serves to concentrate the polymer solution, producing higher reaction rates and requiring less reactor capacity. The reaction rates may be improved by conducting the end-capping reaction at elevated temperatures, such as 30°C to 80°C, more preferably 40°C to 60°C. The process may be conducted by a batch or  
25 continuous method. For example, the prepolymer and catalyst solution may be continuously fed through a mixer/extruder into which is injected a diisocyanate and a

extruder and energetic thermoplastic elastomer is continuously produced for processing.

In the end-capping and block linking steps, the reaction can be followed with NMR and IR. With NMR, the urethane-forming reaction can be followed through the methylene groups on the polymer adjacent to the terminal hydroxyl groups. With IR, the change from isocyanate to urethane can be directly followed.

Synthesis of polyoxetanes is described in U.S. Patent Nos. 4,483,978 and 4,806,613, the complete disclosures of which are incorporated herein by reference to the extent that these disclosures are compatible with the present invention.

The invention will now be described in greater detail by way of the following examples, which are not to be construed as exhaustive as to the scope of this invention.

As referred to herein, "dry" means that less than 1 wt% water was present.

For the following experiments, poly(azidomethyloxirane) was supplied by 3M Speciality Chemicals of St. Paul, MN (Lot L-12564). Unless otherwise specified, all other materials were obtained from Aldrich of Milwaukee, WI.

#### EXAMPLE 1 (poly(3,3-bis(azidomethyl)oxetane))

A 5 liter jacketed flask equipped with a mechanical stirrer was charged with 600 grams of tribromoneopentylalcohol (AmeriBrom, Inc. of New York), 1200 ml of toluene, and 6 grams of tetrabutylammonium bromide. The mixture was cooled to 12°C and 193 grams of sodium hydroxide was added dropwise as a 40 wt% solution keeping the temperature at 12°C. After 36 hours the reaction mixture was washed with water until the pH was less than 9 to obtain the crude product which was distilled

A 5 liter jacketed flask equipped with a mechanical stirrer was charged with 1450 grams of the 3,3-bis(bromomethyl)oxetane and 1720 ml of toluene. The mixture was stirred and heated to 60°C before 1600 ml of water, 14.7 grams of tetrabutylammonium bromide, and 862 grams of sodium azide were added. After 24 hours, the reaction mixture was cooled to room temperature and washed three times with 2000 ml of water. The toluene and water were removed from the organic layer by distillation to give pure 3,3-bis(azidomethyl)oxetane at 85% yield.

Under an argon atmosphere, 14.94 grams of butane diol was added to a flame dried 5 liter round-bottomed flask charged with 1340 ml of dry methylene chloride. To this mixture, 11.77 grams of borontrifluoride-etherate was added and the reaction was allowed to proceed for one hour at room temperature. The reactor was then cooled to -10°C and 937.78 grams of the 3,3-bis(azidomethyl)oxetane was added. The solution was allowed to come to room temperature and left to react for three days. The reaction was then quenched by the addition of 50 ml of saturated brine solution. The organic phase was separated off and washed with 100 ml of 10 wt% sodium bicarbonate solution before the solvent was removed on a rotovapor. The resulting liquid was then poured into 5 liters of methanol to precipitate the polymer, which was filtered from the solution and dried under vacuum at 30°C.

#### EXAMPLE 2 (poly(3-azidomethyl-3-methyloxetane))

A 5 liter jacketed flask equipped with a mechanical stirrer was charged with 1062 grams of sodium azide, 1972 ml of water, and 2450 grams of 3-bromomethyl-3-methyloxetane (supplied by AmeriBrom, Inc. of New York). This mixture was brought to reflux with vigorous mixing. After 48 hours the mixture was cooled to room temperature. The organic layer was separated off and washed three times with 1000 ml of water before being dried over molecular sieves to yield pure 3-azidomethyl-3-methyloxetane at 85% yield.

Under an argon atmosphere, 14.94 grams of butane diol was added to a flame dried 5 liter round-bottomed flask charged with 1.340 ml of dry methylene chloride. To this mixture, 11.77 grams of borontrifluoride-etherate was added and the reaction was allowed to proceed for one hour at room temperature. The reactor was then  
5 cooled to -10°C and 937.78 grams of the 3-azidomethyl-3-methyloxetane was added. The solution was allowed to come to room temperature and left to react for three days. The reaction was then quenched by the addition of 50 ml of saturated brine solution. The organic phase was separated off and washed with 100 ml of 10 wt% sodium  
10 bicarbonate solution before the solvent was removed on a rotovapor. The resulting liquid was then poured into 5 liters of methanol to precipitate the polymer, which was filtered from the solution and dried under vacuum at 30°C.

EXAMPLE 3 (Random block copolymer of poly(3-azidomethyl-3-methyloxetane) and poly(3,3-bis(azidomethyl)oxetane) in THF)

In a one liter round bottom flask, 65 grams of dry difunctional poly(3-  
15 azidomethyl-3-methyloxetane) with a hydroxyl equivalent weight of 3121 and 35 grams of dry poly(3,3-bis(azidomethyl)oxetane) with a hydroxyl equivalent weight of 3235 were dissolved in 650 grams of dry tetrahydrofuran. The solution was concentrated and dried by evaporation of the tetrahydrofuran under reduced pressure via a rotovapor until 100 grams of the solvent remained. To this solution, 0.1 grams  
20 of diphenyltin dichloride and 5.41 grams of toluene-2,4-diisocyanate were added while stirring with a magnetic stirrer at ambient temperature and pressure. After 24 hours, 1.40 grams of butane-1,4-diol was added causing the solution to become steadily more viscous. After another 24 hours, the solution was poured into methanol in a volume ratio of 1:5. The methanol was decanted off, and the precipitated  
25 polymer was washed three times with fresh methanol (1:5 volume ratio) to give a rubbery granular product with the properties set forth below:

$$M_w/M_n = 5.9$$

$$E^{1.0} (\text{psi}) = 754$$

$$\epsilon_m (\%) = 204$$

$$\epsilon_f (\text{failure}) (\%) = 229$$

$$5 \quad \sigma_m (\text{psi}) = 180$$

$$\sigma_m (\text{corrected}) (\text{psi}) = 558$$

$$\text{Shore A} = 64$$

EXAMPLE 4 (Random block copolymer of poly(3-azidomethyl-3-methyloxetane) and poly(3,3-bis(azidomethyl)oxetane) in THF)

10 In a 100 ml round bottom flask, 6.5 grams of dry difunctional poly(3-azidomethyl-3-methyloxetane) with a hydroxyl equivalent weight of 3040 and 3.5 grams of dry poly(3,3-bis(azidomethyl)oxetane) with a hydroxyl equivalent weight of 3235 were dissolved in 60 ml of dry tetrahydrofuran. The solution was concentrated and dried by evaporation of the tetrahydrofuran under reduced pressure via a

15 rotovapor until 10 grams of the solvent remained. To this solution, 0.25 ml of dibutyltin dilaurate and 0.561 grams of toluene-2,4-diisocyanate were added while stirring with a magnetic stirrer at ambient temperature and pressure. After 15 minutes, 0.145 grams of butane-1,4-diol was added causing the solution to become steadily more viscous. After another 30 minutes, the solution was poured into

20 methanol in a volume ratio of 1:5. The methanol was decanted off, and the precipitated polymer was washed three times with fresh methanol (1:5 volume ratio) to give a rubbery granular product with the properties set forth below:

$$M_n = 15404$$

$$M_w = 67277$$

$$25 \quad M_w/M_n = 4.37$$

EXAMPLE 5 (Random block copolymer of poly(3-azidomethyl-3-methyloxetane)

azidomethyl-3-methyloxetane) with a hydroxyl equivalent weight of 3040 and 3.5 grams of dry poly(3,3-bis(azidomethyl)oxetane) with a hydroxyl equivalent weight of 3235 were dissolved in 60 ml of dry 1,4-dioxane. The solution was concentrated and dried by evaporation of the 1,4-dioxane under reduced pressure via a rotovapor until 12 grams of the solvent remained. To this solution, 0.3 ml of dibutyltin dilaurate and 0.561 grams of toluene-2,4-diisocyanate were added while stirring with a magnetic stirrer at ambient temperature and pressure. After one hour, 0.145 grams of butane-1,4-diol was added causing the solution to become steadily more viscous. After another two hours, the solution was poured into methanol in a volume ratio of 1:5. The methanol was decanted off, and the precipitated polymer was washed three times with fresh methanol (1:5 volume ratio) to give a rubbery granular product with the properties set forth below:

Mn = 21230  
Mw = 116272  
Mw/Mn = 5.48

EXAMPLE 6 (Random block copolymer of poly(3-azidomethyl-3-methyloxetane) and poly(3,3-bis(azidomethyl)oxetane) in ethyl acetate)

In a 500 ml round bottom flask, 18 grams of dry difunctional poly(3-azidomethyl-3-methyloxetane) with a hydroxyl equivalent weight of 3356 and 6 grams of dry poly(3,3-bis(azidomethyl)oxetane) with a hydroxyl equivalent weight of 3235 were dissolved in 200 ml of dry ethyl acetate. The solution was concentrated and dried by evaporation of the ethyl acetate under reduced pressure via a rotovapor until 34 grams of the solvent remained. To this solution at 40°C, 0.024 grams of diphenyltin dichloride and 1.26 grams of toluene-2,4-diisocyanate were added while stirring with a magnetic stirrer. After one hour, 0.33 grams of butane-1,4-diol was added causing the solution to become steadily more viscous. After another 48 hours,

methanol (1:5 volume ratio) to give a rubbery granular product with the properties set forth below:

$M_n = 13880$

$M_w = 43310$

5  $M_w/M_n = 3.12$

EXAMPLE 7 (Random block copolymer of poly(3-azidomethyl-3-methyloxetane) and poly(3,3-bis(azidomethyl)oxetane) in THF)

In a 100 ml round bottom flask, 6.5 grams of dry difunctional poly(3-azidomethyl-3-methyloxetane) with a hydroxyl equivalent weight of 3040 and 3.5  
10 grams of dry poly(3,3-bis(azidomethyl)oxetane) with a hydroxyl equivalent weight of 3235 were dissolved in 70 ml of dry tetrahydrofuran. The solution was concentrated and dried by evaporation of the tetrahydrofuran under reduced pressure via a rotovapor at 50°C until 5 grams of the solvent remained. To this solution at 50°C, 0.5 ml of dibutyltin dilaurate and 0.561 grams of toluene-2,4-diisocyanate were added  
15 while stirring with a magnetic stirrer. After three minutes, 0.145 grams of butane-1,4-diol was added causing the solution to become steadily more viscous. After another five minutes, the solution was diluted with 20 ml of tetrahydrofuran and 1 ml of methanol. This solution was then precipitate in methanol in a volume ratio of 1:5. The methanol was decanted off, and the precipitated polymer was washed three times  
20 with fresh methanol (1:5 volume ratio) to give a rubbery granular product with the properties set forth below:

$M_n = 17350$

$M_w = 103231$

$M_w/M_n = 5.95$

25 EXAMPLE 8 (Random block copolymer of poly(azidomethyloxirane) and poly(3,3-bis(azidomethyl)oxetane))

solution 0.1 ml of dibutyltin dilaurate followed by 1.60 grams of butane-1,4-diol. This reaction mixture was stirred for 1 hour at room temperature.

In a separate 250 ml round bottom flask, 17.94 grams of dry difunctional poly(azidomethyloxirane) with a hydroxyl equivalent weight of 1174 and 6.63 grams of dry poly(3,3-bis(azidomethyl)oxetane) with a hydroxyl equivalent weight of 2390 were dissolved in 100 ml of dry tetrahydrofuran. The solution was concentrated and dried by evaporation of the tetrahydrofuran under reduced pressure via a rotovapor until 20 grams of the solvent remained. To this solution, 75 ml of dibutyltin dilaurate and 3.097 grams of toluene-2,4-diisocyanate were added while stirring with a magnetic stirrer at ambient temperature and pressure. After one hour, the urethane oligomer was added to this solution, causing the solution to become steadily more viscous. After 20 minutes, the solution was too viscous to stir and was diluted with 20 ml of dry tetrahydrofuran and allowed to react for a further 20 minutes before being poured into methanol in a volume ratio of 1:5. The methanol was decanted off, and the precipitated polymer was washed three times with fresh methanol (1:5 volume ratio) to give a rubbery granular product with the properties shown in FIGS. 1 and 2 and set forth below:

Mn = 26240  
Mw = 175500  
Mw/Mn = 6.69

Molecular weight distribution was determined by gel permeation chromatography using polystyrene standards, with the results shown in FIG. 1. The GPC trace in FIG. 1 demonstrates that the prepolymers were linked to produce a copolymer having a higher molecular weight and dispersivity than the homopolymer blocks. The DMA trace in FIG. 2 shows the melt transition of random block (BAMO-GAP)<sub>n</sub> at 75-80°C with a material modulus reducing only slowly before this

EXAMPLES 9-11 (Random block copolymer of poly(3-azidomethyl-3-methyloxetane) and poly(3,3-bis(azidomethyl)oxetane) linked with a urethane oligomer)

In a 500 ml round bottom flask, 45 grams of difunctional poly(3-azidomethyl-3-methyloxetane) with a hydroxyl equivalent weight of 3125 and 15 grams of poly(3,3-bis(azidomethyl)oxetane) with a hydroxyl equivalent weight of 3152 were dissolved in 300 ml of tetrahydrofuran. The solution was concentrated and dried by evaporation of the tetrahydrofuran or a rotovapor until a solution with 90 grams of solvent remained. To this solution 0.6 grams of dibutyltin dichloride and 3.34 grams of toluene-2,4-diisocyanate was added and the mixture allowed to react for 3 hours to end-cap the prepolymer.

For Example 9, 0.22 grams of butanediol was added to one quarter of the isocyanate end-capped prepolymer mixture. The reaction was allowed to continue for 14 hours before it was precipitated with methanol in a volume ratio of 1:5. The methanol was decanted off, and the precipitated polymer was washed three times with fresh methanol (1:5 volume ratio) to give a rubbery granular product.

For Example 10, a urethane oligomer was derived from a mixture of 2 ml of tetrahydrofuran, 0.42 grams of toluene-2,4-diisocyanate, 0.43 grams of butane-1,4-diol, and 0.1 grams of dibutyltin dichloride, which were allowed to react for one hours. The urethane oligomer was then added to one quarter of the isocyanate end-capped prepolymer mixture and allowed to react for 14 hours before it was precipitated with methanol in a volume ratio of 1:5. The methanol was decanted off, and the precipitated polymer was washed three times with fresh methanol (1:5 volume ratio) to give a rubbery granular product.

For Example 11, a urethane oligomer was derived from a mixture of 2 ml of

hours. The urethane oligomer was then added to one quarter of the isocyanate end-capped prepolymer mixture and allowed to react for 14 hours before it was precipitated with methanol in a volume ratio of 1:5. The methanol was decanted off, and the precipitated polymer was washed three times with fresh methanol (1:5 volume ratio) to give a rubbery granular product.

TABLE

	Example 9	Example 10	Example 11
diol:diisocyanate molar ratio	1:0	2:1	3:2
Mn	11440	12340	13240
Mw	134800	142000	122600
Mw/Mn	11.78	11.51	9.26
E <sup>1.0</sup>	520	669	823
$\epsilon_m$ (%)	311	897	536
$\epsilon_f$ (failure) (%)	372	1082	562
$\sigma_m$ (psi)	153	345	300
$\sigma_m$ (corrected) (psi)	678	3575	2381
ShoreA	49	60	65

The foregoing detailed description of the preferred embodiments of the invention has been provided for the purpose of explaining the principles of the invention and its practical application, thereby enabling others skilled in the art to understand the invention for various embodiments and with various modifications as are suited to the particular use contemplated. The foregoing detailed description is not intended to be exhaustive or to limit the invention to the precise embodiments disclosed. Modifications and equivalents will be apparent to practitioners skilled in this art and are encompassed within the spirit and scope of the appended claims.

## WHAT IS CLAIMED IS:

1. A method of preparing a thermoplastic elastomer having A blocks which are crystalline at temperatures below about 75°C and the B blocks which are amorphous at temperatures above about -20°C, the method comprising:

- 5 (a) dissolving the A blocks and B blocks terminated with respective isocyanate-reactive groups at approximately the stoichiometric ratios that are intended to be present in the thermoplastic elastomer into solution comprising at least one non-halogenated solvent, the A blocks being crystalline at temperatures below about 75°C and derived from monomers comprising at least one member selected from the group  
10 consisting of oxetane derivatives and tetrahydrofuran derivatives, the B blocks being amorphous at temperatures above about -20°C and derived from monomers comprising at least one member selected from the group consisting of oxetane and derivatives thereof, tetrahydrofuran and derivatives thereof, and oxirane and derivatives thereof;
- 15 (b) drying the dissolved A blocks and B blocks of water by azeotropic distillation of the non-halogenated solvent;
- (c) end-capping the dried A blocks and the dried B blocks in the non-halogenated solvent by reacting the dried A blocks and the dried B blocks with at least one diisocyanate in which a first isocyanate moiety thereof is substantially more  
20 reactive with the terminal groups of the blocks as a second isocyanate moiety thereof, whereby the more reactive first isocyanate moiety is capable of reacting with the terminal groups of the blocks, leaving the less reactive second isocyanate moiety free and unreacted; and
- (d) linking the end-capped A blocks and the end-capped B blocks together  
25 in the non-halogenated solvent with at least one linking compound comprising two isocyanate-reactive groups which are sufficiently sterically unhindered to react with

2. A method as defined in claim 1, wherein said dissolving step (a) comprises separately dissolving the A blocks and the B blocks into respective solutions.

3. A method as defined in claim 2, wherein said end-capping step (c) comprises separately end-capping the A blocks and the B blocks in the respective solutions.

4. A method as defined in claim 1, wherein said steps (a), (b), (c), and (d) are conducted in the absence of any halogenated solvent.

5. A method as defined in claim 1, wherein the non-halogenated solvent comprises one or more organic ethers.

6. A method as defined in claim 5, wherein the organic ether comprises one or more members selected from the group consisting of tetrahydrofuran, ethylene glycol dimethyl ether, and 1,4-dioxane.

7. A method as defined in claim 6, wherein the organic ether comprises tetrahydrofuran.

8. A method as defined in claim 1, wherein the non-halogenated solvent comprises one or more organic esters.

9. A method as defined in claim 8, wherein the organic ester comprises ethyl acetate.

10. A method as defined in claim 1, wherein the non-halogenated solvent comprises one or more organic ketones.

11. A method as defined in claim 10, wherein the organic ketone

12. A method as defined in claim 1, wherein the linking compound is derived from at least one diisocyanate and at least one difunctional urethane oligomer comprising two functional groups which are reactive with isocyanate moieties of the diisocyanate.

5 13. A method as defined in claim 1, wherein:

the first isocyanate moiety of the diisocyanate is at least five times more reactive with the terminal groups of each of the blocks as the second isocyanate moiety, whereby the more reactive first isocyanate moiety is capable of reacting with and end capping the terminal groups of the blocks, leaving the less reactive second  
10 isocyanate moiety free and unreacted; and

the linking compound has two isocyanate-reactive hydroxyl groups which are sufficiently sterically unhindered to be reactive with the free and unreacted second isocyanate groups of the end-capped blocks.

14. A method as defined in claim 1, wherein the diisocyanate comprises  
15 toluene diisocyanate.

15. A method as defined in claim 1, wherein the thermoplastic elastomer has a weight average molecular weight of at least 40,000 and a number average molecular weight of at least 10,000.

16. A method as defined in claim 1, wherein the thermoplastic elastomer  
20 has a weight average molecular weight of at least 60,000 and a number average molecular weight of at least 12,000.

17. A method as defined in claim 1, wherein the thermoplastic elastomer has a weight average molecular weight of at least 80,000 and a number average molecular weight of at least 15,000.

18. A method as defined in claim 1, wherein the isocyanate-reactive terminal groups of the A and B blocks are hydroxyl groups.

19. A method of making an energetic composite binder comprising:

- (a) dissolving the A blocks and B blocks terminated with respective  
5 isocyanate-reactive groups at approximately the stoichiometric ratios that are intended to be present in the thermoplastic elastomer into solution comprising at least one non-halogenated solvent, the A blocks being crystalline at temperatures below about 75°C and derived from monomers comprising at least one member selected from the group consisting of oxetane derivatives and tetrahydrofuran derivatives, the B blocks being  
10 amorphous at temperatures above about -20°C and derived from monomers comprising at least one member selected from the group consisting of oxetane and derivatives thereof, tetrahydrofuran and derivatives thereof, and oxirane and derivatives thereof;
- (b) drying the dissolved A blocks and B blocks of water by azeotropic  
15 distillation of the non-halogenated solvent;
- (c) end-capping the dried A blocks and the dried B blocks in the non-halogenated solvent by reacting the dried A blocks and the dried B blocks with at least one diisocyanate in which a first isocyanate moiety thereof is substantially more reactive with the terminal groups of the blocks as a second isocyanate moiety thereof,  
20 whereby the more reactive first isocyanate moiety is capable of reacting with the terminal groups of the blocks, leaving the less reactive second isocyanate moiety free and unreacted;
- (d) linking the end-capped A blocks and the end-capped B blocks together in the non-halogenated solvent with at least one linking compound comprising two  
25 isocyanate-reactive groups which are sufficiently sterically unhindered to react with the free and unreacted isocyanate moieties of the end-capped polymers; and

wt% of at least one solid selected from the group consisting of fuel material particulates and oxidizer particulates.

20. A method as defined in claim 19, wherein said dissolving step (a) comprises separately dissolving the A blocks and the B blocks into respective  
5 solutions.

21. A method as defined in claim 20, wherein said end-capping step (c) comprises separately end-capping the A blocks and the B blocks in the respective solutions.

22. A method as defined in claim 19, wherein said steps (a), (b), (c), and  
10 (d) are conducted in the absence of any halogenated solvent.

23. A method as defined in claim 19, wherein the non-halogenated solvent comprises one or more organic ethers.

24. A method as defined in claim 23, wherein the organic ether comprises one or more members selected from the group consisting of tetrahydrofuran, ethylene  
15 glycol dimethyl ether, and 1,4-dioxane.

25. A method as defined in claim 23, wherein the organic ether comprises tetrahydrofuran.

26. A method as defined in claim 19, wherein the non-halogenated solvent comprises one or more organic esters.

20 27. A method as defined in claim 26, wherein the organic ester comprises ethyl acetate.

28. A method as defined in claim 19, wherein the non-halogenated solvent

29. A method as defined in claim 28, wherein the organic ketone comprises methyl ethyl ketone.


30. A method of making a rocket motor propellant comprising making a binder as defined in claim 19.

5 31. A method of making a gun propellant comprising making a binder as defined in claim 19.

32. A method of making an explosive comprising making a binder as defined in claim 19.


10 33. A method of making a gasifier comprising making a binder as defined in claim 19.

09/831411

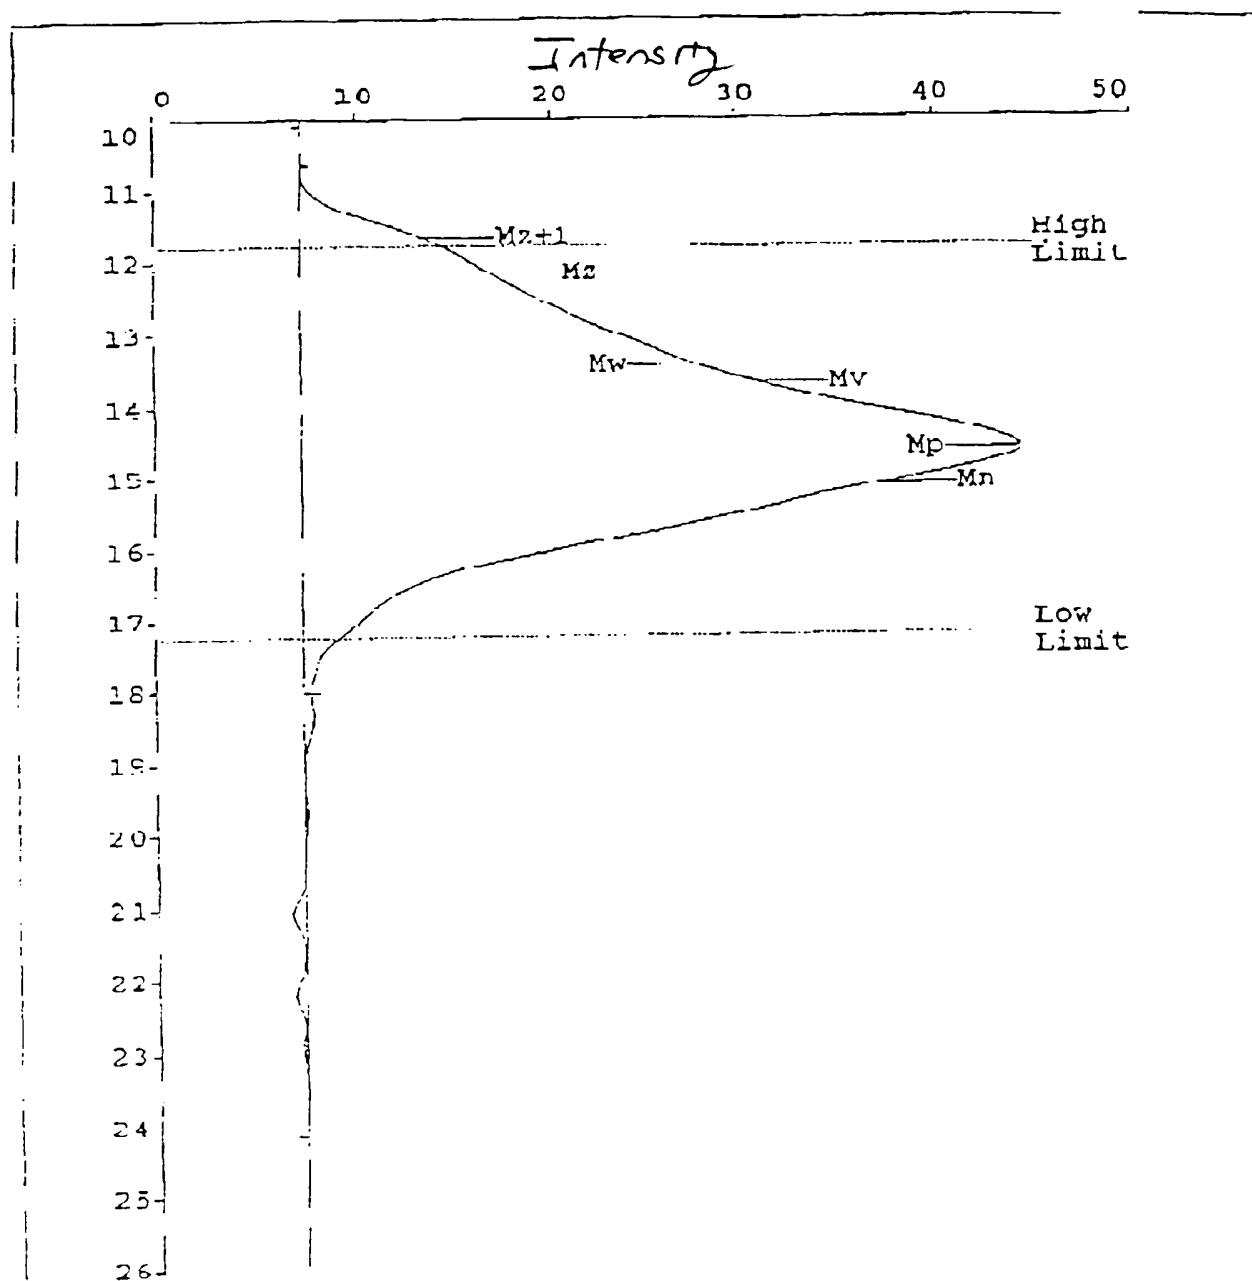

09/83141 r

25% BAMO-GAP : 1561/51 4/15/98

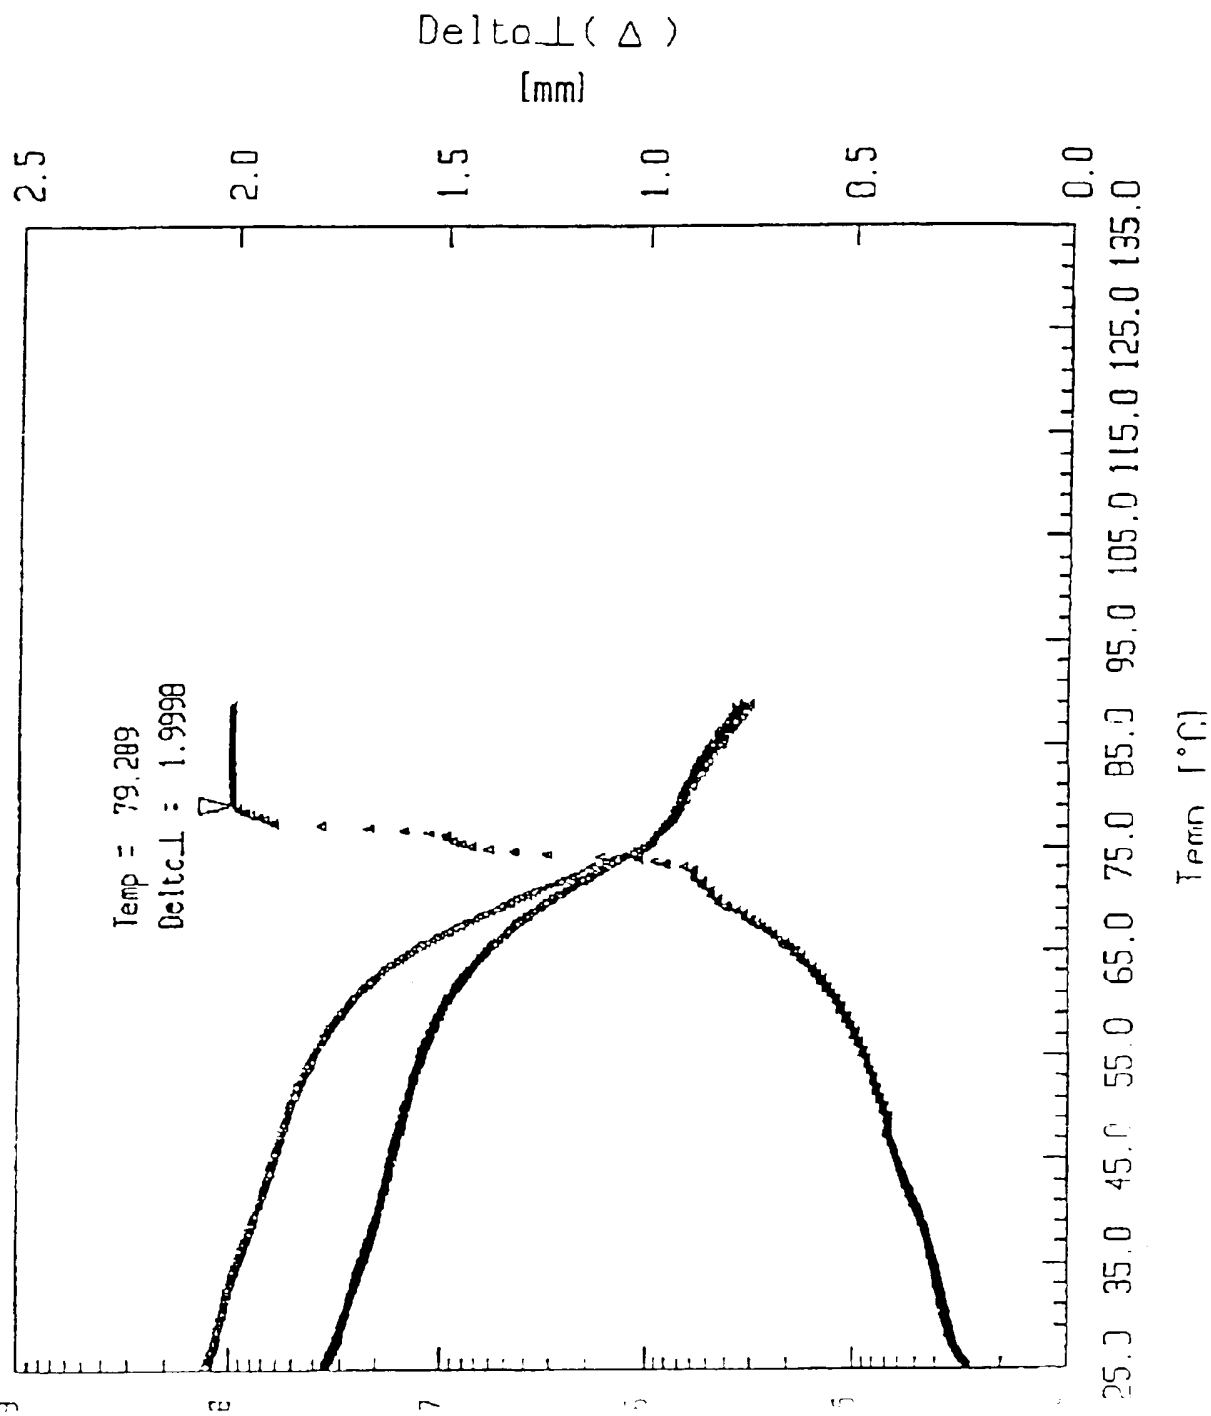

09/83141 1

JC08 Rec'd PCT/PTO 07 MAY 2001

**U.S. UTILITY PATENT  
APPLICATION OF**

**ANDREW J. SANDERSON,  
AND  
WAYNE W. EDWARDS**

**ENTITLED**


**"METHOD FOR THE SYNTHESIS OF  
ENERGETIC THERMOPLASTIC  
ELASTOMERS IN NON-HALOGENATED  
SOLVENTS"**

**FILED HERewith ON MAY 7, 2001**

Express Mail Label No. EL748290102US

Date of Deposit May 7, 2001

I hereby certify that the attached application is being deposited with the U.S. Postal Service "Express Mail Post Office to Addressee" service under 37 C.F.R. § 1.10 on the date indicated above and is addressed, BOX PATENT APPLICATION, Assistant Commissioner for Patents, U.S. Patent and Trademark Office, Washington, D.C. 20231.



Attorneys of Record:

Sullivan Law Group  
5060 North 40<sup>th</sup> Street, Suite 120  
Phoenix Arizona 85018-2140

CORRECTED VERSION

(19) World Intellectual Property Organization  
International Bureau(43) International Publication Date  
15 June 2000 (15.06.2000)

PCT

(10) International Publication Number  
WO 00/34353 A3(51) International Patent Classification<sup>7</sup>: C08G 18/08,  
18:76

(21) International Application Number: PCT/US99/24013

(22) International Filing Date:  
9 November 1999 (09.11.1999)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:  
60/108,455 12 November 1998 (12.11.1998) US(81) Designated States (*national*): AE, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CR, CU, CZ, DE, DK, DM, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZW.(84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).

## Published:

— With international search report.

(48) Date of publication of this corrected version:  
30 November 2000(15) Information about Correction:  
see PCT Gazette No. 48/2000 of 30 November 2000, Section II(71) Applicant (*for all designated States except US*): COR-  
DANT TECHNOLOGIES, INC. [US/US]; Suite 1600,  
15 West Temple, Salt Lake City, UT 84101-1532 (US).

(72) Inventors; and

(75) Inventors/Applicants (*for US only*): SANDERSON, An-  
drew, J. [GB/US]; 2711 North, Mountain Road, North Og-  
den, UT 84414 (US). EDWARDS, Wayne [US/US]; 600S  
610 West, Tremonton, UT 84337 (US).(74) Agents: COLTON, Kendrew, H. et al.; Pillsbury Madison  
& Sutro, LLP, 1100 New York Avenue, N.W., Washington,  
DC 20005 (US).*For two-letter codes and other abbreviations, refer to the "Guid-  
ance Notes on Codes and Abbreviations" appearing at the begin-  
ning of each regular issue of the PCT Gazette.*

(54) Title: METHOD FOR THE SYNTHESIS OF ENERGETIC THERMOPLASTIC ELASTOMERS IN NON-HALOGENATED

derivatives and/or tetrahydrofuran derivatives. The B blocks are derived from oxetanes, tetrahydrofuran, oxiranes, and derivatives thereof. The A blocks and B blocks are dissolved into solution containing a non-halogenated solvent, preferably tetrahydrofuran. The dissolved A blocks and B blocks are dried of water by azeotropic distillation of the non-halogenated solvent. Next, the dried A blocks and the dried B blocks are end-capped with a diisocyanate having one isocyanate moiety substantially more reactive with the hydroxyl groups of the A blocks than the other isocyanate moiety, thereby forming A blocks with one free and one reacted isocyanate group and B blocks with two free isocyanate groups. The end-capped A blocks and the end-capped B blocks are linked together with a linking compound having two isocyanate-reactive groups which are sufficiently unimpeded to react with the free and unreacted isocyanate moieties of the end-capped polymers.

WO 00/34353

2/PRTS

## METHOD FOR THE SYNTHESIS OF ENERGETIC THERMOPLASTIC ELASTOMERS IN NON-HALOGENATED SOLVENTS

### BACKGROUND OF THE INVENTION

5

#### 1. Field of the Invention

This invention relates to a method of synthesizing energetic thermoplastic elastomers which are useful as binders of high energy compositions, such as rocket motor propellants, gun propellants, explosive munitions, gas generants of vehicle supplemental restraint systems, or the like.

10

#### 2. Description of the Related Art

Solid high energy compositions, such as propellants, explosives, gas generants, and the like comprise solid particulates, such as fuel particulates and/or oxidizer particulates, dispersed and immobilized throughout a polymeric binder matrix.

15

Conventional solid composite propellant binders utilize cross-linked elastomers in which prepolymers are cross-linked by chemical curing agents. As outlined in detail in U.S. Patent No. 4,361,526, there are important disadvantages to using cross-linked elastomers as binders. Cross-linked elastomers must be cast within a short period of time after addition of the curative, which time period is known as the "pot life". Disposal of a cast, cross-linked propellant composition is difficult, and usually is accomplished by burning, which poses environmental problems. Furthermore, current state-of-the-art propellant compositions have serious problems that include their use of nonenergetic binders which have lower performance and high end-of-mix viscosities.

20

In view of the inherent disadvantages associated with the use of cross-linked elastomeric polymer binder materials, there has been considerable interest in

compositions of energetic thermoplastic elastomers which are important requirements expected of propellant formulations, particularly the requirement of

30

being processible below about 120°C, it being desirable that a thermoplastic elastomeric polymer for use as a binder in a high energy system have a melting temperature of between about 60°C and about 120°C. The melting temperature is desirably at least about 60°C because the propellant composition may be subject to

5 somewhat elevated temperatures during storage and transport, and significant softening of the propellant composition at such elevated temperatures is unwanted. The setting of the melting temperature at not more than about 120°C is determined by the instability, at elevated temperatures, of many components which ordinarily go into high energy compositions, particularly oxidizer particulates and energetic plasticizers.

10 Many thermoplastic elastomers exhibit high melt viscosities which preclude high solids loading and many show considerable creep and/or shrinkage after processing. Thermoplastic elastomers typically obtain their thermoplastic properties from segments that form glassy domains which may contribute to physical properties adverse to their use as binders. Crosslinkable thermoplastic elastomers are block

15 copolymers with the property of forming physical cross-links at predetermined temperatures. One thermoplastic elastomer, e.g., Kraton, brand TPE, obtains this property by having the glass transition point of one component block above room temperature. At temperatures below 109°C, the glassy blocks of Kraton form glassy domains and thus physically cross-link the amorphous segments. The strength of

20 these elastomers depends upon the degree of phase separation. Thus, it remains desirable to have controlled, but significant, immiscibility between the two types of blocks, which is a function of their chemical structure and molecular weight. On the other hand, as the blocks become more immiscible, the melt viscosity increases, thus having a deleterious effect on the processibility of the material.

25 Above-mentioned U.S. Patent No. 4,361,526 proposes a thermoplastic elastomeric binder which is a block copolymer of a diene and styrene, the styrene

ELASTOMERIC BINDER FOR HIGH ENERGY SYSTEMS

processed with a volatile organic solvent. Solvent processing is undesirable inasmuch as the dissolved composition cannot be cast in a conventional manner, e.g., into a rocket motor casing. Furthermore, solvent-based processing presents problems with respect to removal and recovery of solvent.

5           The preparation of energetic thermoplastic elastomers prepared from polyoxetane block copolymers has been proposed in U.S. Patent No. 4,483,978 to Manser and U.S. Patent No. 4,806,613 to Wardle ("the '613 patent"), the complete disclosures of which are incorporated herein by reference to the extent that these disclosures are compatible with this invention. According to the latter, these materials  
10       overcome the disadvantages associated with conventional cross-linked elastomers such as limited pot-life, high end-of-mix viscosity, and scrap disposal problems.

          The thermoplastic materials proposed by the '613 patent involve elastomers having both (A) and (B) blocks, each derived from cyclic ethers, such as oxetane and oxetane derivatives and tetrahydrofuran (THF) and tetrahydrofuran derivatives. The  
15       monomer or combination of monomers of the (A) blocks are selected for providing a crystalline structure at usual ambient temperatures, such as below about 60°C, whereas the monomer or combination of monomers of the (B) blocks are selected to ensure an amorphous structure at usual ambient temperatures, such as above about -20°C. Typical of these materials is the random block copolymer (poly(3-  
20       azidomethyl-3-methyloxetane)-poly(3,3-bis(azidomethyl)oxetane), also known as poly(AMMO/BAMO). These block copolymers have good energetic and mechanical properties. Additionally, the block copolymers can be processed without solvents to serve as binders in high performance, reduced vulnerability explosive, propellant, and gas generant formulations. Advantageously, the block copolymers exhibit good  
25       compatibility with most materials used in such energetic formulations.

drawbacks have been associated with the use of the halogenated solvents disclosed in the '978 and '613 patents. One drawback is the detrimental impact that halogenated solvents have on the environment. Another drawback of halogenated solvents is attributable to the additional drying steps which the pre-polymer blocks are subject to after their formation. The pre-polymer blocks are typically dried either with chemical drying agent, e.g., desiccants followed by filtration or by the azeotropic removal of water. The azeotropic removal of water is performed with toluene, which is different from the solvent selected for linking the pre-polymer blocks. The performance of an additional drying step and the use of different solvents in the azeotropic drying step and the linking step complicates processing and increases overall processing time. Moreover, toluene does not completely dissolve the end-capped blocks prior to the linking reaction and can interfere with the end-capping and linking catalysts. Yet another drawback associated with halogenated solvents is the relatively low concentrations of pre-polymer blocks and linking compounds that may be loaded in halogenated solvents for processing. The loading of the thermoplastic elastomer ingredients is limited by the solubility of the ingredients in the solvent. For example, the currently used process for forming thermoplastic elastomers by linking energetic polyether diols and diisocyanates typically use approximately 30-40% by weight solutions of the reactants in dichloromethane and 0.1% by weight tin catalyst. Additionally, completion of the reaction in halogenated solvents typically takes several days to a week.

United States Patent No. 4,393,199 to Manser describes the use of a non-halogenated solvent, nitromethane, during cationic polymerization of cyclic ethers. However, it has been found that cyclic ether pre-polymer blocks are not sufficiently soluble in nitromethane to adequately link the pre-polymer blocks once they are formed.

drawbacks associated with halogenated solvents while reducing processing time and increasing productivity.

### SUMMARY OF THE INVENTION

It is, therefore, an object of this invention to provide a method for the  
5 synthesis of energetic thermoplastic elastomers that addresses the aforementioned problems associated with the related art and realizes the advancement expressed above.

In accordance with the principles of this invention, these and other objects are attained by a method of synthesizing an energetic thermoplastic elastomer binder that  
10 is in a solid state at room temperature and is derived from A blocks which are crystalline at temperatures below about 60°C and B blocks are amorphous at temperatures above about -20°C. The A blocks may include one or more polyethers derived from monomers of oxetane derivatives and/or tetrahydrofuran derivatives. The B blocks may include one or more polyethers derived from monomers of oxetane  
15 and its derivatives, tetrahydrofuran and its derivatives, and/or oxirane and its derivatives. The polyoxetane blocks A and polyoxirane blocks B may be linked by end-capping the blocks with diisocyanates and linking the end-capped blocks with difunctional linking chemicals in which each of the two terminal functional groups are reactive with an isocyanate moiety of the diisocyanate.

20 In accordance with one embodiment of this method, the A and B blocks are dissolved into solution comprising one or more non-halogenated solvents. The solvent or solvents selected preferably are capable of dissolving more than 25% by weight of the blocks (based on total weight of the solvents and blocks) into solution, more preferably at least 35% by weight into solution, and still more preferably 50%

and ketones. Tetrahydrofuran is the preferred solvent because of its excellent solubility. The A and B blocks are mixed together at approximately the stoichiometric ratios that the blocks are intended to be present in the energetic thermoplastic elastomer. The solution is then dried by azeotropic removal of water with excess solvent. The A and B blocks are end-capped in the solvent with one or more diisocyanates. The end-capping may be performed prior or subsequent to the mixing step, but subsequent to the drying step. The diisocyanate preferably has one isocyanate moiety which is more reactive, preferably at least about five times as reactive, with the terminal hydroxyl group of each of the blocks than the other isocyanate moiety, whereby the more reactive isocyanate moiety tends to react with the terminal-hydroxyl groups of the blocks, leaving the less reactive isocyanate moiety free and unreactive. The mixture is reacted with a chain extender having two isocyanate-reactive groups that are sufficiently unhindered to react with the free and unreacted isocyanate groups of the end-capped blocks. In this manner, the end-capped blocks are linked, but not crosslinked, to form a thermoplastic elastomer.

It is still a further object of this invention to provide a method for making propellants, especially rocket propellants and gun propellants, explosives, gas generants, or the like containing an energetic thermoplastic elastomer binder by procedures including the above-discussed method.

These and other objects, features, and advantages of the present invention will become apparent from the accompanying drawings and following detailed description which illustrate and explain, by way of example, the principles of this invention.

#### BRIEF DESCRIPTION OF THE DRAWINGS


The accompanying drawings are provided to facilitate an understanding of the principles of this invention. In such drawings, FIGS. 1 and 2 are graphs showing the

## DETAILED DESCRIPTION OF THE INVENTION

The thermoplastic elastomer  $(AB)_n$  polymers of this invention include A blocks which are crystalline at temperatures below about  $60^\circ\text{C}$ , preferably at temperatures below about  $75^\circ\text{C}$ , and B blocks which are amorphous at temperatures  
5 down to about  $-20^\circ\text{C}$ . Each of the A and B blocks are polyethers derived from cyclic ethers. Specifically, the A blocks are derived from monomers of oxetane derivatives and/or THF derivatives. The B blocks are derived from monomers of oxetane and its derivatives, THF and its derivatives, and/or monomers of oxirane and its derivatives, preferably energetic oxirane derivatives. The polymers melt at temperatures between  
10 about  $60^\circ\text{C}$  and about  $120^\circ\text{C}$ , and more preferably between about  $75^\circ\text{C}$  and about  $100^\circ\text{C}$ . The A and B blocks are mutually miscible in the melt. Consequently, the melt viscosity of the block copolymer decreases rapidly as the temperature is raised above the melting point, whereby high energy formulations may include high solids content, e.g., up to about 95% by weight of solid particulates, and can be easily  
15 processed. The invention also includes other thermoplastic elastomer block structures, such as ABA tri-block polymers and  $A_nB$  star polymers. Contributing to the miscibility of the A and B blocks is their similar chemical structure.

Oxetane monomer units that may be used in forming the A and B blocks of the present invention have the general formula:

20

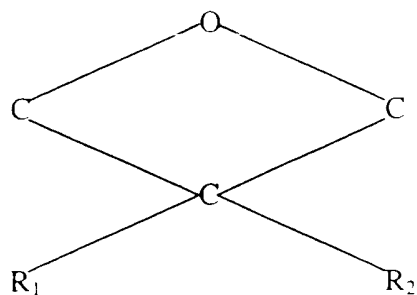


wherein the  $R_1$  and  $R_2$  groups are the same or different and are selected from moieties having the general formula:  $-(CH_2)_nX$ , where  $n$  is 0-10 and  $X$  is selected from the group consisting of -H, -NO<sub>2</sub>, -CN, -Cl, -F, -O-alkyl, -OH, -I, -ONO<sub>2</sub>, -N(NO<sub>2</sub>)-alkyl, -C≡CH, -Br, -CH=CH(H or alkyl), -CO<sub>2</sub>-(H or alkyl), -N(H or alkyl)<sub>2</sub>,  
 5 -O-(CH<sub>2</sub>)<sub>1.5</sub>-O-(CH<sub>2</sub>)<sub>0.8</sub>-CH<sub>3</sub>, and N<sub>3</sub>.

Examples of oxetane derivatives that may be used in forming the A blocks in accordance with this invention are generally symmetrically-substituted oxetanes including, but are not limited to, the following: BEMO (3,3-bis(ethoxymethyl)oxetane), BCMO (3,3-bis(chloromethyl)oxetane), BMMO (3,3-bis(methoxymethyl)oxetane), BFMO (3,3-bis(fluoromethyl)oxetane), BAOMO (3,3-bis(acetoxymethyl)oxetane), BHMO (3,3-bis(hydroxymethyl)oxetane), BMEMO (3,3-bis(methoxyethoxymethyl)oxetane), BIMO (3,3-bis(iodomethyl)oxetane), BNMO (3,3-bis(nitratomethyl)oxetane), BMNAMO (3,3-bis(methylnitraminomethyl)oxetane), and BAMO (3,3-bis(azidomethyl)oxetane).


15 Examples of oxetanes derivatives that may be used in forming the B blocks in accordance with this invention are generally unsymmetrically-substituted oxetanes including, but are not limited to, the following: HMMO (3-hydroxymethyl-3-methyloxetane), OMMO (3-octoxymethyl-3-methyloxetane), CMMO (3-chloromethyl-3-methyloxetane), AMMO (3-azidomethyl-3-methyloxetane), IMMO (3-iodomethyl-3-methyloxetane), PMMO (3-propynomethylmethyloxetane), NMMO (3-nitratomethyl-3-methyloxetane), and MNAMMO (3-methylnitraminomethyl-3-methyloxetane).

Tetrahydrofuran monomer units that may be used in forming the blocks of the present invention have the general formula:

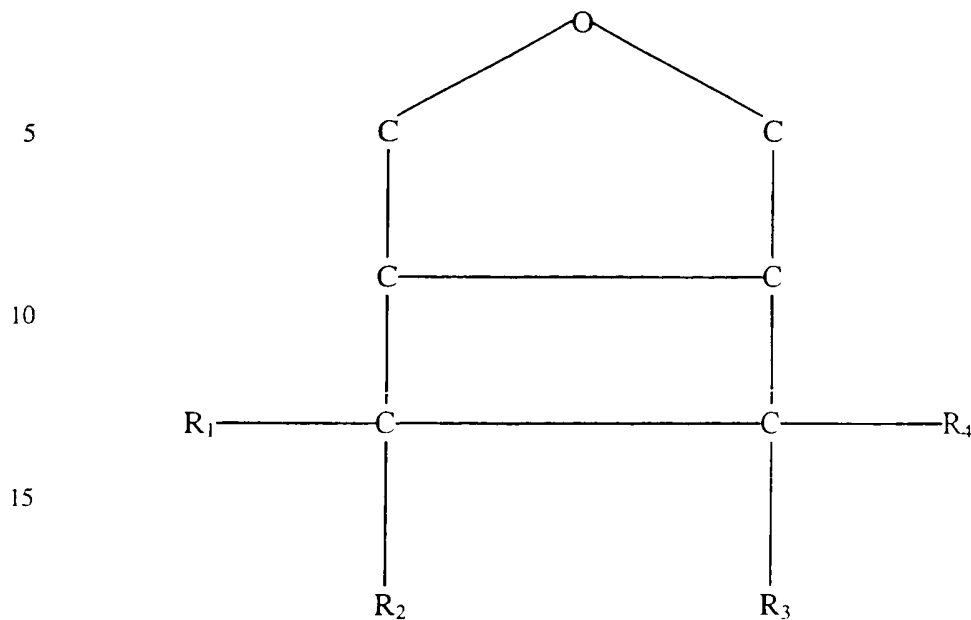

20 wherein the  $R_1$ - $R_4$  groups are the same or different and are selected from moieties set forth above in connection with the description of suitable oxetane derivatives.

Oxirane monomer units used in forming the B blocks of the present invention have the general formula:

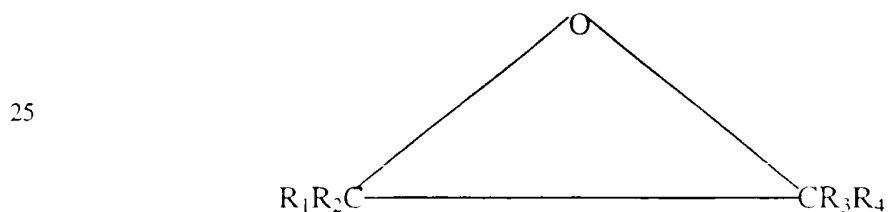

wherein  $R_1$  and  $R_3$  are independently selected from hydrogen and methyl, and  $R_2$  and  $R_4$  are independently selected from hydrogen, alkyl containing from 1 to 10 carbon atoms, chloroalkyl and bromoalkyl containing 1 to 2 carbon atoms, and nitratoalkyl.

fluoronitroalkyl, and fluoronitroalkoxyalkyl containing 1 to 5 carbon atoms provided that at least one of  $R_1$  to  $R_4$  is not hydrogen.

Examples of energetic oxiranes that may be used in forming the B blocks in accordance with this invention include, but are not limited to glycidyl azide polymers (C<sub>3</sub>H<sub>5</sub>N<sub>3</sub>O) (GAP), especially difunctional GAP, and poly(glycidyl nitrate) (C<sub>3</sub>H<sub>5</sub>NO<sub>4</sub>) (PGN). These polymers have a glass transition temperature below about -20°C and are amorphous at temperatures above -20°C.

Forming thermoplastic elastomers in accordance with the invention involves (1) formation of at least one polyether-derived homopolymer, copolymer, or terpolymer serving as the A blocks and crystalline in nature with a relatively elevated melting point, i.e., between about 60°C and about 120°C, preferably near 80°C and (2) formation of at least one polyether-derived homopolymer, copolymer, or terpolymer serving as the B blocks and amorphous in structure with a glass transition temperature ( $T_g$ ) below about -20°C.

The selection of the A block may be made based on the properties desired for the intended application of the thermoplastic elastomer. Examples of preferred crystalline A blocks include blocks possessing high energy density, such as those formed from BAMO and/or BMNAMO monomers. Melting temperature and ether oxygen content are additional factors that may be taken into consideration in selecting the monomers.

The properties of the block polymer depends upon the molecular weights of the individual blocks and the total molecular weights. Typically the A blocks have number average molecular weights ranging from about 3000 to about 8000, whereas the B blocks have number average molecular weights ranging from about 3000 to

15:85 to about 40:60. The preferred sizes of the A and B blocks for any particular binder application may be empirically determined.

The thermoplastic elastomers of this invention preferably are in a solid state at room temperature, have a weight average molecular weight of at least 40,000, more  
5 preferably at least 60,000, still more preferably at least 80,000, and a number average molecular weight of at least 10,000, more preferably at least 12,000, still more preferably at least 15,000.

Thermoplastic elastomers produced in accordance with the present invention may be admixed with other components of a high energy formulation, such as a  
10 propellant formulation. The binder system, in addition to the thermoplastic elastomers, may optionally contain one or more plasticizers for improving the resistance of the thermoplastic elastomer to hardening at low temperatures, which may be included at a plasticizer-to-thermoplastic elastomer weight ratio of up to about 1:1. Suitable high energy plasticizers include glycidyl azide polymer (GAP),  
15 nitroglycerine, butanetriol trinitrate (BTTN), alkyl nitratomethyl nitramines, trimethylolethane trinitrate (TMETN), diethylene glycol dinitrate, triethylene glycol dinitrate (TEGDN), bis(dinitropropylacetal/-bis(dinitropropyl)formal (BDNPA/F), and mixtures thereof. Inert plasticizers can also be used. Representative inert plasticizers include, by way of example, dioctyladipate (DOA), isodecylperlargonate  
20 (IDP), dioctylphthalate (DOP), dioctylmaleate (DOM), dibutylphthalate (DBP), oleyl nitrile, triacetin, and combinations thereof. The binder system may also contain a minor amount of a wetting agent or lubricant that enables higher solids loading.

The solids content of the high energy composition generally ranges from about 50 wt% to about 95 wt%, higher solids loading generally being preferred so long as  
25 such loading is consistent with structural integrity. The solids include fuel material

aluminum, magnesium, boron, and beryllium. Representative oxidizers and co-oxidizers include ammonium perchlorate; hydroxylammonium nitrate (HAN); ammonium dinitramide (ADN); hydrazinium nitroformate; ammonium nitrate; nitramines such as cyclotetramethylene tetranitramine (HMX) and cyclotrimethylene trinitramine (RDX), 2,4,6,8,10,12-hexanitro-2,4,6,8,10,12-  
5 hexaazatetracyclo[5.5.0.0<sup>5,9</sup>.0<sup>3,11</sup>]-dodecane or 2,4,6,8,10,12-hexanitrohexaazaisowurtzitane (CL-20 or HNIW), and/or 4,10-dinitro-2,6,8,12-tetraoxa-4,10-diazatetracyclo[5.5.0.0<sup>5,9</sup>.0<sup>3,11</sup>]dodecane (TEX), and any combination thereof. In addition, the high energy composition may include minor amounts of  
10 additional components known in the art, such as bonding agents, burn rate modifiers, ballistic modifiers (e.g., lead), etc.

The thermoplastic elastomer may be mixed with the solids and other components of high energy formulation at temperatures above its melting temperature. Blending may be done in conventional mixing apparatus. Because of  
15 the low viscosities of the molten polymer, no solvents are required for blending or other processing, such as extrusion.

An important advantage of having a binder which is meltable is that the elastomer from an outdated device containing can be melted down and reused. At the time of such remelting, the binder might be reformulated, e.g., by addition of  
20 additional fuel or oxidizer particulates. Accordingly, the thermoplastic elastomer provides for its eventual recycle, as opposed to the burning required for disposal of cross-linked compositions. Because the "pot life" of the thermoplastic propellant exceeds that which would reasonably be required of a propellant or explosive formulation, if any problems develop during casting, the process can be delayed as  
25 long as is reasonably necessary, merely by maintaining the formulation in a molten state.

The oxetane homopolymer blocks may be formed according to the cationic polymerization technique taught by Manser in U.S. Patent No. 4,393,199, the complete disclosure of which is incorporated herein by reference. The oxirane homopolymer blocks may be formed according to the technique taught in U.S. Patent  
5 No. 5,120,827, the complete disclosure of which is incorporated herein by reference. The technique employs an adduct of a substance such as a diol, e.g., 1,4-butane diol (BDO), and a catalyst for cationic polymerization, e.g.,  $\text{BF}_3$ -etherate. This adduct forms with the oxetane monomer an initiating species which undergoes chain extension until n moles of monomer have been incorporated in the molecule, n being  
10 the ratio of monomers to adduct present. By adjusting the ratio of monomers to adduct present, the average molecular weight of the polymer which forms may be adjusted. If two or more monomers are present, incorporation of the monomers will be generally random but may depend upon the relative reactivities of the monomers in the polymerization reaction.

15 Another suitable catalyst system includes co-catalytically effective quantities of one or more triethoxonium salts and one or more alcohols, as disclosed in U.S. Application No. 08/233,219, the complete disclosure of which is incorporated herein by reference to the extent that the disclosure is compatible with this invention. Examples of triethoxonium salts include triethoxonium hexafluorophosphate,  
20 triethoxonium hexafluoroantimonate, and triethoxonium tetrafluoroborate.

It is understood that although the isocyanate-reactive terminal functional groups of the blocks are referred to herein as being hydroxyl groups, the isocyanate-reactive functional groups may also be amines, amides, and/or carboxyl groups.

The crystalline polyoxetane A blocks and amorphous B blocks, i.e., the  
25 respective prepolymers, are each end-capped together or separately with one or more

sufficiently unhindered to allow them to react with the free isocyanate moieties of the end-capped copolymers and thereby join the blocks together.

Oxetane, THF, and oxirane polymer blocks normally have terminal isocyanate-reactive (e.g., hydroxyl) functions which are end-capped with the diisocyanates in accordance with the invention. Preferably, a first one the isocyanate moieties of the end-capping compound is substantially more reactive with the terminal-hydroxyl moieties of the polymer blocks than the other (e.g., second) isocyanate moiety. One of the problems with linking these types of polymer blocks is that substituted oxetane-derived hydroxyl end groups units have neopentyl structures, whereby the terminal primary hydroxyl moieties are substantially hindered and therefore less reactive. The blocks derived from the oxirane derivatives are secondary alcohols, making their hydroxyl groups less reactive than the primary hydroxyl group of the oxetane-derived A-block. The diisocyanate preferably is selected so that one of the isocyanate groups is capable of reacting with a hydroxyl-group of the polymer blocks while the other isocyanate moiety remains free and unreacted. Diisocyanates are preferably used because isocyanates of higher functionality would result in undesirable levels of cross-linking. The different reactivities of the isocyanate moieties is desirable to ensure that substantial chain extension through linking of like blocks does not occur. Thus, for purposes of this invention, one isocyanate moiety of the diisocyanate should preferably be approximately five times more reactive with terminal hydroxyl groups of oxetane and oxirane blocks than the other group. Preferably one isocyanate moiety is at least about ten times more reactive than the other.

One diisocyanate which is especially useful for purposes of the invention is 2,4-toluene diisocyanate (TDI) in which the isocyanate moiety in the 4-position is

more reactive than the isocyanate moiety in the 2-position.

The application of the invention to the preparation of a polymer is described below.

not worked well include diphenylmethylene diisocyanate (MDI) and hexamethylene diisocyanate (HDI).

In the end-capping reaction, the diisocyanate is used at an approximately stoichiometric molar amount relative to terminal hydroxyl groups on the polymer chain. Thus, if the polymer chain has a pair of terminal hydroxyl groups, approximately two molar equivalents, e.g., 1.75-2.2 molar equivalents of diisocyanate are used. In the ideal reaction, all of the more reactive isocyanate moieties would react with terminal hydroxyl groups, leaving all of the less reactive isocyanate moieties free. Practically, not all of the diisocyanate reacts in this manner, and some chain extension does occur. Thus, the end-capping reaction may be maximized for particular polymer chains by some adjustment in the relative molar ratios of polymer block and diisocyanate.

In one variant embodiment, the A blocks and B blocks are reacted separately with the diisocyanate, so that there is no competition of the blocks for diisocyanate molecules and each separate end-capping reaction may be carried to substantial completion. The diisocyanate may react more rapidly with one block than the other, but this difference can be compensated for by a longer reaction time with the slower reacting block. The reactivity of the terminal hydroxyl groups varies according to steric factors and also according to side-chain moieties. Energetic oxetanes, for example, generally have side-chain moieties that are electron-withdrawing, making their terminal hydroxyl groups less reactive. Once end capped with diisocyanate, the reactivities of the polymers for linking purposes is essentially dependent only upon the reactivity of the free isocyanate, not on the chemical makeup of the polymer chain itself. Thus end-capped (A) blocks are substantially as reactive as end-capped (B) blocks.

preferably two labile groups, such as chloride or acetate, bound directly to the tin. Suitable tin catalyst include diphenyl tin dichloride, dibutyl tin dichloride, dibutyl tin dilaurate, dibutyl tin diacetate. Tertiary amine catalysts may also be used.

The linking compound is one which has two functional groups which are  
5 sufficiently unhindered to react with the free isocyanate moieties on the end-capped blocks so as to link A blocks to B blocks, A blocks to A blocks, and B blocks to B blocks in a urethane reaction. Preferred functional groups are hydroxyl groups, although amine, amide, and carboxyl groups, and mixtures thereof also react in a urethane reaction. Primary functional groups are preferred. The linking compound  
10 may be a short, straight carbon chain having terminal hydroxyl groups, e.g., 1,4-butanediol, 1,3-propanediol, ethylene glycol, and 1,6-hexanediol. The linking compound should also be miscible with and rapidly dissolve in the non-halogenated solvent so as to ensure chain extension without unwanted amounts of cross-linking.

Alternatively, the linking compound may be an oligomer, especially a  
15 urethane oligomer, having two functional groups which are sufficiently unhindered to react with the free isocyanate moieties on the end-capped blocks so as to link A blocks to B blocks, A blocks to A blocks, and B blocks to B blocks via a urethane reaction. Preferred functional groups of the oligomer are hydroxyl groups, although amine, amide, and carboxyl groups, and mixtures thereof also react in a urethane  
20 reaction. Primary functional groups are preferred.

An oligomeric glycol containing urethane moieties is preferably used to react the free isocyanate moieties on the end-capped blocks. The oligomeric glycol may be prepared from a mixture of one or more diisocyanates and an excess amount of one or more diols. The diisocyanate(s) and diol(s) selected and the ratio of these reagents  
25 may be varied to tailor the properties of the thermoplastic elastomer. The diol-to-

linking of the isocyanate-capped prepolymers, and improve the thermomechanical properties of the final thermoplastic elastomer. A suitable urethane reaction catalyst promotes the reaction between the diisocyanate(s) and diol(s) to form oligomers. The catalysts discussed above in connection with the linking of the A and B blocks are suitable for this purpose. Representative diols that may be selected for preparing the difunctional oligomer include, by way of example, unbranched aliphatic diols having 2 to 7 carbon atoms, such as ethylene glycol, propylene glycol, butylene glycol; and cycloaliphatic diols such as 1,4-cyclohexanedimethanol, and any combination thereof. Representative diisocyanates for preparing the difunctional oligomer include, by way of example, aliphatic diisocyanates such as hexane diisocyanate, and aryl diisocyanates such as methylene-bis(4-phenyl isocyanate), phenylene diisocyanate, toluene diisocyanate, and xylylene diisocyanate, and any combination thereof. Preferably, the difunctional oligomer has a number average molecular weight  $M_n$  of from 350 to 900.

It is to be appreciated that a wide variety of difunctional compounds maybe used to link the end-capped blocks.

As in the end-capping reaction, some solvent is preferably used, as is a catalyst, such as described above. Conveniently, the reaction mixtures of the A blocks and B blocks may be mixed together without prior separation of the blocks from their respective end-capping reaction mixtures. The linking compound can be added directly to this mixture of A and B blocks. The catalyst is thereby already present when the linking compound is added.

The linking compound is added in an amount such that the total number of linking-compound functional groups approximately equals the total number of free isocyanate groups of the end-capped polymer blocks. Thus, to provide an  $(AB)_n$

molar ratio is in the range of 0.9-1.1, e.g., 1.0. Accordingly, optimal molar ratios of blocks and linking chemicals may have to be empirically determined.

The end-capping reaction and linking reaction are carried out in a suitable non-halogenated solvent, e.g., one which dissolves the polymer and does not react with the free isocyanate moieties. Although insubstantial amounts of halogenated solvent may be present, the solution is preferably completely free of any halogenated solvent. The non-halogenated solvent should not react in the urethane reaction and forms an azeotrope with water. Suitable dry solvents include cyclic ethers such as tetrahydrofuran (THF) and 1,4-dioxane; non-cyclic ethers such as ethylene glycol dimethyl ether; ketones such as methyl ethyl ketone ("MEK"); and esters such as ethyl acetate. Of these, THF is preferred because of its excellent solubility characteristics.

In a preferred embodiment, the solvent forms an azeotrope with water. In this preferred embodiment, after the blocks are dissolved in excess non-halogenated solvent, the solution may be dried by azeotropic distillation of the solvent, and optionally further concentrated, e.g., via distillation, in the solution to increase the volumetric loading and reaction rate. The blocks then may be end-capped, separately or together, and linked in the same or a different non-halogenated solvent. By distilling off excess solvent to remove water, subsequent reaction with a diisocyanate may proceed without significant interference from competing reactions between the isocyanate moieties and water. Additionally, the solution remains homogeneous and further distillation serves to concentrate the polymer solution, producing higher reaction rates and requiring less reactor capacity. The reaction rates may be improved by conducting the end-capping reaction at elevated temperatures, such as 30°C to 80°C, more preferably 40°C to 60°C. The process may be conducted by a batch or continuous method. For example, the prepolymer and catalyst solution may be

extruder and energetic thermoplastic elastomer is continuously produced for processing.

In the end-capping and block linking steps, the reaction can be followed with NMR and IR. With NMR, the urethane-forming reaction can be followed through the methylene groups on the polymer adjacent to the terminal hydroxyl groups. With IR, the change from isocyanate to urethane can be directly followed.

Synthesis of polyoxetanes is described in U.S. Patent Nos. 4,483,978 and 4,806,613, the complete disclosures of which are incorporated herein by reference to the extent that these disclosures are compatible with the present invention.

The invention will now be described in greater detail by way of the following examples, which are not to be construed as exhaustive as to the scope of this invention.

As referred to herein, "dry" means that less than 1 wt% water was present.

For the following experiments, poly(azidomethyloxirane) was supplied by 3M Speciality Chemicals of St. Paul, MN (Lot L-12564). Unless otherwise specified, all other materials were obtained from Aldrich of Milwaukee, WI.

#### EXAMPLE 1 (poly(3,3-bis(azidomethyl)oxetane))

A 5 liter jacketed flask equipped with a mechanical stirrer was charged with 600 grams of tribromoneopentylalcohol (AmeriBrom, Inc. of New York), 1200 ml of toluene, and 6 grams of tetrabutylammonium bromide. The mixture was cooled to 12°C and 193 grams of sodium hydroxide was added dropwise as a 40 wt% solution keeping the temperature at 12°C. After 36 hours the reaction mixture was washed with water until the pH was less than 9 to obtain the crude product which was distilled

A 5 liter jacketed flask equipped with a mechanical stirrer was charged with 1450 grams of the 3,3-bis(bromomethyl)oxetane and 1720 ml of toluene. The mixture was stirred and heated to 60°C before 1600 ml of water, 14.7 grams of tetrabutylammonium bromide, and 862 grams of sodium azide were added. After 24 hours, the reaction mixture was cooled to room temperature and washed three times with 2000 ml of water. The toluene and water were removed from the organic layer by distillation to give pure 3,3-bis(azidomethyl)oxetane at 85% yield.

Under an argon atmosphere, 14.94 grams of butane diol was added to a flame dried 5 liter round-bottomed flask charged with 1340 ml of dry methylene chloride. To this mixture, 11.77 grams of borontrifluoride-etherate was added and the reaction was allowed to proceed for one hour at room temperature. The reactor was then cooled to -10°C and 937.78 grams of the 3,3-bis(azidomethyl)oxetane was added. The solution was allowed to come to room temperature and left to react for three days. The reaction was then quenched by the addition of 50 ml of saturated brine solution. The organic phase was separated off and washed with 100 ml of 10 wt% sodium bicarbonate solution before the solvent was removed on a rotovapor. The resulting liquid was then poured into 5 liters of methanol to precipitate the polymer, which was filtered from the solution and dried under vacuum at 30°C.

#### EXAMPLE 2 (poly(3-azidomethyl-3-methyloxetane))

A 5 liter jacketed flask equipped with a mechanical stirrer was charged with 1062 grams of sodium azide, 1972 ml of water, and 2450 grams of 3-bromomethyl-3-methyloxetane (supplied by AmeriBrom, Inc. of New York). This mixture was brought to reflux with vigorous mixing. After 48 hours the mixture was cooled to room temperature. The organic layer was separated off and washed three times with 1000 ml of water before being dried over molecular sieves to yield pure 3-

Under an argon atmosphere, 14.94 grams of butane diol was added to a flame dried 5 liter round-bottomed flask charged with 1.340 ml of dry methylene chloride. To this mixture, 11.77 grams of borontrifluoride-etherate was added and the reaction was allowed to proceed for one hour at room temperature. The reactor was then  
5 cooled to -10°C and 937.78 grams of the 3-azidomethyl-3-methyloxetane was added. The solution was allowed to come to room temperature and left to react for three days. The reaction was then quenched by the addition of 50 ml of saturated brine solution. The organic phase was separated off and washed with 100 ml of 10 wt% sodium bicarbonate solution before the solvent was removed on a rotovapor. The resulting  
10 liquid was then poured into 5 liters of methanol to precipitate the polymer, which was filtered from the solution and dried under vacuum at 30°C.

EXAMPLE 3 (Random block copolymer of poly(3-azidomethyl-3-methyloxetane) and poly(3,3-bis(azidomethyl)oxetane) in THF)

In a one liter round bottom flask, 65 grams of dry difunctional poly(3-  
15 azidomethyl-3-methyloxetane) with a hydroxyl equivalent weight of 3121 and 35 grams of dry poly(3,3-bis(azidomethyl)oxetane) with a hydroxyl equivalent weight of 3235 were dissolved in 650 grams of dry tetrahydrofuran. The solution was concentrated and dried by evaporation of the tetrahydrofuran under reduced pressure via a rotovapor until 100 grams of the solvent remained. To this solution, 0.1 grams  
20 of diphenyltin dichloride and 5.41 grams of toluene-2,4-diisocyanate were added while stirring with a magnetic stirrer at ambient temperature and pressure. After 24 hours, 1.40 grams of butane-1,4-diol was added causing the solution to become steadily more viscous. After another 24 hours, the solution was poured into methanol in a volume ratio of 1:5. The methanol was decanted off, and the precipitated  
25 polymer was washed three times with fresh methanol (1:5 volume ratio) to give a rubbery granular product with the properties set forth below:

$$M_w/M_n = 5.9$$

$$E^{1.0}(\text{psi}) = 754$$

$$\epsilon_m(\%) = 204$$

$$\epsilon_f(\text{failure})(\%) = 229$$

$$5 \quad \sigma_m(\text{psi}) = 180$$

$$\sigma_m(\text{corrected})(\text{psi}) = 558$$

$$\text{ShoreA} = 64$$

EXAMPLE 4 (Random block copolymer of poly(3-azidomethyl-3-methyloxetane) and poly(3,3-bis(azidomethyl)oxetane) in THF)

10 In a 100 ml round bottom flask, 6.5 grams of dry difunctional poly(3-azidomethyl-3-methyloxetane) with a hydroxyl equivalent weight of 3040 and 3.5 grams of dry poly(3,3-bis(azidomethyl)oxetane) with a hydroxyl equivalent weight of 3235 were dissolved in 60 ml of dry tetrahydrofuran. The solution was concentrated and dried by evaporation of the tetrahydrofuran under reduced pressure via a  
 15 rotovapor until 10 grams of the solvent remained. To this solution, 0.25 ml of dibutyltin dilaurate and 0.561 grams of toluene-2,4-diisocyanate were added while stirring with a magnetic stirrer at ambient temperature and pressure. After 15 minutes, 0.145 grams of butane-1,4-diol was added causing the solution to become steadily more viscous. After another 30 minutes, the solution was poured into  
 20 methanol in a volume ratio of 1:5. The methanol was decanted off, and the precipitated polymer was washed three times with fresh methanol (1:5 volume ratio) to give a rubbery granular product with the properties set forth below:

$$M_n = 15404$$

$$M_w = 67277$$

$$25 \quad M_w/M_n = 4.37$$

EXAMPLE 5 (Poly(3-azidomethyl-3-methyloxetane)-b-poly(3,3-bis(azidomethyl)oxetane))

100 mg of 3-azidomethyl-3-methyloxetane and 100 mg of 3,3-bis(azidomethyl)oxetane were

azidomethyl-3-methyloxetane) with a hydroxyl equivalent weight of 3040 and 3.5 grams of dry poly(3,3-bis(azidomethyl)oxetane) with a hydroxyl equivalent weight of 3235 were dissolved in 60 ml of dry 1,4-dioxane. The solution was concentrated and dried by evaporation of the 1,4-dioxane under reduced pressure via a rotovapor until 5 12 grams of the solvent remained. To this solution, 0.3 ml of dibutyltin dilaurate and 0.561 grams of toluene-2,4-diisocyanate were added while stirring with a magnetic stirrer at ambient temperature and pressure. After one hour, 0.145 grams of butane-1,4-diol was added causing the solution to become steadily more viscous. After another two hours, the solution was poured into methanol in a volume ratio of 1:5. 10 The methanol was decanted off, and the precipitated polymer was washed three times with fresh methanol (1:5 volume ratio) to give a rubbery granular product with the properties set forth below:

Mn = 21230

Mw = 116272

15 Mw/Mn = 5.48

EXAMPLE 6 (Random block copolymer of poly(3-azidomethyl-3-methyloxetane) and poly(3,3-bis(azidomethyl)oxetane) in ethyl acetate)

In a 500 ml round bottom flask, 18 grams of dry difunctional poly(3-azidomethyl-3-methyloxetane) with a hydroxyl equivalent weight of 3356 and 6 20 grams of dry poly(3,3-bis(azidomethyl)oxetane) with a hydroxyl equivalent weight of 3235 were dissolved in 200 ml of dry ethyl acetate. The solution was concentrated and dried by evaporation of the ethyl acetate under reduced pressure via a rotovapor until 34 grams of the solvent remained. To this solution at 40°C, 0.024 grams of diphenyltin dichloride and 1.26 grams of toluene-2,4-diisocyanate were added while 25 stirring with a magnetic stirrer. After one hour, 0.33 grams of butane-1,4-diol was added causing the solution to become steadily more viscous. After another 48 hours.

methanol (1:5 volume ratio) to give a rubbery granular product with the properties set forth below:

Mn = 13880

Mw = 43310

5 Mw/Mn = 3.12

EXAMPLE 7 (Random block copolymer of poly(3-azidomethyl-3-methyloxetane) and poly(3,3-bis(azidomethyl)oxetane) in THF)

In a 100 ml round bottom flask, 6.5 grams of dry difunctional poly(3-azidomethyl-3-methyloxetane) with a hydroxyl equivalent weight of 3040 and 3.5  
10 grams of dry poly(3,3-bis(azidomethyl)oxetane) with a hydroxyl equivalent weight of 3235 were dissolved in 70 ml of dry tetrahydrofuran. The solution was concentrated and dried by evaporation of the tetrahydrofuran under reduced pressure via a rotovapor at 50°C until 5 grams of the solvent remained. To this solution at 50°C, 0.5 ml of dibutyltin dilaurate and 0.561 grams of toluene-2,4-diisocyanate were added  
15 while stirring with a magnetic stirrer. After three minutes, 0.145 grams of butane-1,4-diol was added causing the solution to become steadily more viscous. After another five minutes, the solution was diluted with 20 ml of tetrahydrofuran and 1 ml of methanol. This solution was then precipitate in methanol in a volume ratio of 1:5. The methanol was decanted off, and the precipitated polymer was washed three times  
20 with fresh methanol (1:5 volume ratio) to give a rubbery granular product with the properties set forth below:

Mn = 17350

Mw = 103231

Mw/Mn = 5.95

25 EXAMPLE 8 (Random block copolymer of poly(azidomethyloxirane) and poly(3,3-bis(azidomethyl)oxetane))

solution 0.1 ml of dibutyltin dilaurate followed by 1.60 grams of butane-1,4-diol.  
This reaction mixture was stirred for 1 hour at room temperature.

In a separate 250 ml round bottom flask, 17.94 grams of dry difunctional  
poly(azidomethyloxirane) with a hydroxyl equivalent weight of 1174 and 6.63 grams  
of dry poly(3,3-bis(azidomethyl)oxetane) with a hydroxyl equivalent weight of 2390  
were dissolved in 100 ml of dry tetrahydrofuran. The solution was concentrated and  
dried by evaporation of the tetrahydrofuran under reduced pressure via a rotovapor  
until 20 grams of the solvent remained. To this solution, 75 ml of dibutyltin dilaurate  
and 3.097 grams of toluene-2,4-diisocyanate were added while stirring with a  
magnetic stirrer at ambient temperature and pressure. After one hour, the urethane  
oligomer was added to this solution, causing the solution to become steadily more  
viscous. After 20 minutes, the solution was too viscous to stir and was diluted with  
20 ml of dry tetrahydrofuran and allowed to react for a further 20 minutes before  
being poured into methanol in a volume ratio of 1:5. The methanol was decanted off,  
and the precipitated polymer was washed three times with fresh methanol (1:5 volume  
ratio) to give a rubbery granular product with the properties shown in FIGS. 1 and 2  
and set forth below:

Mn = 26240

Mw = 175500

Mw/Mn = 6.69

Molecular weight distribution was determined by gel permeation  
chromatography using polystyrene standards, with the results shown in FIG. 1. The  
GPC trace in FIG. 1 demonstrates that the prepolymers were linked to produce a  
copolymer having a higher molecular weight and dispersivity than the homopolymer  
blocks. The DMA trace in FIG. 2 shows the melt transition of random block  
(BAMO-GAP) at 75-80°C with a material modulus reducing only slowly before this

EXAMPLES 9-11 (Random block copolymer of poly(3-azidomethyl-3-methyloxetane) and poly(3,3-bis(azidomethyl)oxetane) linked with a urethane oligomer)

In a 500 ml round bottom flask, 45 grams of difunctional poly(3-azidomethyl-3-methyloxetane) with a hydroxyl equivalent weight of 3125 and 15 grams of poly(3,3-bis(azidomethyl)oxetane) with a hydroxyl equivalent weight of 3152 were dissolved in 300 ml of tetrahydrofuran. The solution was concentrated and dried by evaporation of the tetrahydrofuran or a rotovapor until a solution with 90 grams of solvent remained. To this solution 0.6 grams of dibutyltin dichloride and 3.34 grams of toluene-2,4-diisocyanate was added and the mixture allowed to react for 3 hours to end-cap the prepolymer.

For Example 9, 0.22 grams of butanediol was added to one quarter of the isocyanate end-capped prepolymer mixture. The reaction was allowed to continue for 14 hours before it was precipitated with methanol in a volume ratio of 1:5. The methanol was decanted off, and the precipitated polymer was washed three times with fresh methanol (1:5 volume ratio) to give a rubbery granular product.

For Example 10, a urethane oligomer was derived from a mixture of 2 ml of tetrahydrofuran, 0.42 grams of toluene-2,4-diisocyanate, 0.43 grams of butane-1,4-diol, and 0.1 grams of dibutyltin dichloride, which were allowed to react for one hour. The urethane oligomer was then added to one quarter of the isocyanate end-capped prepolymer mixture and allowed to react for 14 hours before it was precipitated with methanol in a volume ratio of 1:5. The methanol was decanted off, and the precipitated polymer was washed three times with fresh methanol (1:5 volume ratio) to give a rubbery granular product.

For Example 11, a urethane oligomer was derived from a mixture of 2 ml of

hours. The urethane oligomer was then added to one quarter of the isocyanate end-capped prepolymer mixture and allowed to react for 14 hours before it was precipitated with methanol in a volume ratio of 1:5. The methanol was decanted off, and the precipitated polymer was washed three times with fresh methanol (1:5 volume ratio) to give a rubbery granular product.

TABLE

	Example 9	Example 10	Example 11
diol:diisocyanate molar ratio	1:0	2:1	3:2
Mn	11440	12340	13240
Mw	134800	142000	122600
Mw/Mn	11.78	11.51	9.26
E <sup>1.0</sup>	520	669	823
$\epsilon_m$ (%)	311	897	536
$\epsilon_f$ (failure) (%)	372	1082	562
$\sigma_m$ (psi)	153	345	300
$\sigma_m$ (corrected) (psi)	678	3575	2381
ShoreA	49	60	65

The foregoing detailed description of the preferred embodiments of the invention has been provided for the purpose of explaining the principles of the invention and its practical application, thereby enabling others skilled in the art to understand the invention for various embodiments and with various modifications as are suited to the particular use contemplated. The foregoing detailed description is not intended to be exhaustive or to limit the invention to the precise embodiments disclosed. Modifications and equivalents will be apparent to practitioners skilled in this art and are encompassed within the spirit and scope of the appended claims.

## WHAT IS CLAIMED IS:

1. A method of preparing a thermoplastic elastomer having A blocks which are crystalline at temperatures below about 75°C and the B blocks which are amorphous at temperatures above about -20°C, the method comprising:

- 5 (a) dissolving the A blocks and B blocks terminated with respective isocyanate-reactive groups at approximately the stoichiometric ratios that are intended to be present in the thermoplastic elastomer into solution comprising at least one non-halogenated solvent, the A blocks being crystalline at temperatures below about 75°C and derived from monomers comprising at least one member selected from the group  
10 consisting of oxetane derivatives and tetrahydrofuran derivatives, the B blocks being amorphous at temperatures above about -20°C and derived from monomers comprising at least one member selected from the group consisting of oxetane and derivatives thereof, tetrahydrofuran and derivatives thereof, and oxirane and derivatives thereof;
- 15 (b) drying the dissolved A blocks and B blocks of water by azeotropic distillation of the non-halogenated solvent;
- (c) end-capping the dried A blocks and the dried B blocks in the non-halogenated solvent by reacting the dried A blocks and the dried B blocks with at least one diisocyanate in which a first isocyanate moiety thereof is substantially more  
20 reactive with the terminal groups of the blocks as a second isocyanate moiety thereof, whereby the more reactive first isocyanate moiety is capable of reacting with the terminal groups of the blocks, leaving the less reactive second isocyanate moiety free and unreacted; and
- (d) linking the end-capped A blocks and the end-capped B blocks together  
25 in the non-halogenated solvent with at least one linking compound comprising two isocyanate-reactive groups which are sufficiently sterically unhindered to react with

2. A method as defined in claim 1, wherein said dissolving step (a) comprises separately dissolving the A blocks and the B blocks into respective solutions.

3. A method as defined in claim 2, wherein said end-capping step (c) comprises separately end-capping the A blocks and the B blocks in the respective solutions.

4. A method as defined in claim 1, wherein said steps (a), (b), (c), and (d) are conducted in the absence of any halogenated solvent.

5. A method as defined in claim 1, wherein the non-halogenated solvent comprises one or more organic ethers.

6. A method as defined in claim 5, wherein the organic ether comprises one or more members selected from the group consisting of tetrahydrofuran, ethylene glycol dimethyl ether, and 1,4-dioxane.

7. A method as defined in claim 6, wherein the organic ether comprises tetrahydrofuran.

8. A method as defined in claim 1, wherein the non-halogenated solvent comprises one or more organic esters.

9. A method as defined in claim 8, wherein the organic ester comprises ethyl acetate.

10. A method as defined in claim 1, wherein the non-halogenated solvent comprises one or more organic ketones.

11. A method as defined in claim 10, wherein the organic ketone

12. A method as defined in claim 1, wherein the linking compound is derived from at least one diisocyanate and at least one difunctional urethane oligomer comprising two functional groups which are reactive with isocyanate moieties of the diisocyanate.

5 13. A method as defined in claim 1, wherein:

the first isocyanate moiety of the diisocyanate is at least five times more reactive with the terminal groups of each of the blocks as the second isocyanate moiety, whereby the more reactive first isocyanate moiety is capable of reacting with and end capping the terminal groups of the blocks, leaving the less reactive second  
10 isocyanate moiety free and unreacted; and

the linking compound has two isocyanate-reactive hydroxyl groups which are sufficiently sterically unhindered to be reactive with the free and unreacted second isocyanate groups of the end-capped blocks.

14. A method as defined in claim 1, wherein the diisocyanate comprises  
15 toluene diisocyanate.

15. A method as defined in claim 1, wherein the thermoplastic elastomer has a weight average molecular weight of at least 40,000 and a number average molecular weight of at least 10,000.

16. A method as defined in claim 1, wherein the thermoplastic elastomer  
20 has a weight average molecular weight of at least 60,000 and a number average molecular weight of at least 12,000.

17. A method as defined in claim 1, wherein the thermoplastic elastomer has a weight average molecular weight of at least 80,000 and a number average molecular weight of at least 15,000.

18. A method as defined in claim 1, wherein the isocyanate-reactive terminal groups of the A and B blocks are hydroxyl groups.

19. A method of making an energetic composite binder comprising:

(a) dissolving the A blocks and B blocks terminated with respective  
5 isocyanate-reactive groups at approximately the stoichiometric ratios that are intended to be present in the thermoplastic elastomer into solution comprising at least one non-halogenated solvent, the A blocks being crystalline at temperatures below about 75°C and derived from monomers comprising at least one member selected from the group consisting of oxetane derivatives and tetrahydrofuran derivatives, the B blocks being  
10 amorphous at temperatures above about -20°C and derived from monomers comprising at least one member selected from the group consisting of oxetane and derivatives thereof, tetrahydrofuran and derivatives thereof, and oxirane and derivatives thereof;

(b) drying the dissolved A blocks and B blocks of water by azeotropic  
15 distillation of the non-halogenated solvent;

(c) end-capping the dried A blocks and the dried B blocks in the non-halogenated solvent by reacting the dried A blocks and the dried B blocks with at least one diisocyanate in which a first isocyanate moiety thereof is substantially more reactive with the terminal groups of the blocks as a second isocyanate moiety thereof,  
20 whereby the more reactive first isocyanate moiety is capable of reacting with the terminal groups of the blocks, leaving the less reactive second isocyanate moiety free and unreacted;

(d) linking the end-capped A blocks and the end-capped B blocks together in the non-halogenated solvent with at least one linking compound comprising two  
25 isocyanate-reactive groups which are sufficiently sterically unhindered to react with the free and unreacted isocyanate moieties of the end-capped polymers; and

wt% of at least one solid selected from the group consisting of fuel material particulates and oxidizer particulates.

20. A method as defined in claim 19, wherein said dissolving step (a) comprises separately dissolving the A blocks and the B blocks into respective  
5 solutions.

21. A method as defined in claim 20, wherein said end-capping step (c) comprises separately end-capping the A blocks and the B blocks in the respective solutions.

22. A method as defined in claim 19, wherein said steps (a), (b), (c), and  
10 (d) are conducted in the absence of any halogenated solvent.

23. A method as defined in claim 19, wherein the non-halogenated solvent comprises one or more organic ethers.

24. A method as defined in claim 23, wherein the organic ether comprises one or more members selected from the group consisting of tetrahydrofuran, ethylene  
15 glycol dimethyl ether, and 1,4-dioxane.

25. A method as defined in claim 23, wherein the organic ether comprises tetrahydrofuran.

26. A method as defined in claim 19, wherein the non-halogenated solvent comprises one or more organic esters.

20 27. A method as defined in claim 26, wherein the organic ester comprises ethyl acetate.

28. A method as defined in claim 19, wherein the non-halogenated solvent

29. A method as defined in claim 28, wherein the organic ketone comprises methyl ethyl ketone.

30. A method of making a rocket motor propellant comprising making a binder as defined in claim 19.

5 31. A method of making a gun propellant comprising making a binder as defined in claim 19.

32. A method of making an explosive comprising making a binder as defined in claim 19.

10 33. A method of making a gasifier comprising making a binder as defined in claim 19.

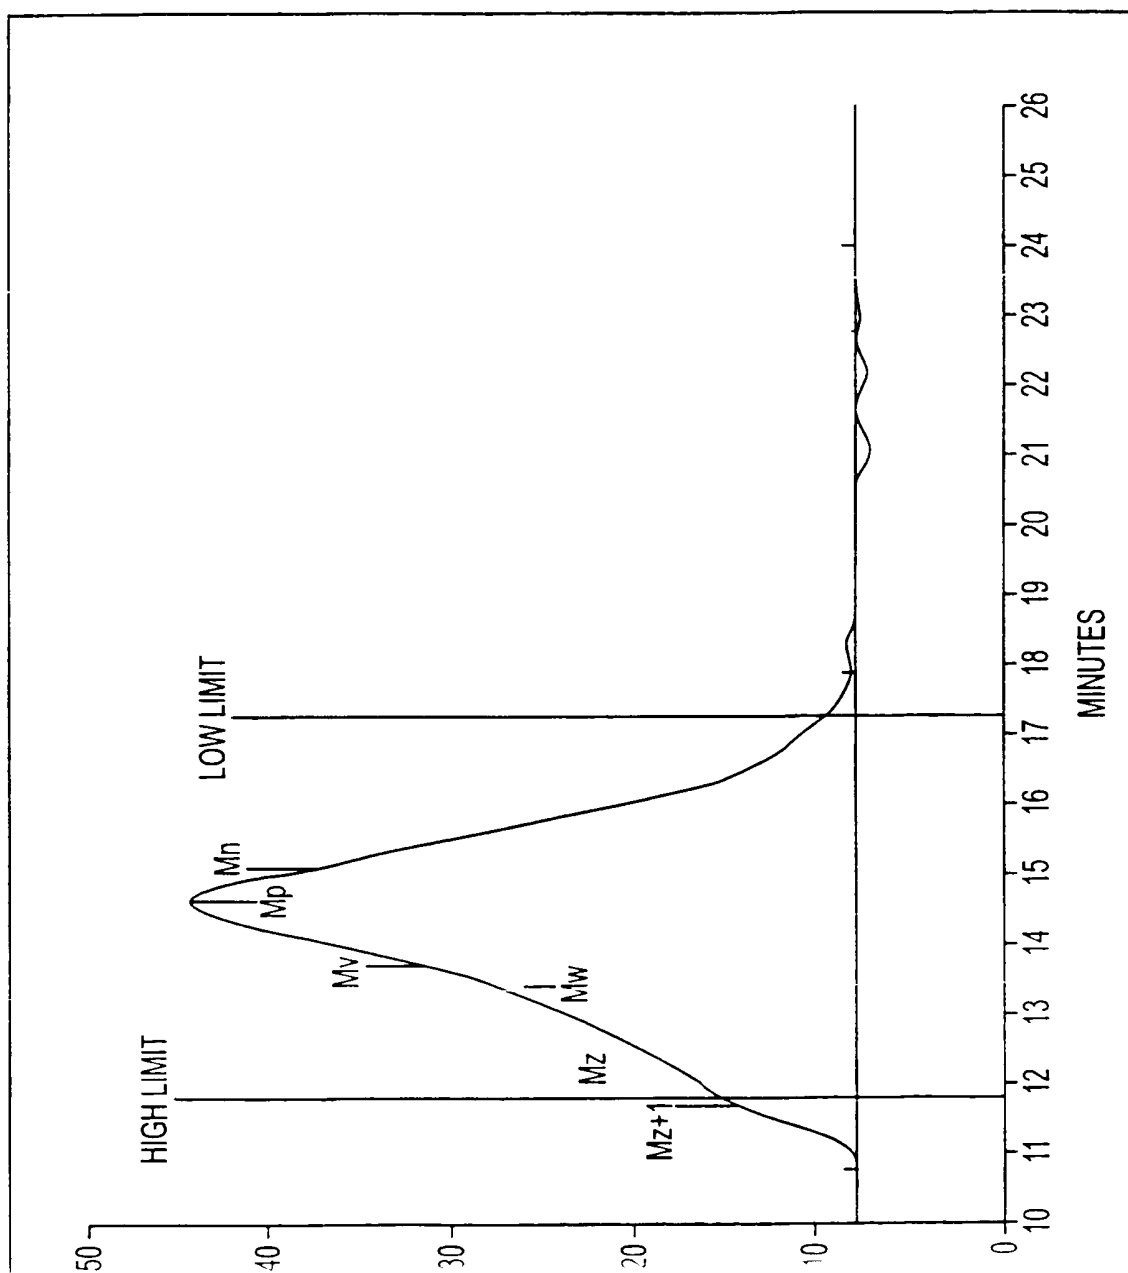


FIG. 1

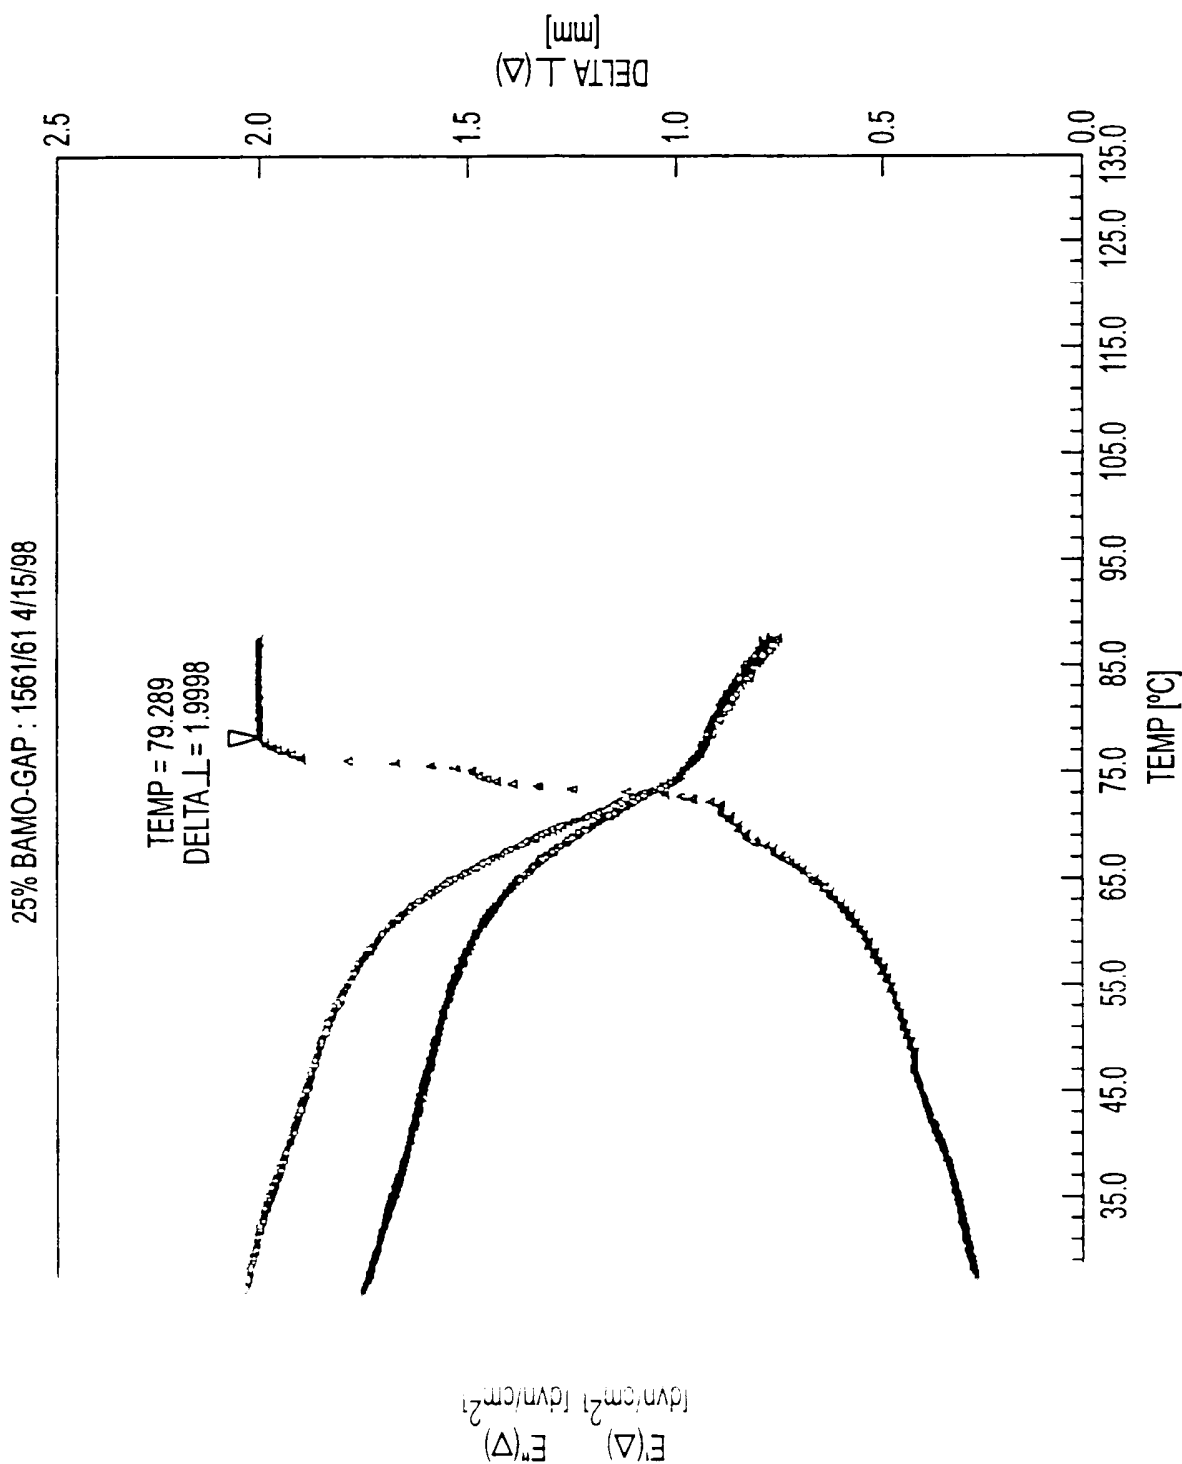


FIG. 2

## APPLICATION UNDER UNITED STATES PATENT LAWS

JC08 Rec'd PCT/PTO C 7 MAY 2001

Invention: SYNTHESIS OF ENERGETIC THERMOPLASTIC ELASTOMERS  
CONTAINING OLIGOMERIC URETHANE LINKAGES  
Inventor(s): Andrew J. SANDERSON, Wayne EDWARDS

Pillsbury Madison & Sutro LLP  
Intellectual Property Group  
1100 New York Avenue, N.W.  
Ninth Floor, East Tower  
Washington, D.C. 20005-3918  
Attorneys  
Telephone: (202) 851-3000

This is a:

- ☐ Provisional Application
- ☒ Regular Utility Application
- ☐ Continuing Application
- ☐ PCT National Phase Application
- ☐ Design Application
- ☐ Reissue Application
- ☐ Plant Application
- ☐ Substitute Specification  
Sub. Spec. filed \_\_\_\_\_  
in App. No. \_\_\_\_\_ / \_\_\_\_\_
- ☐ Marked Up Specification re  
Sub. Spec. filed \_\_\_\_\_

SPECIFICATION